


CWL – Series - CrossWeb Labeller



CrossWeb Labelling Systems
Specially constructed to mount directly on your packaging machine

INVEST IN YOUR FUTURE

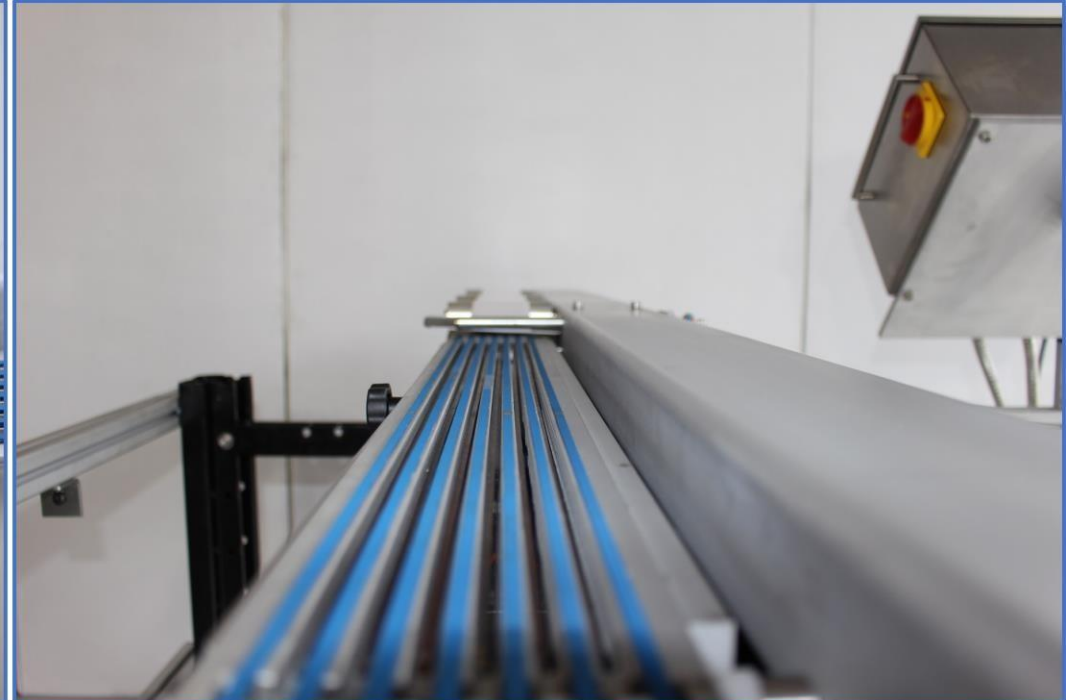

The CWL Labeller is designed for high - speed labelling on to thermoforming machines for vacuum packing.

Using a vacuum chamber, a whole row of labels is applied at a time.

The modular construction can be mounted without difficulty on to any thermoformer.

The machine meets the requirements of the food industry and the medical sector.

Label printing modules for date coding, bar code or product information can be attached.



INVEST IN YOUR FUTURE



EASY CONTROL ACCESS
AND PROGRAMMING



ADVANTAGES

Practical and cost - effective labelling.
solution for thermoformed packages.

Proven control technology for flexible
packaging production.

Modular components for absolute flexibility.

Worldwide installation and 24/7 technical
support.

www.baumann-packagingsystem.com

Tel: 02 720 521 70

TOP OR BOTTOM MOUNTED CWL - LABELING SYSTEM



The CWL – CrossWeb Top or Bottom
Labeler is designed to easily mount on to
your thermofirming packaging machine.

The high speed CWL – CrossWeb labeller
increase productivity compared to. off -
line labeling.

CWL – Labellers are made in Australia.

Parts are local available.

CWL – labellers are robust built for harsh
environments. The control system
features a full color 12” touchscreen with
graphic icons and illustrations that make
it intuitive to operate and easier to
adjust parameters.

TECHNICAL DATA	CWL - Sanitary labeller
Label liner width	100 mm, 150 mm, 200 mm
Chamber length	420, 520, 620, & 720 mm
Label length	25 - 200 mm
Label detector	Capacitive
Label reel core & unwinder diameter	Ø 40mm - Optional: Ø 76mm / 380 or Ø 400mm
Labelling speed	0-60m/min (depending on label width) - up to 30 strokes per minute
Labelling accuracy	+/- 0.5mm
Drive motor	Servo motor / stepper motor
Material	Anodized aluminium & stainless steel
Operator side	Right- and left-hand version available
Applicator stroke length	150 mm (as standard) or 225 mm
Across	1 - 20 labels (depend on label size)
Rows	1 - 20 label rows (depend on label size)
Applicable thermoformers	Mounted on: Multivac, SmartVavc, Variovac, Mecapack, Webomatic, Sealpac, Ilpra, Ulma,WM Thermoforming, Ilapack, Kiefel
Display	HMI control
Program database	30 programs
Electronics	PLC controlled (optional, AB, Siemens, Beckhoff)
Label detector adjustment	Quick teach
Interface	RS 232 for remote control & integration of external operator panels (HMI)
IP Protection	IP 54 / Control enclosure IP-65
Weight	Approx. 66 kg
Voltage/Power	230 V/ 400 W
Air consumption	4-6 bar, 7l pr/hour
Warranty	1 year with 16 hours of operation per day, 5 days a week
Weight	38 Kg