


Conveyor Belt Bottom Labeller

MODEL KB-330

Powerfull labelling systems for the most demanding applications

- Operates at speeds up to 40 m/ min.
- Variable speed control
- Split conveyor belt for accurate labelling
- Conveyor mounted
- Horizontal dispenser adjustment
- Quick release for fast label change
- Robust construction
- Operator friendly

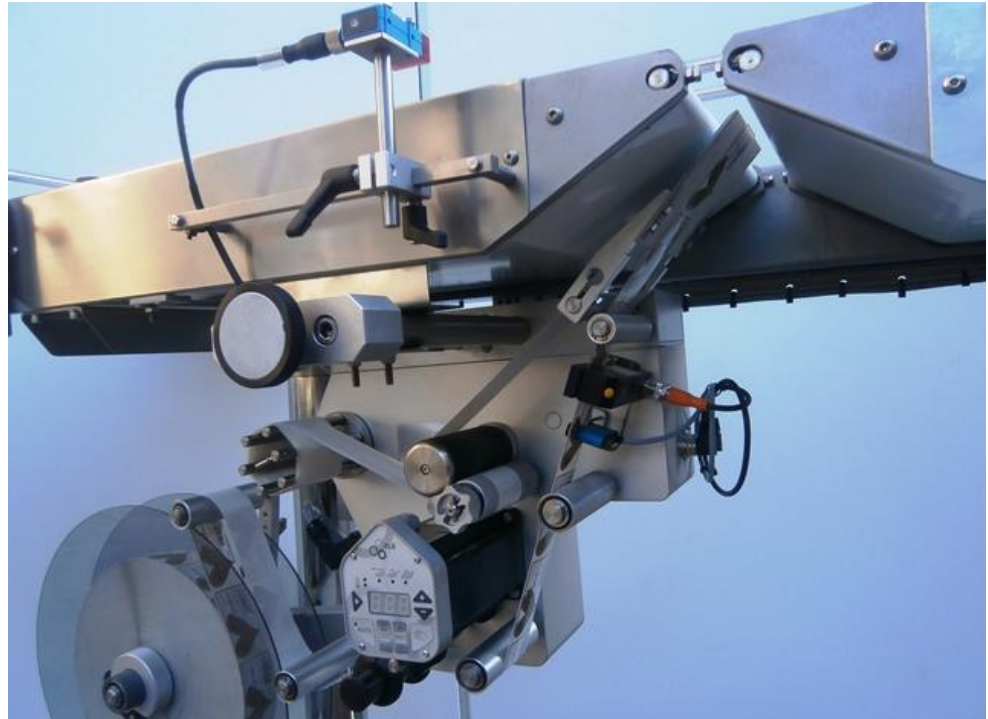

Comprehensive guarantee, backed with full after sales support and spare parts availability.

Description:

The KB - 330 self - adhesive label applicator is designed for integration into packaging lines where production speeds and reliability are of paramount importance.

Integrated Systems:

The KB - 330 is designed to be integrated into existing packaging lines. It can be used with a variety of label materials and is suitable for a wide range of applications. The machine is designed to be easy to maintain and operate.


Synchronization:

The KB - 330 is designed to be synchronized with the conveyor belt. It can be used with a variety of conveyor belt speeds and is suitable for a wide range of applications. The machine is designed to be easy to maintain and operate.

No external control panel needed:

The KB - 330 is designed to be controlled by the conveyor belt. It can be used with a variety of conveyor belt speeds and is suitable for a wide range of applications. The machine is designed to be easy to maintain and operate.

Labelling Solution

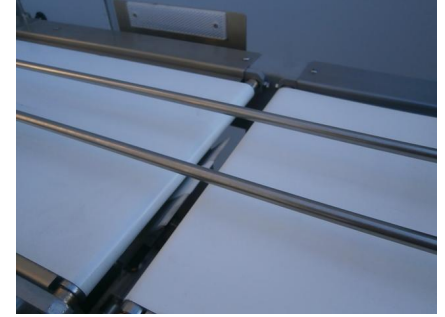

| Versions Bottom labeller | |
|------------------------------|------------------------------|
| • One labelling head | • Two labelling head |
| • 1800 mm conveyor length | • 2500 mm length |
| • 300 mm conveyor belt width | • 300 mm conveyor belt width |
| • 400 mm conveyor width | • 400 mm conveyor width |

| Operation | |
|-----------|--|
| ✓ | The labellers are operated via an integrated Graphic Display which is mounted on the labelling head. |
| ✓ | The conveyor belt system is switched on by a button on the control box. |
| ✓ | The labeller has one emergency stop button and has a safety system |
| ✓ | Menu access is password protected |
| ✓ | Hygienic stainless steel housing IP – 65 |



| Technical Data | |
|---------------------|---|
| Label strip width: | 50, 100, 150, 200 mm |
| Label rolls: | Internal or external winding core 38 -76 mm External diameter 380 mm |
| Rewinding diameter: | Maximum 250 mm (label roll) |
| Labelling speed: | Up to 40 m/ min.(higher by request) |
| Labelling output: | Approx. . 150 products / min. (depending on product and label.) |
| Label accuracy: | + / - 0.5 mm depending of equipment and product |
| Power connection: | 230 V / 50 Hz |

| Options |
|--|
| • Addition label dispenser for zero downtime labelling |
| • Transparent or mechanical label sensor |
| • Inspection equipment and ejecting station |
| • Roll - end early warning / roll - end detection |