



OSAIC


PROUD COLLECTION

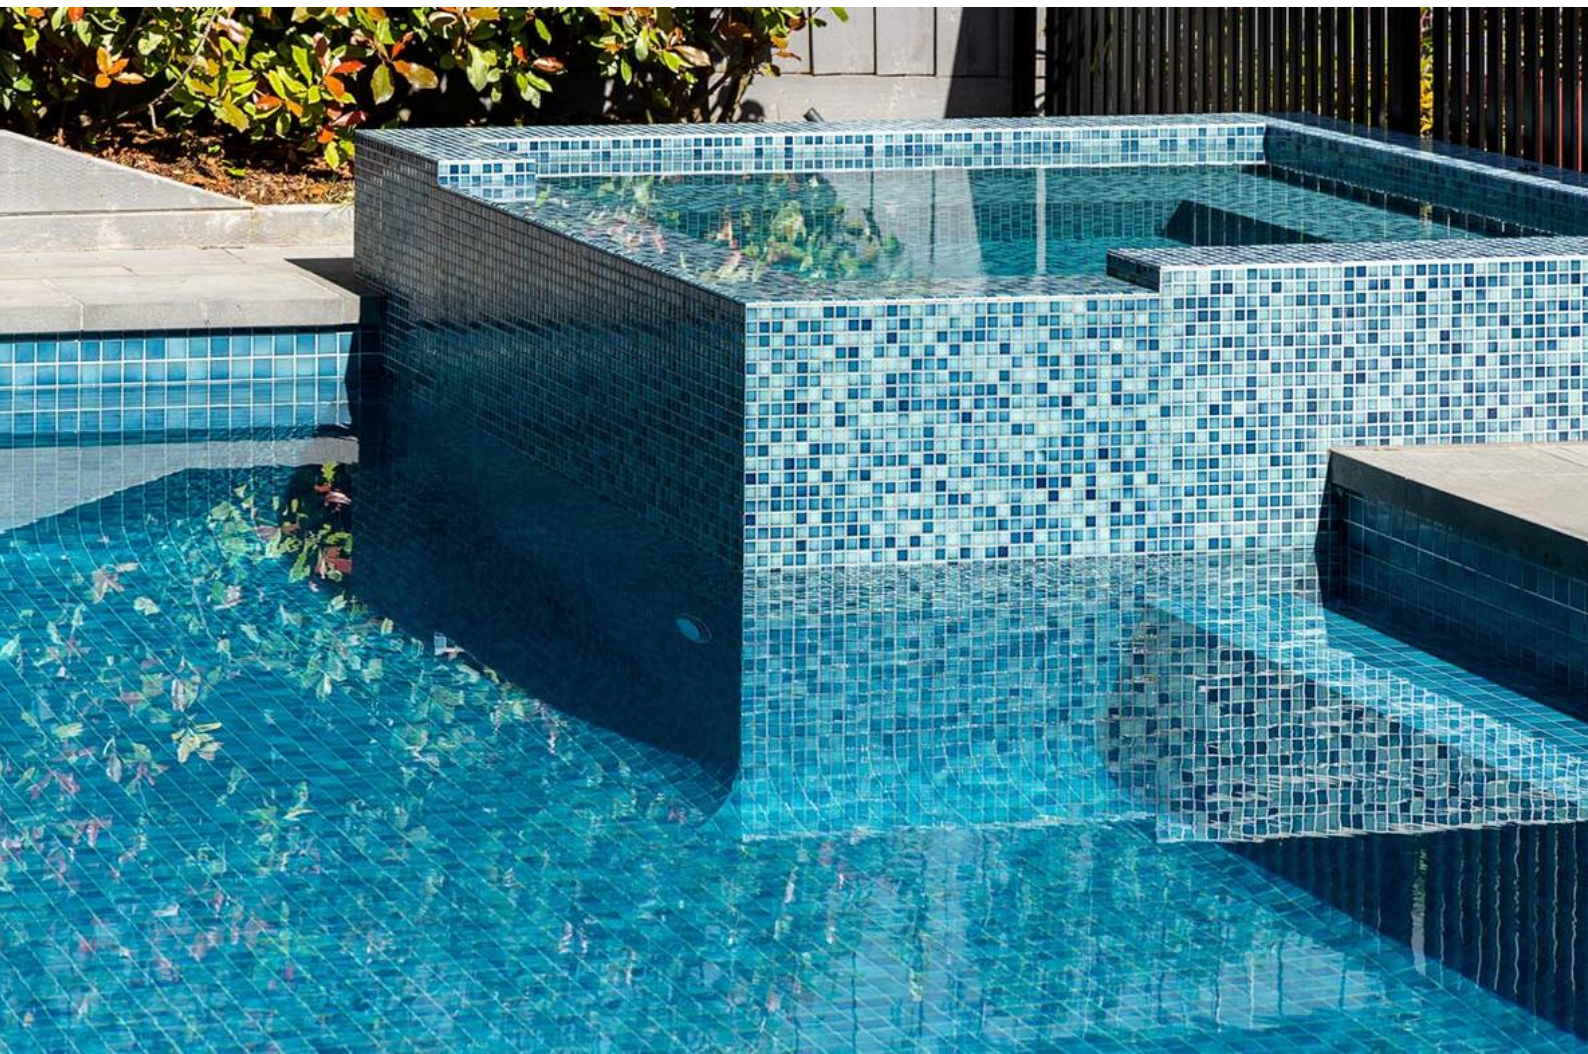


2.5X2.5cm sheet size 31.6x31.6cm




SA 501



SA 502




SA 503




SA 504




SA 505



SA 506




SA 507




SA 508




SA 509




SA 510




SA 511




SA 512



SA 513




SA 514




SA 515




2.5X2.5cm sheet size 31.6x31.6cm



SA 516




SA 517



SA 518




SA 519




SA 520



SA 521



SA 522



SA 523



SA 524



OSAIC

PROUD Collection

Piece 1" x 1" • Piece 2.5x2.5cm. Sheet 12 ½" x 12 ½" • Panel 31,6 x 31,6 cm.

SUITABILITY AREA PRODUCT & COMPOSITION GUIDE

Wall	Floor	Wet areas	Pools	Material
Int / Ext	Residential	Yes	Yes	Glass



PACKING SOLID COLORS (MESH)

SIZE / MESH	WEIGHT / BOX	M ² / BOX	PIECES / BOX	M ² / PALLET •	WEIGHT / PALLET •
31,6 x 31,6 cm. 12 ½" x 12 ½"	17,33 kg	2 m ²	20	126 m ²	1.200 kg

TECHNICAL CHARACTERISTICS

Test UNE-EN-ISO 10545-3 Water Absorption	Test UNE-EN-ISO-101-92=101 Surface hardness. Mohs	Test UNE-EN-ISO 10545-9 Resistance to thermal shocks	Test UNE-EN-ISO 10545-12 Frost resistance	Test UNE-EN-ISO 10545-13:1998 Resistance to chemical attack			
				Domestic products	Pool water additives	Low acid and alkalins	High acid and alkalins
None	4	Resistant	Resistant	GA	GA	GLA	GHA
Test UNE-EN-ISO 10545-14 Resistance to staining	Test UNE-EN-ISO 10545-11=1997 Cracking	DIN 51094 Colour Stability on exposure to light and UV rays	DCOF Wet Dynamic Coefficient of Friction ANSI A 137.1 Standard		DIN 51130:2004 SLIP Resistance wearing shoes	DIN 51097 SLIP Resistance in bare feet	Test UNE-ENV 12633:2003 (CTE) Anti skid coefficient, suitable for outdoor use and swimming pools.
Class 5	Resistant	Resistant					

WWW.BYOSAIC.COM



RECYCLE
PRODUCT

