



OSAIC


WAVY COLLECTION

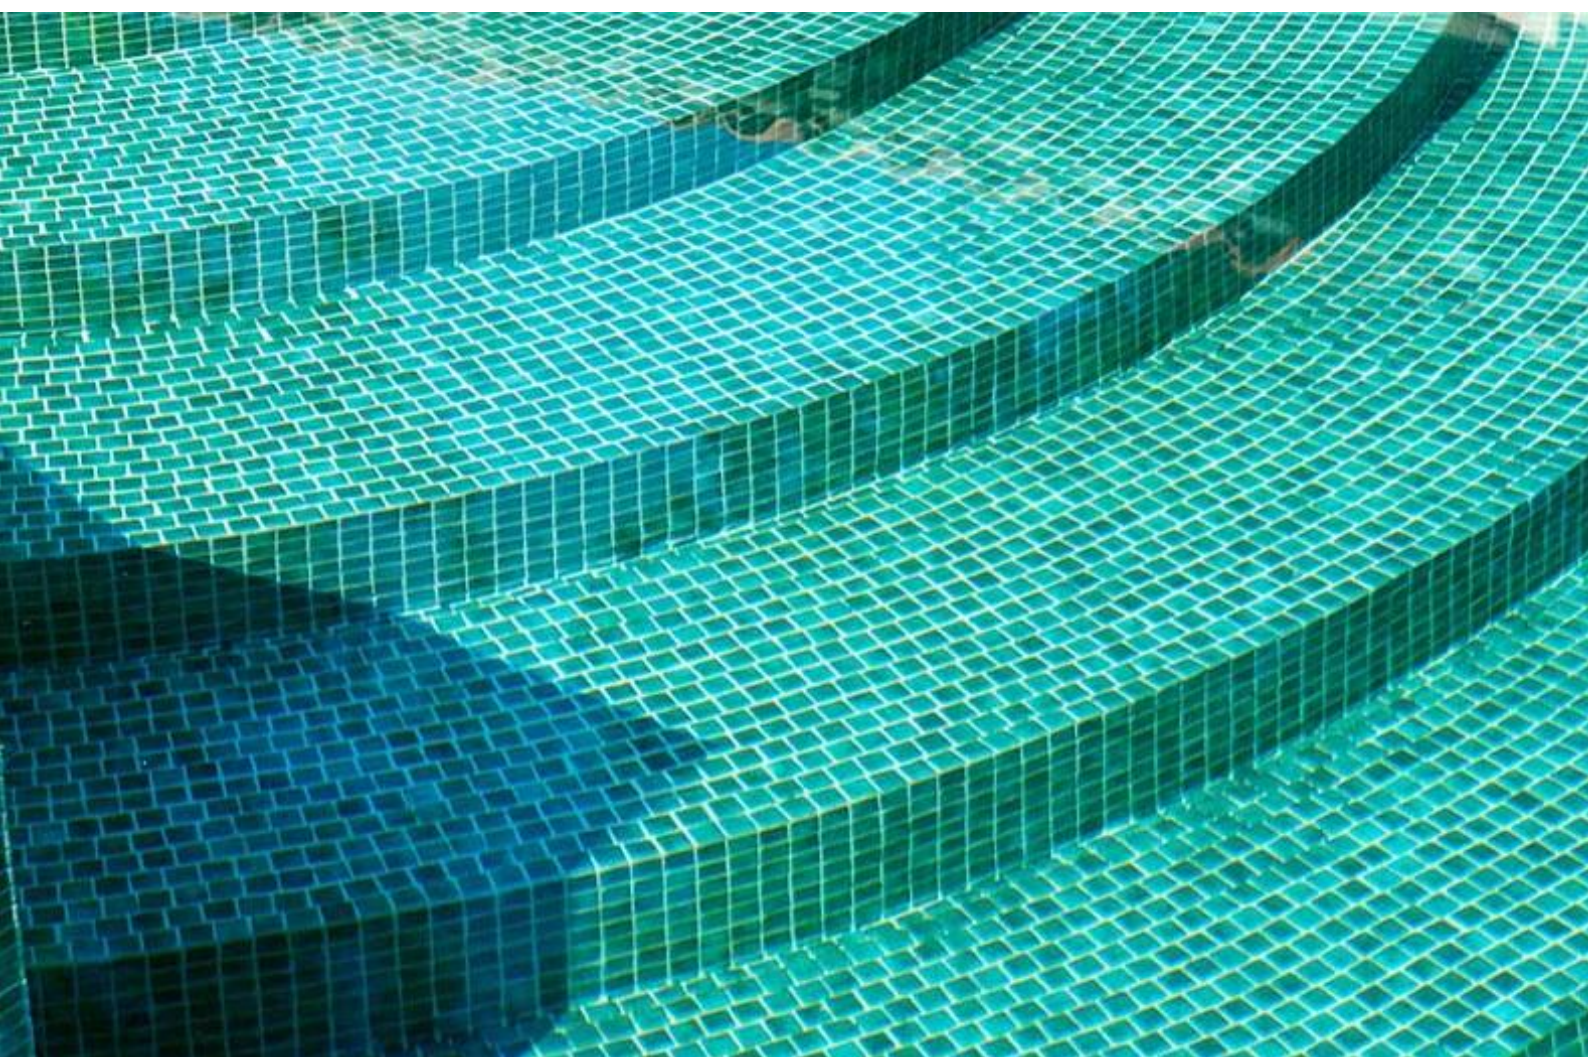


2.5X2.5cm sheet size 31.6x31.6cm




SA 101




SA 102




SA 103




SA 104




SA 105




SA 106




SA 107



SA 108



SA 109




SA 110




SA 111




SA 112



SA 113




SA 114




SA 115




2.5X2.5cm sheet size 31.6x31.6cm




SA 116




SA 117




SA 118




SA 119




SA 120




SA 121




SA 122




SA 123



SA 124



SA 125




SA 126



SA 127



SA 128




SA 129




SA 130




2.5X2.5cm sheet size 31.6x31.6cm




SA 131



SA 132



SA 133



SA 134



OSAIC

WAVY Collection

Piece 1" x 1" • Piece 2.5x2.5cm. Sheet 12 ½" x 12 ½" • Panel 31,6 x 31,6 cm.

SUITABILITY AREA PRODUCT & COMPOSITION GUIDE

Wall	Floor	Wet areas	Pools	Material
Int / Ext	Residential	Yes	Yes	Glass



PACKING SOLID COLORS (MESH)

SIZE / MESH	WEIGHT / BOX	M² / BOX	PIECES / BOX	M² / PALLET ·	WEIGHT / PALLET ·
31,6 x 31,6 cm. 12 ½" x 12 ½"	17,33 kg	2 m²	20	126 m²	1.200 kg

TECHNICAL CHARACTERISTICS

Test UNE-EN-ISO 10545-3 Water Absorption	Test UNE-EN-ISO-101-92=101 Surface hardness. Mohs	Test UNE-EN-ISO 10545-9 Resistance to thermal shocks	Test UNE-EN-ISO 10545-12 Frost resistance	Test UNE-EN-ISO 10545-13:1998 Resistance to chemical attack			
				Domestic products	Pool water additives	Low acid and alkalins	High acid and alkalins
None	4	Resistant	Resistant	GA	GA	GLA	GHA
Test UNE-EN-ISO 10545-14 Resistance to staining	Test UNE-EN-ISO 10545-11=1997 Cracking	DIN 51094 Colour Stability on exposure to light and UV rays	DCOF Wet Dynamic Coefficient of Friction ANSI A 137.1 Standard		DIN 51130:2004 SLIP Resistance wearing shoes	DIN 51097 SLIP Resistance in bare feet	Test UNE-ENV 12633:2003 (CTE) Anti skid coefficient, suitable for outdoor use and swimming pools.
Class 5	Resistant	Resistant					

WWW.BYOSAIC.COM



RECYCLE
PRODUCT

