



OSAIC

PURE COLLECTIONS


5 cm X 5 cm

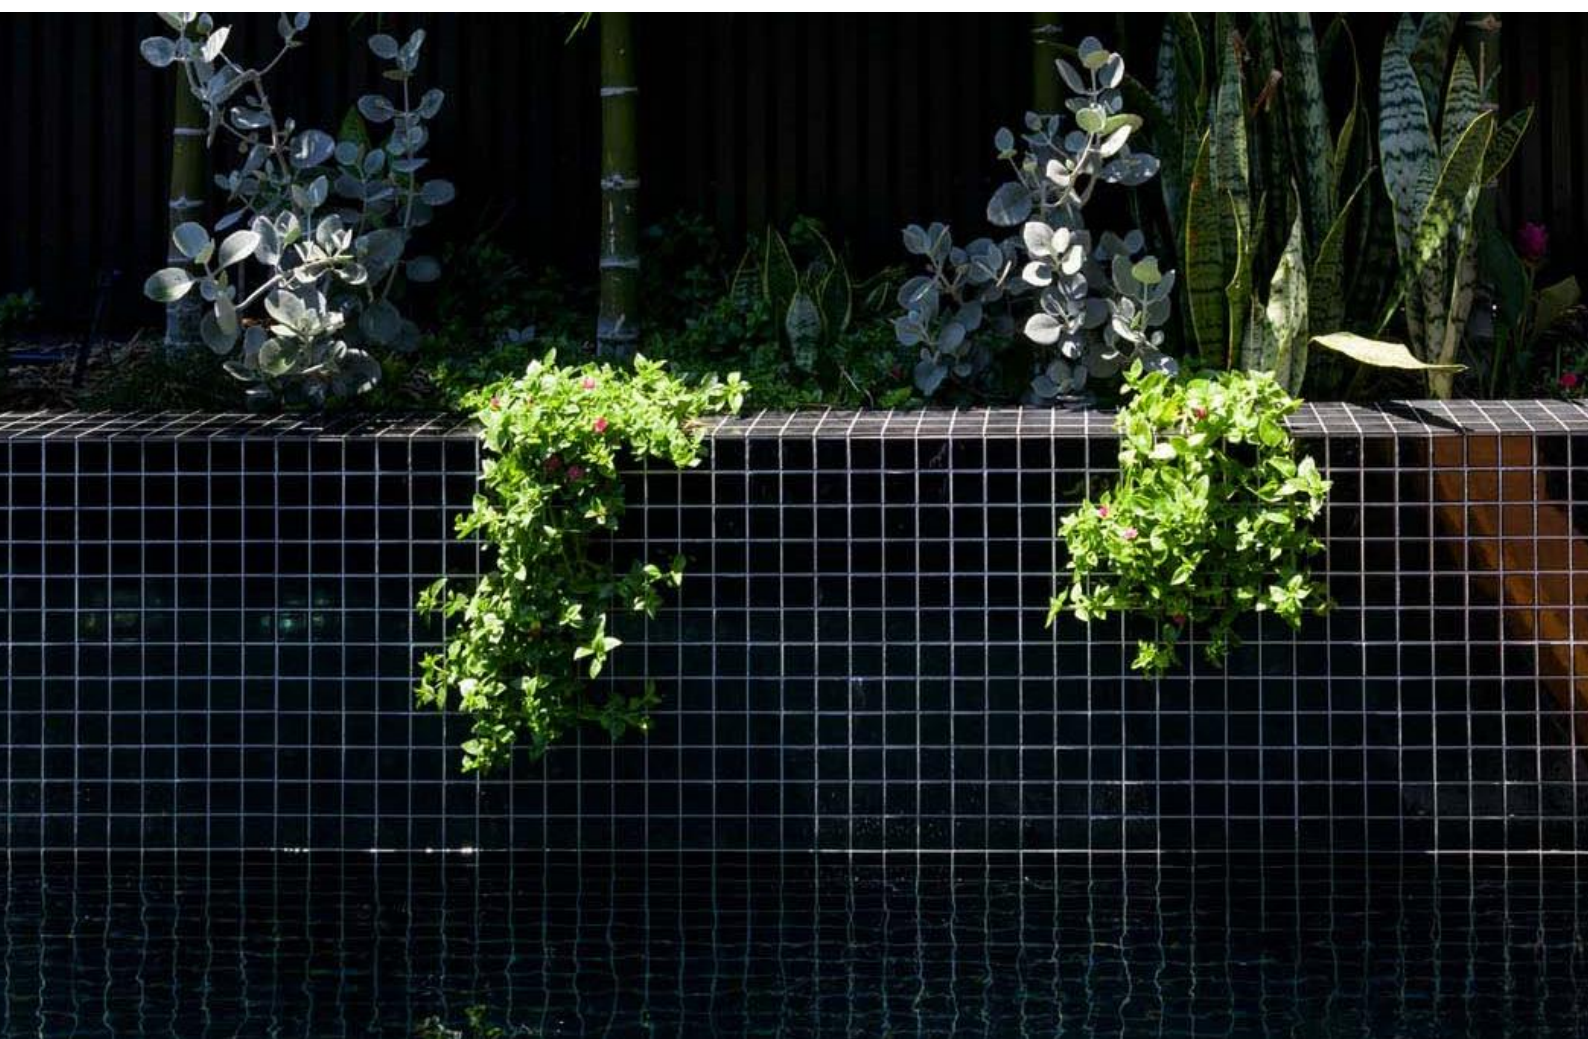


5 cm X 5 cm sheet size 31.6x31.6cm




SA 5101




SA 5102




SA 5103




SA 5104




SA 5105




SA 5106




SA 5107




SA 5108




SA 5109




SA 5110




SA 5111




SA 5112




SA 5113




SA 5114




SA 5115

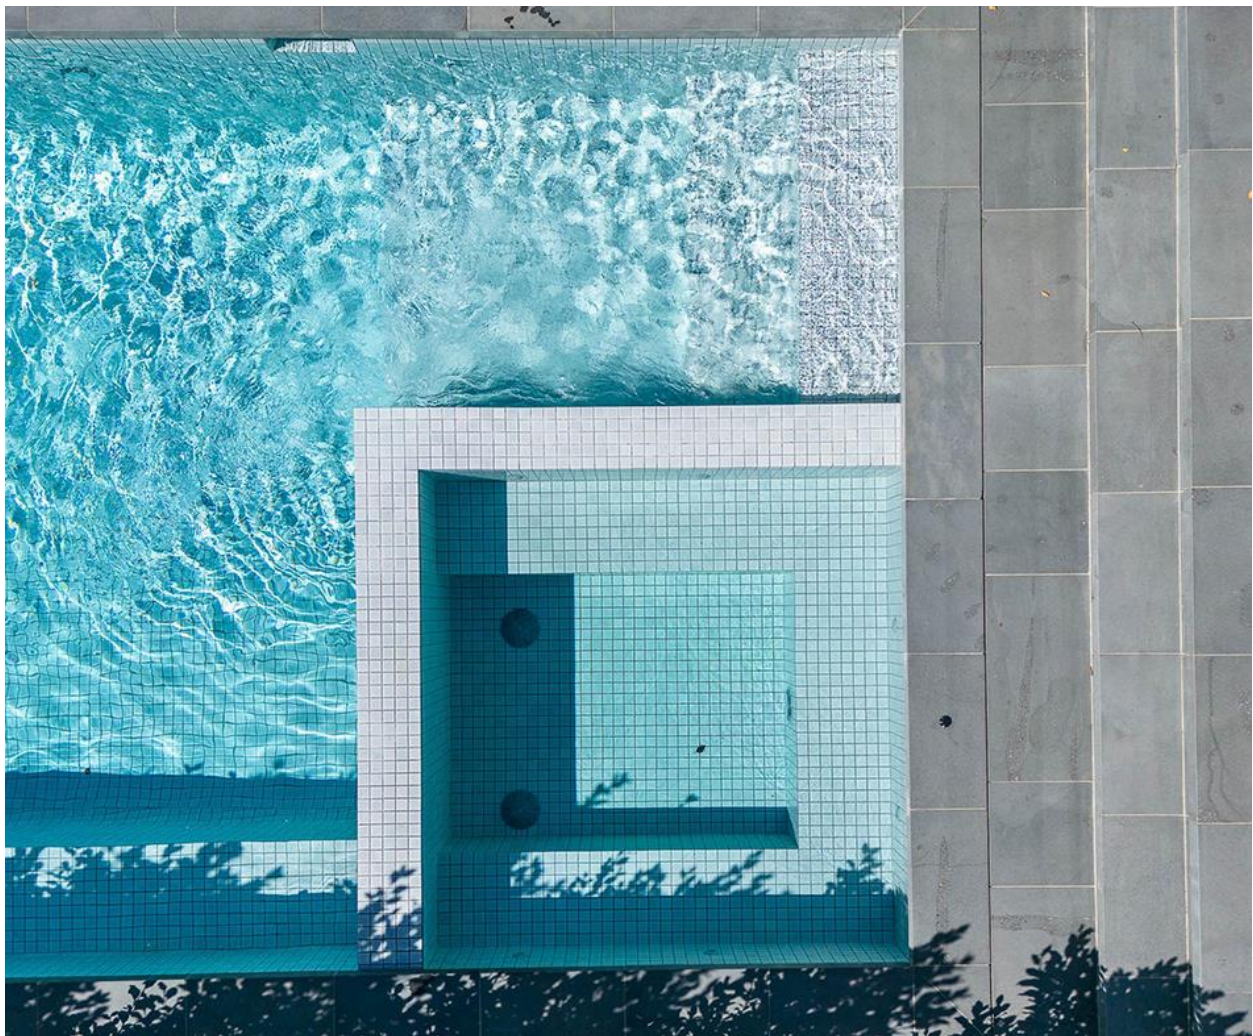


5 cm X 5 cm sheet size 31.6x31.6cm




SA 5116




SA 5117




SA 5118




SA 5119




SA 5120




SA 5121




SA 5122




SA 5123




SA 5124




SA 5125




SA 5126




SA 5127




SA 5128




SA 5129




SA 5130

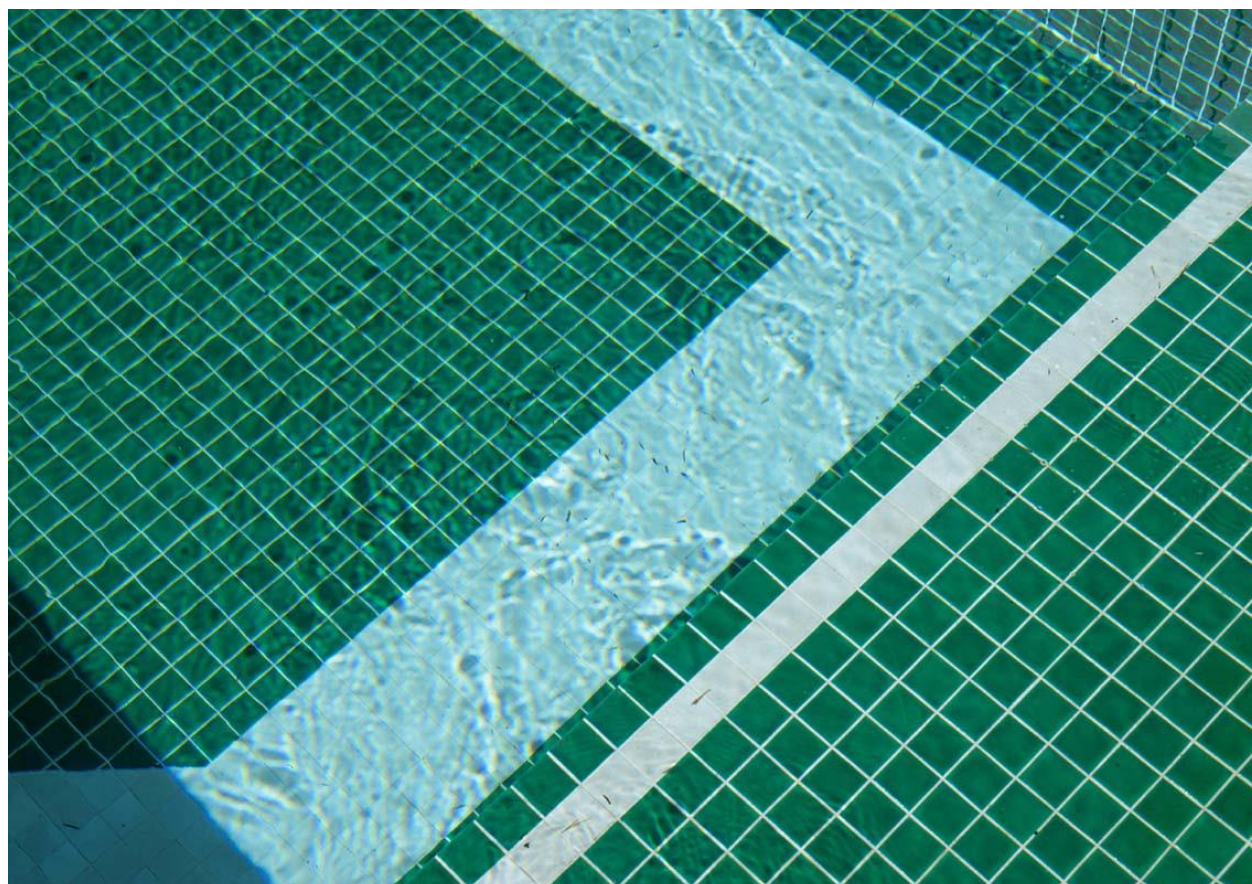


2.5X2.5cm sheet size 31.6x31.6cm




SA 5131




SA 5132




SA 5133




SA 5134




SA 5135




SA 5136




SA 5137




SA 5138




SA 5139




SA 5140




SA 5141




SA 5142




SA 5143




SA 5144



SA 5145



SA 5146

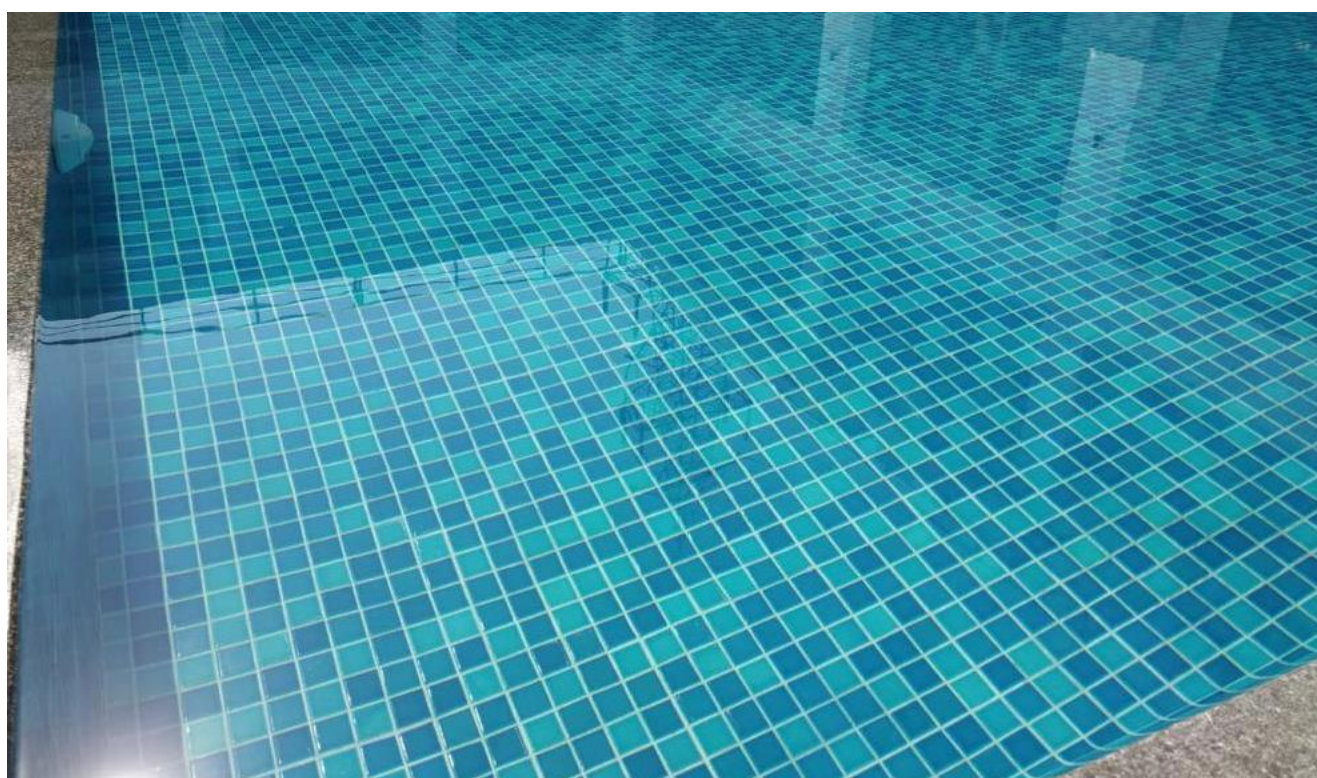

OSAIC

PURE Collection

Piece 2"x2". Piece 5x5cm. **Sheet 12 ½" x 12 ½"** • Panel 31,6 x 31,6 cm.

SUITABILITY AREA PRODUCT & COMPOSITION GUIDE

Wall	Floor	Wet areas	Pools	Material
Int / Ext	Residential	Yes	Yes	Glass



PACKING SOLID COLORS (MESH)

SIZE / MESH	WEIGHT / BOX	M² / BOX	PIECES / BOX	M² / PALLET •	WEIGHT / PALLET •
31,6 x 31,6 cm. 12 ½" x 12 ½"	21.82kg	2 m²	20	108 m²	21.82kg

TECHNICAL CHARACTERISTICS

Test UNE-EN-ISO 10545-3 Water Absorption	Test UNE-EN-ISO-101-92=101 Surface hardness. Mohs	Test UNE-EN-ISO 10545-9 Resistance to thermal shocks	Test UNE-EN-ISO 10545-12 Frost resistance	Test UNE-EN-ISO 10545-13:1998 Resistance to chemical attack			
				Domestic products	Pool water additives	Low acid and alkalins	High acid and alkalins
None	4	Resistant	Resistant	GA	GA	GLA	GHA
Test UNE-EN-ISO 10545-14 Resistance to staining	Test UNE-EN-ISO 10545-11=1997 Cracking	DIN 51094 Colour Stability on exposure to light and UV rays	DCOF Wet Dynamic Coefficient of Friction ANSI A 137.1 Standard		DIN 51130:2004 SLIP Resistance wearing shoes	DIN 51097 SLIP Resistance in bare feet	Test UNE-ENV 12633:2003 (CTE) Anti skid coefficient, suitable for outdoor use and swimming pools.
Class 5	Resistant	Resistant					

WWW.BYOSAIC.COM



RECYCLE
PRODUCT

