


## To assess yarn evenness in compliance to ASTM standards

### Fast and accurate results.

Single-traverse board winder for yarn inspection and sample viewing, used to detect irregularities in the yarn.

Can accommodate either tapered (155 x 255 x 600 mm) or rectangular boards (255 x 600 mm).

A special pretension device ensures constant tension of the yarn as winds on the cards and the yarn pitch is selected by a pulley system.

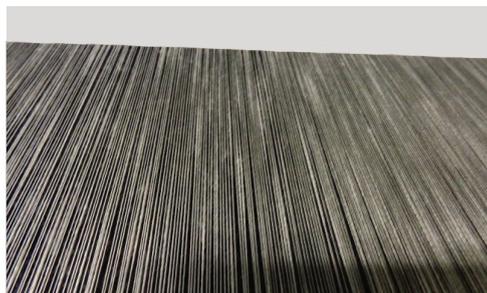


Dimensions: 950mm (W), 360mm (D), 600mm (H)

Power Requirements: 0.1 kW

Conforms to: ASTM D2255

### Key Features

- ✓ Variable Speed, 30-300 rpm
- ✓ Automatic stop
- ✓ Pretension device
- ✓ Bracket to hold bobbins

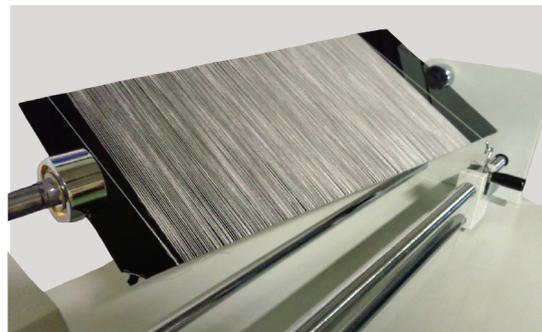

Order Code: BWD:001