


Lockgate-Refleks / Refleks Dimensions

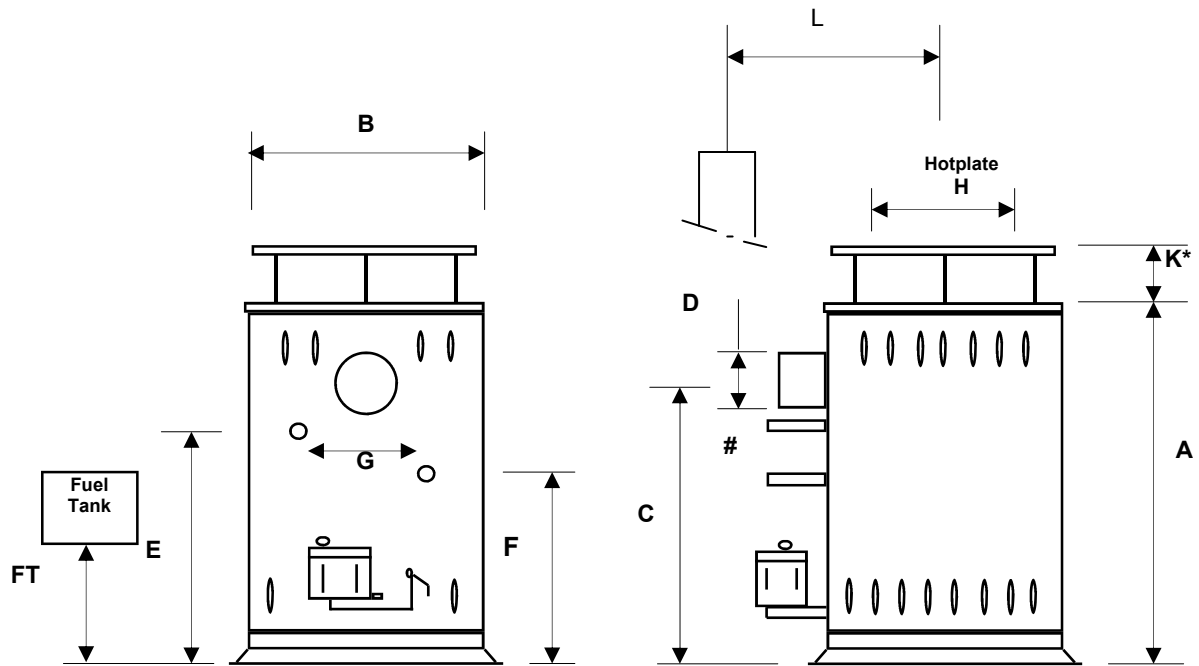

MODEL	A	B	C	D Dia	E	F	G	H Dia	FT Min	K	L
66M	420	165	-	70	-	-	-	-	265	-	-
66MK	420	165	345	70	-	-	-	135	265	30	200
66MS	420	165	-	70	375	245	160	-	265	-	-
66MKS	420	165	345	70	375	245	160	135	265	30	200
2062 / 62M	440	260	345	90	-	-	-	-	265	-	230
2062 / 62MK	440	260	345	90	-	-	-	145	265	65	230
2000KV/MV	520	260	430	90	435*	285*	.*	145	265	65	230
2000K	500	260	410	90	-	-	-	145	265	65	230
62MSK	440	260	345	90	385	265	170	145	265	65	230
60M	535	320	420	90	-	-	-	-	290	-	270
60MK	535	320	420	90	-	-	-	185	290	85	270
61MSK	630	320	525	90	575	345	200	185	290	85	270

Water Coil Connections, 66 – 3/8 BSP & 62/61 - 1/2 BSP Male,
2000KV - 1/2 BSP Female Fiddle Rail fitted on models with “K” code only.

- Note: * 2000KV Back Boiler connection diagram, Page 19
Dimension “L” Centre of Stove to centre of flue.