


Product Data Sheet




Standards:

All tolerances will meet or exceed the standard tolerances for stud and track product as per ASTM standard specifications C955-00a.

Steel Profile:	Steel Grade:	Coating:
ASTM C645	ASTM A1003	ASTM 653

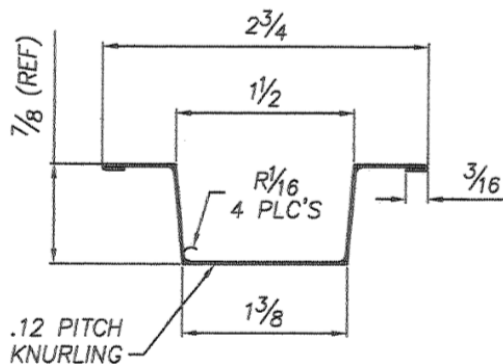

FOR 25 GAUGE ONLY

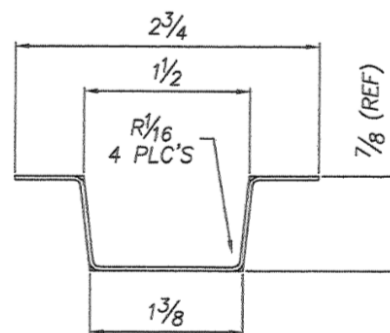

FOR 20 - 22 GAUGE ONLY

TOLERANCES:
LINEAR $\pm 1/16$
ANGULAR $\pm 3^\circ$
MATERIAL: .017-.030-.35 CQ. GALV. STEEL
40 KSI MAX. YIELD STRENGTH.
TWIST $1/4"$ PER 10'
BOW AND CAMBER $1/4"$ MAX PER 10'
TO RUN LEGS UP AS SHOWN.
PROFILE TOLERANCES TO BE MEASURED AT MINIMUM 8" FROM THE END.

Email: marcel@cabotgypsum.com for further assistance

Call 1-866-665-8537

WWW.CABOTGYPSUM.COM

Cabot Manufacturing ULC.

521 Ferdinand Blvd.
Dieppe, New-Brunswick
Canada
E1A 7E9

