

Product Data Sheet




Standards:

All tolerances will meet or exceed the standard tolerances for stud and track product as per ASTM standard specifications C955-00a.


Benefits:

Metal beads are available in multiple lengths to help reduce waste and minimize splicing. The intricate pattern of holes allows mud to penetrate through the bead to the drywall.

Steel Profile:	Steel Grade:	Coating:
ASTM C645	ASTM A1003	ASTM 653

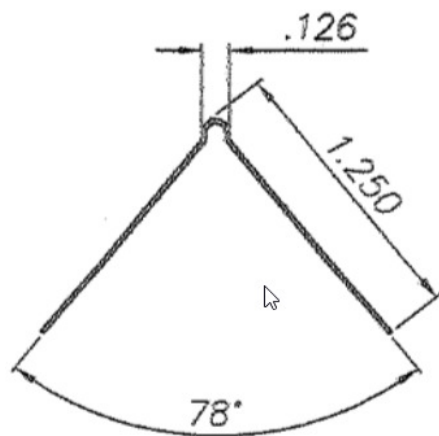

TOLERANCES:
PROFILE $\pm 1/16$
ANGULAR $\pm 3^\circ$
TWIST 3° MAX LAYING LEGS DOWN
BOW 1/32 PER FT
CAMBER 1/32 PER FT

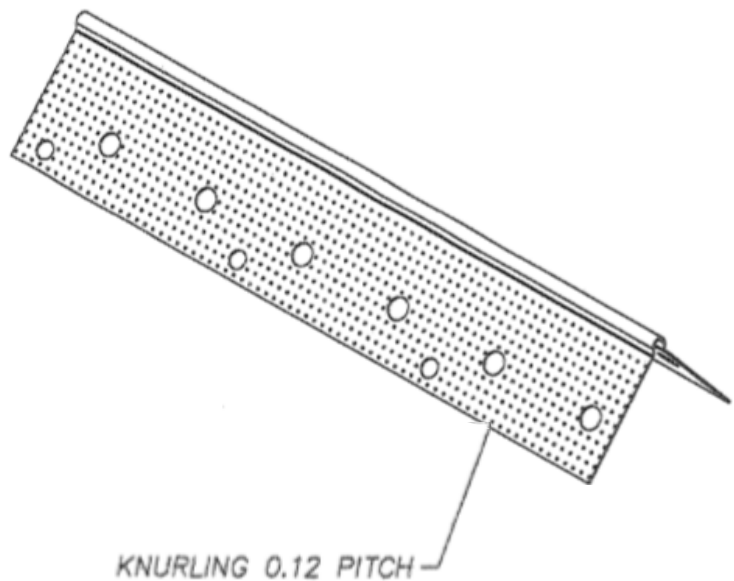

Email: marcel@cabotgypsum.com for further assistance.

Call 1-866-665-8537

WWW.CABOTGYPSUM.COM

Cabot Manufacturing ULC.
521 Ferdinand Blvd.
Dieppe, New-Brunswick
Canada
E1A 7E9

