17.1U Front flow cooling Model FD-URC1U440


17.1 Specification



		-
Product Description	Model No.	FD-URC1U440
	Туре	19 Inch Rack mount top flow cooling
	Size LWH (mm)	482x44x22
	Weight KG	0.5
	Color	Black textured powder coated
	Power Rating	220-240V AC 50Hz
	Power Supply Rating	12V 3Amp
	Power Consumption	24 Watt
Electrical characteristic	Fan Power Rating (Per Fan)	12V 0.5 Amp
Characteristic	No. of Fans	4
	Sensor	No
	Feature	Front Exhaust, Easy plug & Play, On/off Switch
Physical characteristic	Airflow Rate	88CFM
	Noise Level	50 dB
	Fan RPM	15000
	Fan Size	40X20mm
Included Items	Mounting Screw M5	0
	Allen Key 4mm	0
	Cage Nut	0
	Power Adaptor	1
	Back Mounting Clamp	0



17.3 Product Drawings

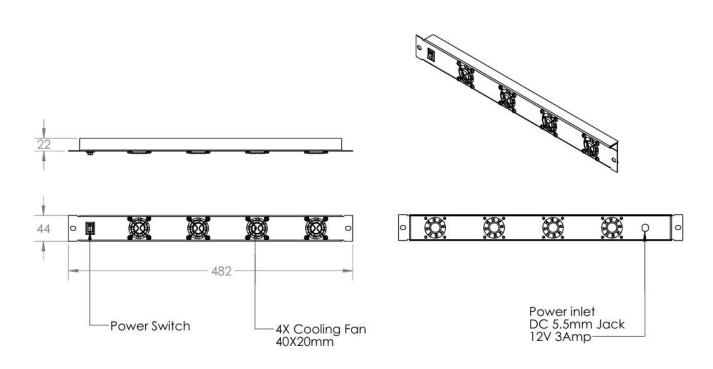

18. 2U Front flow cooling Model FD-URC2U480


18.1 Specification



Product Description	Model No.	FD-URC2U480
	Туре	19 Inch Rack mount top flow cooling
	Size LWH (mm)	482x86x33
	Weight KG	1
	Color	Black textured powder coated
	Power Rating	220-240V AC 50Hz
	Power Supply Rating	12V 3Amp
	Power Consumption	15 Watt
Electrical characteristic	Fan Power Rating (Per Fan)	12V 0.3 Amp
Characteristic	No. of Fans	4
	Sensor	No
	Feature	Front Exhaust, Easy plug & Play, On/off Switch
Physical characteristic	Airflow Rate	120CFM
	Noise Level	30 dB
	Fan RPM	3000
	Fan Size	80X25mm
Included Items	Mounting Screw M5	0
	Allen Key 4mm	0
	Cage Nut	0
	Power Adaptor	1
	Back Mounting Clamp	0



18.3 Product Drawings

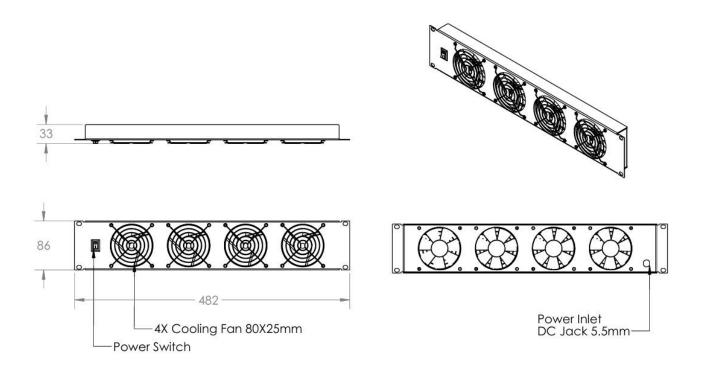


19. 3U Front flow cooling Model FD-URC3U3120


19.1 Specification



	Model No.	ED 11DC3113430
Product Description		FD-URC3U3120
	Туре	19 Inch Rack mount top flow cooling
	Size LWH (mm)	488x134x33
	Weight KG	1
	Color	Black textured powder coated
	Power Rating	220-240V AC 50Hz
	Power Supply Rating	12V 3Amp
	Power Consumption	30 Watt
Electrical characteristic	Fan Power Rating (Per Fan)	12V 0.8 Amp
Characteristic	No. of Fans	3
	Sensor	No
	Feature	Front Exhaust, Easy plug & Play, On/off Switch
Physical characteristic	Airflow Rate	270CFM
	Noise Level	32 dB
	Fan RPM	3000
	Fan Size	120X25mm
Included Items	Mounting Screw M5	0
	Allen Key 4mm	0
	Cage Nut	0
	Power Adaptor	1
	Back Mounting Clamp	0

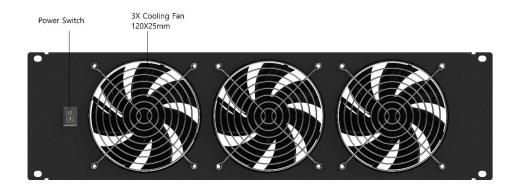

19.3 Product Drawings

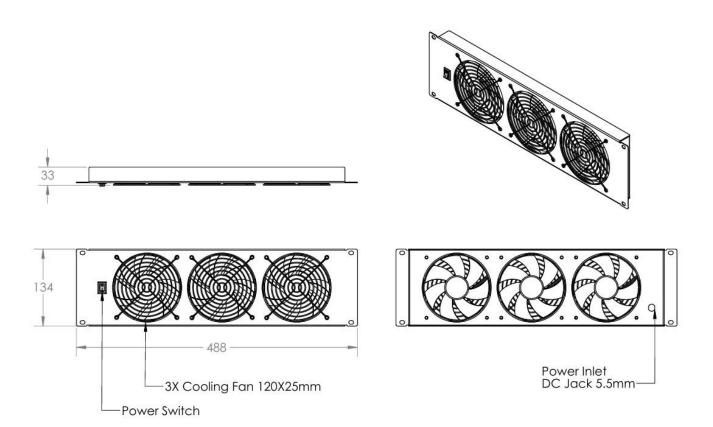

20. 1U Top flow cooling 21 Inch Model FD-URC1U692


20.1 Specification



Product Description	Model No.	FD-URC1U692
	Туре	19 Inch Rack mount top flow cooling
	Size LWH (mm)	488x531x46
	Weight KG	8
	Color	Black textured powder coated
	Power Rating	220-240V AC 50Hz
	Power Supply Rating	12V 10Amp
	Power Consumption	100 Watt
Electrical characteristic	Fan Power Rating (Per Fan)	12V 1.5 Amp
Characteristic	No. of Fans	6
	Sensor	Temperature Sensor (Place sensor on critical heating device)
	Feature	Delay start, Auto start, Auto stop, High Temp Buzzer
Physical characteristic	Airflow Rate	600 CFM
	Noise Level	50 dB
	Fan RPM	4000
	Fan Size	92X38mm
Included Items	Mounting Screw M5	10
	Allen Key 4mm	1
	Cage Nut	10
	Power Cable	1
	Back Mounting Clamp	2



20.3 Product Drawings

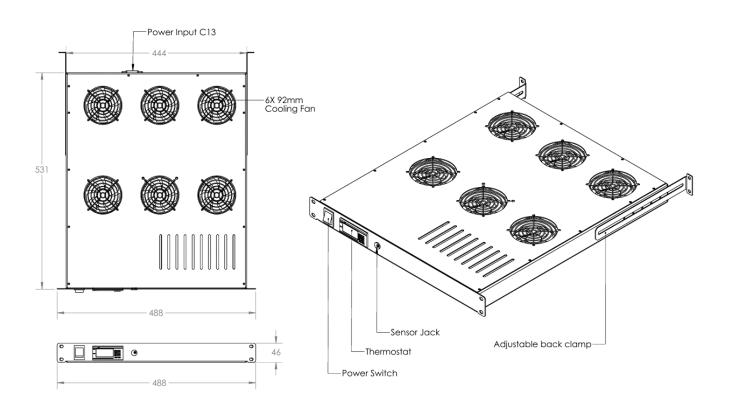


21. 1U Top flow cooling 30 Inch Model FD-URC1U12120

21.1 Specification



Product Description	Model No.	FD-URC1U692
	Туре	19 Inch Rack mount top flow cooling
	Size LWH (mm)	488x746x46
	Weight KG	12
	Color	Black textured powder coated
	Power Rating	220-240V AC 50Hz
	Power Supply Rating	12V 10Amp + 12V 10Amp
	Power Consumption	200 Watt
Electrical characteristic	Fan Power Rating (Per Fan)	12V 1.5 Amp
Characteristic	No. of Fans	12
	Sensor	Temperature Sensor (Place sensor on critical heating device)
	Feature	Delay start, Auto start, Auto stop, High Temp Buzzer
	Airflow Rate	1200 CFM
Physical characteristic	Noise Level	50 dB
	Fan RPM	3000
	Fan Size	92X38mm
Included Items	Mounting Screw M5	10
	Allen Key 4mm	1
	Cage Nut	10
	Power Cable	1
	Back Mounting Clamp	2

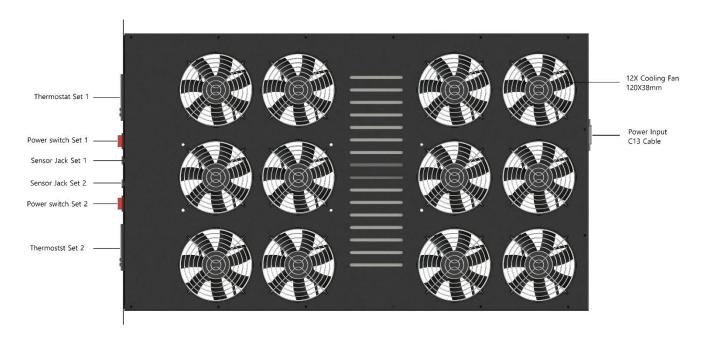

21.3 Product Drawings

