



## STRAIGHT APPLICATION

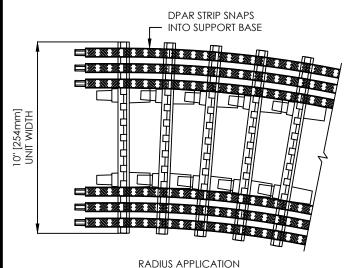

All drawing are saved in a \*.dwg format and are provided as a service to our customers; dimensions supplied by Daldorado are for reference only. Daldorado or any authorized distributor of our products will not be held responsible from files which have been converted and does not warranty the documents against deficiencies or typographical errors of any kind. All measurements of the actual product must be verified before any custom fabrication in the field occurs. COPYRIGHT: This document is the property of Daldorado, LLC and is provided on an in-confidence basis, it may not be copied or reproduced without the permission of Daldorado or its authorized agent.

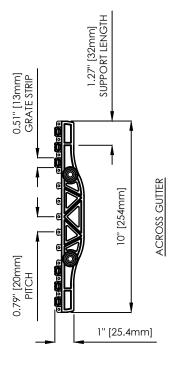

SilentFLOW DPAR: ALL COMPONENTS ARE CORROSION RESISTANT,
NON-CONDUCTIVE, NON-MAGNETIC, AND DO NOT REQUIRE BONDING.
THE DALDORADO PARALLEL RADIUS GRATE IS SUPPLIED IN STRIPS 2-FT IN
LENGTH THAT SNAP INTO THE SUPPORT BASE, TO PROVIDE A MINIMUM
INSIDE RADII OF 6-FT.

GRATE: DALDORADO PARALLEL GRATE IS FORMED OF MOLDED

UV-STABILIZED PVC, CERTIFIED TO NSF/ANSI/CAN 50-2020, SECTION 3

OF ANSI/APSP-16 FOR FINGER AND LIMB ENTRAPMENT, AND ADA

COMPLIANT. SUPPLIED IN 1-FT MODULAR INTERLOCKING SECTIONS. THE

GRATE SURFACE BARS RUN PARALLEL WITH THE POOL EDGE AND

PROVIDE 40% OPEN AREA FOR UNRESTRICTED WATER FLOW. GRATES

CARRY A 10-YEAR MANUFACTURER'S WARRANTY.

ENTRAPMENT: GRATE OPENINGS DO NOT EXCEED 0.315-IN (8MM) AND IN ACCORDANCE WITH SECTION 3 OF ANSI/APSP-16 FOR FINGER AND LIMB ENTRAPMENT.

LOAD: CERTIFIED LOAD CLASSIFICATIONS UNDER STANDARD AS 3996 CLASS, "A" AS OVER 10kN (=2,248 LBS-FORCE) FOR GRATES AND COVERS. TESTED ON A 1.25" LEDGE.

<u>SLIP FACTOR</u>; CERTIFIED TO AS 4586-2013 CLASS "C" (GREATER THAN 24-DEG INCLINE) FOR WET BAREFOOT INCLINING PLATFORM (RAMP) TEST FOR SWIMMING POOL RAMPS AND STAIRS LEADING TO WATER, SWIMMING POOL SURROUNDS AND COMMUNAL SHOWER ROOMS, COMMUNAL CHANGING ROOMS.

CORNERS: CORNERS ARE FABRICATED AND SUPPLIED IN 45-DEG, 90-DEG AND SPECIAL ORDER CORNERS TO PROJECT REQUIREMENTS. WARRANTY IS VOID IF FABRICATED CORNERS ARE NOT USED.

RADII: THE STANDARD PARALLEL RADIUS GRATE PROVIDES A MINIMUM INSIDE RADIUS OF 6-FT. RADII LESS THAN 6-FEET AND GREATER THAN 1-FT ARE CUSTOM FABRICATED TO PROJECT PLANS.

COLOR: GRATE IS PROVIDED IN THREE COLORS - WHITE, BONE, & GRAY.

INSTALLATION: FOLLOW DALDORADO INSTALLATION INSTRUCTIONS. USE DFS-FASTSET-SM FASTENERS PROVIDED (316 SS SMALL CLIP, 316 SS #10x1" SQUARE DRIVE PAN HEAD SCREW, AND GREEN PLASTIC ANCHOR).

PARALLEL RADIUS/STRAIGHT GRATING DPAR-10				
LINEAL METRES				
# 90-DEG CORNERS (OUTSIDE)				
# 90-DEG CORNERS (INSIDE)				
# SPECIAL CORNERS				
SLOPE (IF APPLICABLE)				
GRATING COLOR	WHITE	BONE	GRAY	

Product: 10" Parallel Radius/Straight Grating					
Product #: DPAR-10					
Material:	PVC	Rev Date:	07/20/2022		
Color:	PER TABLE	Rev By:	Daldorado		

## DALDORADO

4327 Arnold Ave, Naples, FL 34104 Phone: 888.509.8128 www.daldorado.com