

A woman with dark hair, wearing a dark bikini, is sitting at the edge of a swimming pool. She is looking out over the water. The pool's edge is tiled with large, light-colored rectangular tiles. The water is a clear, vibrant blue. A dark blue banner with white text is overlaid on the right side of the image.

**DalLUX™**

STONE & TILE SUPPORT SYSTEM  
BY DALDORADO

# Bring your deck to the water's edge

A luxury pool featuring a deck comprised of material, such as stone and tile exudes natural beauty and timeless elegance, and is prized for its strength and durability.

With the Daldorado DalLUX™ Stone and Tile Support System, designers can take their decking to the next level by bringing the deck to the water's edge for superior aesthetics and functionality.



**DalLUX™**  
STONE & TILE SUPPORT SYSTEM  
BY DALDORADO




# FEATURES

## Stone or Tile\*

High load capacity to minimize deflection of stone or tile (+- 5,000 lbs/2,268kg)


Water drop-in openings (notches) ensure the 8mm (0.31") gap to meet IBC Child Finger/Toe Entrapment Guidelines.

Load capacity suitable for normal pedestrian traffic

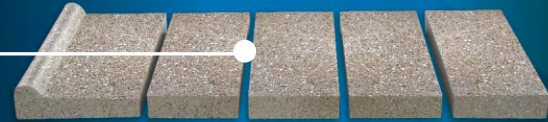

## Adhesive/Sealant (Supplied)


Beads of special adhesive/sealant (supplied) are applied to individual grate supports by a professional stone/tile installer. Use traditional thinset or mastic for the deck as instructed by stone/tile manufacturers.

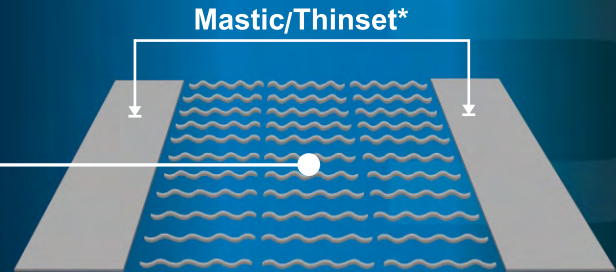

## DalLUX™ Support Grate

Two-inch (2") wide supports and custom miter corners are engineered for high-load capacity. DalLUX™ support grates are available in two water drop-in options —

- 4 openings (3 parallel sections of tile or stone)
- 5 openings (4 parallel sections of tile or stone)

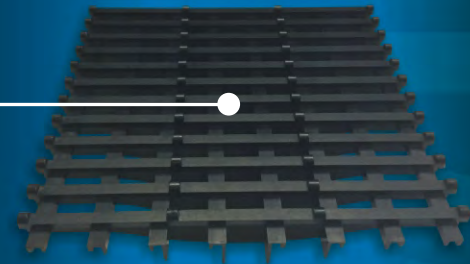

## Gutter/Deck\*

For straight perimeter pool gutters (new construction or retrofit)

Note: A slight slope of up to .5 inches (12.5mm) or 2 degrees over the span of 12 inches (304mm) helps to minimize any wash over to the deck.



\*Stone, Tile, Mastic/Thinset & Gutter Not Included  
Contact Daldorado for custom stone supply.



4-slot DalLUX™ support grate shown

## General Information

- DalLUX™ is not suitable for pools with high levels of water overflow, such as competition or high-use public pools.
- The pool consultant or customer is responsible for ensuring that the tile or stone is specified, are cut or made, and bonded according to the Installation Instructions.
- Stone and tile must be installed by a company that specializes in laying stone and/or tile.
- Swimming pool design professional is the final authority in determining a four- or five-slot opening to satisfy water capture design flow.
- Stone and tile must comply with Country and local codes for slip resistance qualities.



**FOR PRODUCT SAMPLES**

**1 888 509 8128**

**[daldorado.com](http://daldorado.com)**

4327 Arnold Ave, Naples, FL 34104

Pool images shown are renderings and not actual product installation.  
© 2018 Daldorado, LLC. All rights reserved.