

# Blue/Black™ Safety Covers

## Custom Cover Ordering Instructions

### Step 1

Sketch the inside dimensions of the pool (see example) on the grid given on the next page. Include all details within four (4) feet of the waterline, i.e. coping (width), rocks, grab rails, waterfalls, spas, ladders, raised walls, uneven decks, planters, etc.

### Step 2


Make a chalk mark (number each mark) at roughly 30 inch intervals around the pool. Be certain to number all corners, diving boards, rail locations, fill spouts, or other obstructions, if they are not removable. Mark areas at one (1) foot intervals when tight radius, steps, rocks, raised walls, waterfalls, or similar obstructions are encountered.

### Step 3

Establish two points, A and B (see example), roughly four (4) feet from the waterline at the closest point. Use a board and drive two (2) nails, 12', 14', or 16' apart. Hook a flexible measuring tape to each nail and measure the A and B distance to each numbered point. Be sure to indicate distance between A and B, and make certain imaginary line between A and B never crosses the water's edge.

### Step 4

Pick two (2) number points representing the overall length of the pool at the waterline. List this measurement (see example). Do the same for the overall width of the pool.

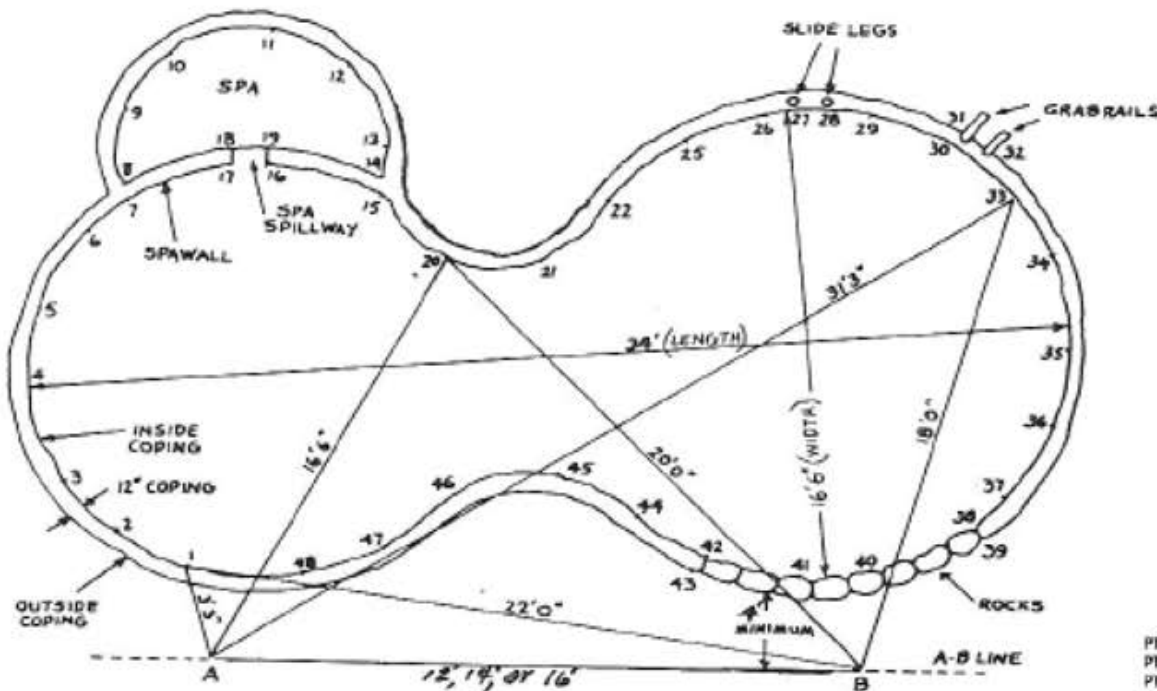

No.	A	B
1	3' 3"	22'
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20	16' 6"	20'
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		

PT. 7-15 SPA WALL  
 PT. 16-19 SPILLWAY  
 PT. 20-24 PLANTER  
 PT. 27&28 SLIDE LEGS  
 PT. 31&32 GRABRAILS