


TCI Smart

TCIS.ICP


One Stop Digital Solutions

16GB RAM & 256GB Storage

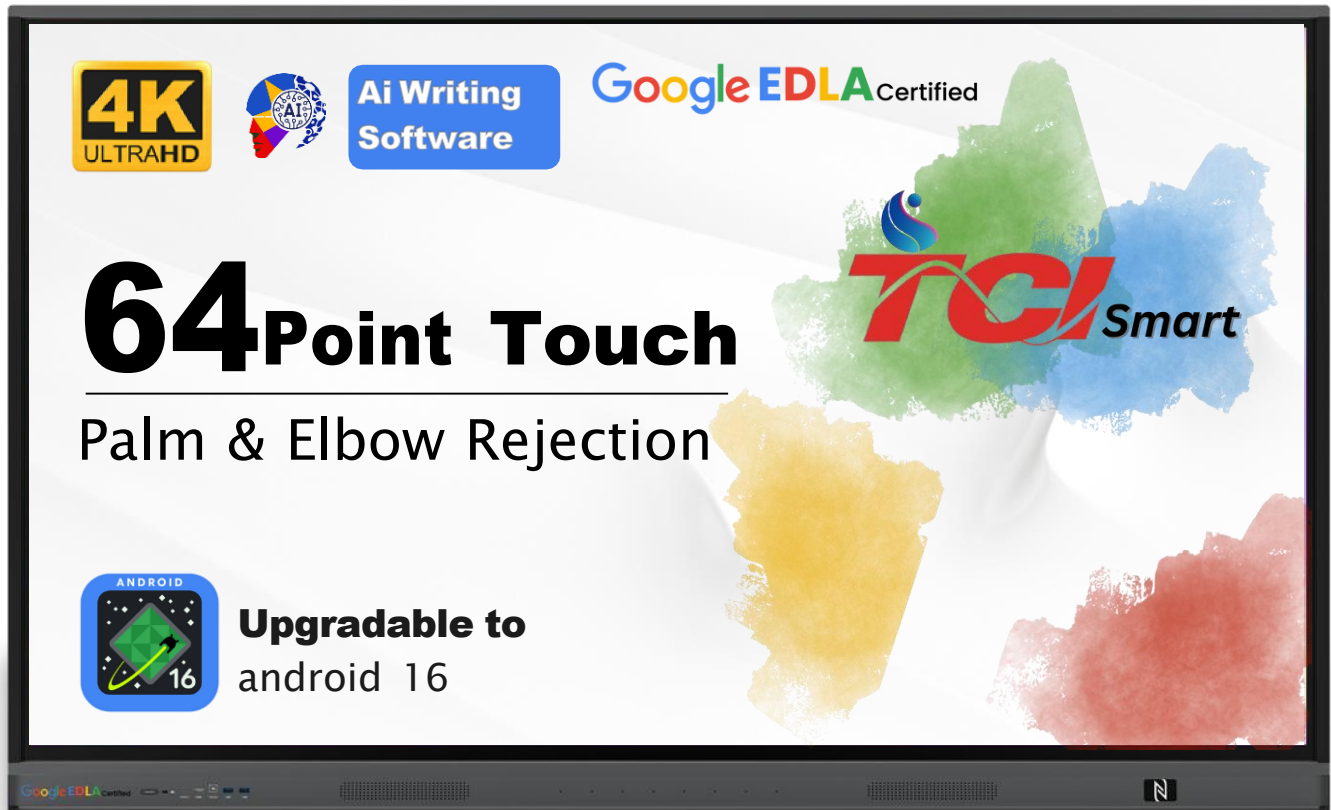


TCI Smart Interactive Flat Panels

Available in All Sizes: 65", 75", 86", 98", 105"

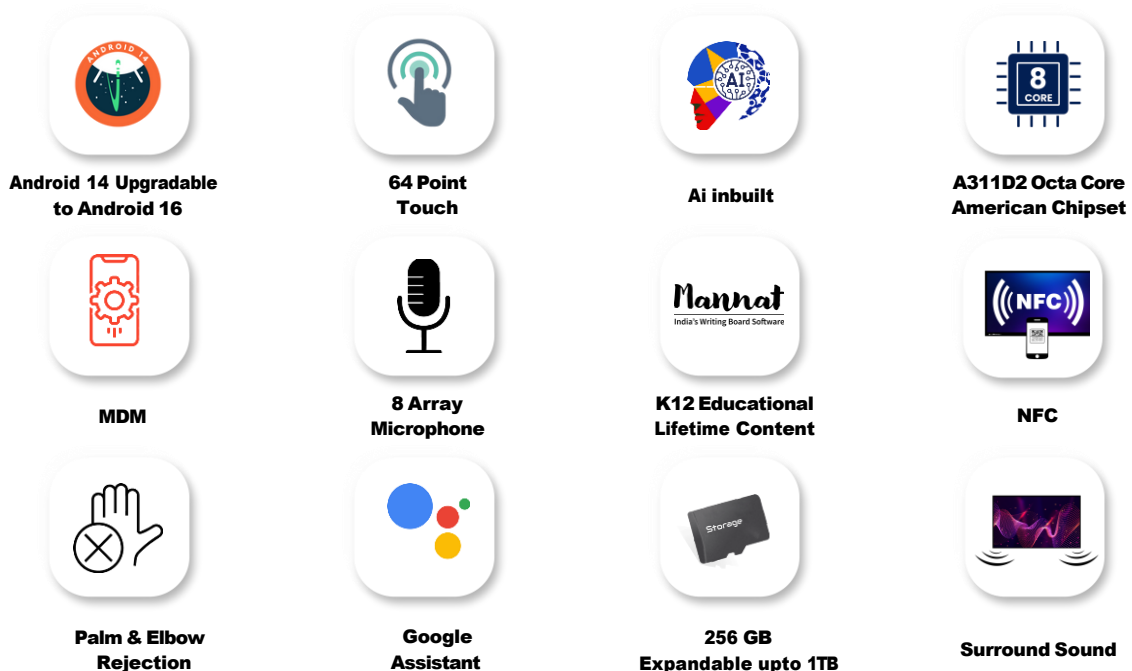

TCI Smart

Google - TCIS.ICP

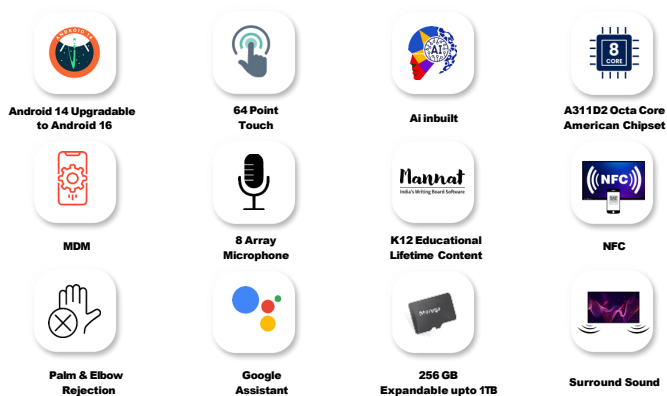

Specifications



Panel	SIZE	RESPOND TIME	VISUAL RATIO	PANEL TYPE	DISPLAY COLOURS
	65"/75"/86"/98"	<2.0ms	16:09	LCD/LED	1.07G(8BITS+FRC)
	FREQUENCY	MAX VISUAL AREA	RESOLUTION	PIXEL PITCH	COLOUR SATURABILITY
	60 Hz	1649.66(H)x927.93(V)mm	3840x2160		70% NTSC
	BRIGHTNESS	LIFE SPAN	CONTRAS RATIO	LIGHT SOURCE	VIEW ANGLE
	400cd/m2 (±10%)	≥50,000 Hr.	1200:01:00	DLED	LCD/LED
MICROPHONE & NFC	FRONT BUILD IN	-		NFC	
	8 ARRAY MICROPHONE AND 10mtr PICKUP DISTANCE	-		SCREEN SHARING AND DATA TRANSFER	
AUDIO/VIDEO PARAMETERS	SPEKERS		SOUND TRACK	POWER	SUBWOOFER
			2.1 CHANNEL	15x2 WATT	20 WATT
TOUCH PARAMETERS	TOUCH SPECIFICATIONS	SUPPPORT SYSTEM		OUTPUT CO-ORDINATES	
	NON-CONTACT INFRARED SENSING TECHNOLOGY	WINDOWS 10/WINDOWS 8/WINDOWS 11/ANDROID/LINUX/MAC OS X/CHROME		32767(W) x 32767(D)	
	TOUCH POINTS	Min. IDENTIFIER	WRITING DISPLAY		WRITING HEIGHT
	64	2mm	SINGLE STYUS PEN 2 COLOUR		MAX 400W
	RESPOND TIME	TOUCH DEPTH	INPUT MODE		
	<2.0ms	+ 1mm(OVER 90% AERA)	OPAQUE OBJECT(FINGURE,PEN etc)		
SYSTEM	VERSION	CPU	GPU Mail-G52MP8	RAM	ROM
	ANDROID 14.0	A73*4+A53*4	(8EE)	16GB	256GB
WIRELESS	BLUETOOTH	VERSION	WORKING FREQUENCY	WORKING DISTANCE	REMARK VIA
		5	2.4/5Ghz	10mtr	
	WIFI	VERSION	WORKING FREQUENCY	WORKING DISTANCE	REMARK VIA
		6	2.4/5Ghz	10mtr	
REAR I/O INTERFACE	MIC IN	USB 2.0	USB 3.0	HDMI IN	USB TOUCH OUT
	1	1	1	2	1
	HDMI OUT	OPTICAL OUT	LAN RJ 45 IN	LINE OUT	RS232
	1	1	1	1	1
	TF CARD				
	1				
FRONT INTERFACE	USB 3.0	TOUCH USB	HDMI IN	TYPE C	
	1	1	1	1	
POWER	VOLTAGE	MAX.POWER CONSUMPTION		STAND BY POWER CONSUMPTION	
	100-240 AC 50/60Hz	280W		≤0.5W	
STRUCTURE	BARE DIMENSION	PACKING DIMENSION	MACHINE + WALL MOUNT THICKNESS		VESA HOLE SITE
	1707 x 91.8 x1022.7mm	1873 x 270 x 1197mm	118mm(WIB9060G)		800 x 400mm
	NET WEIGHT	GROSS WEIGHT	WALL MOUNTING SCREW SPECIFICATION		
	61.8KG	81.3KG	M8 x 25mm		
ENVIRONMENT	WORKING TEMPERATURE	WORKING HUMIDITY	STORAGE TEMPERATURE	STORAGE HUMIDITY	WORKING ELEVATION
	0°C~40°	10%~90%RH	-20°C~60°C	10%~90%RH	<5000m