

Wood doors on your terms

90 MIN P-LAM DOOR CONSTRUCTION SPECS

Denton Door 5-Ply Premium Flush Door Construction:

All Denton Door Company Premium Architectural Doors Type PC-5/FD-3 meet or exceed standards set forth by WDMA I.S.1-A and the AWI for PC-5 as tested per A.S.T.M. E-152 by Warnock Hersey International. DentonDoor is authorized through INTERTEK to construct and mark 90-minute rated fire doors.


Top and Bottom Rails:
2" Thick Firestop, top and bottom.
Top rail and bottom rail can be specified to meet specialized hardware requirements

Core Type:
Incombustible, non-asbestos,
engineered, mineral core

Crossband:
1/10" High Density Fiber Crossband

Stiles:
1" Firestop laminated to 1/2" (before
trim) wood for stained edges.
Stiles and special blocking can be
specified to meet specialized
hardware requirements.

Faces:
Plastic Laminate available from:
Wilsonart, Formica, Nevamar, Arborite

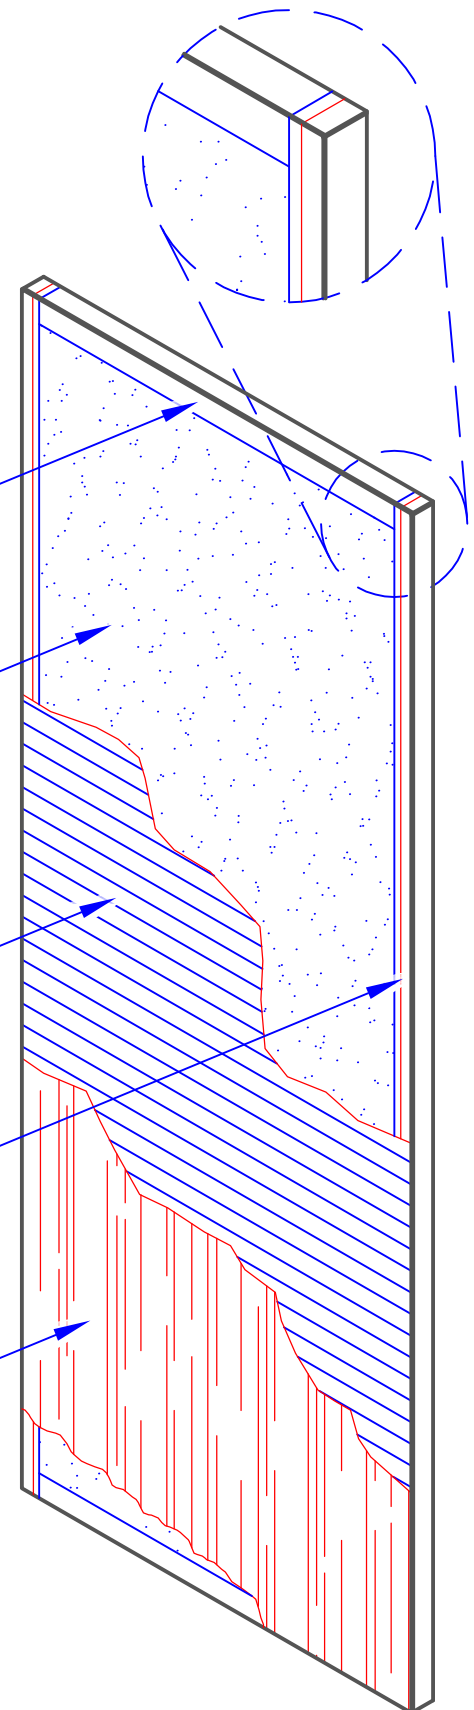

Adhesives: Meet requirements of WDMA
I.S.1A, C-6

Door Thickness: 1-3/4"

Maximum Size: 4' x 9'

Warranty: Premium Architectural Doors (Lifetime Warranty)
Note: Interior use only. (Exterior use applications not warranted.)