



Probe Sonicator with Remote PRO660R

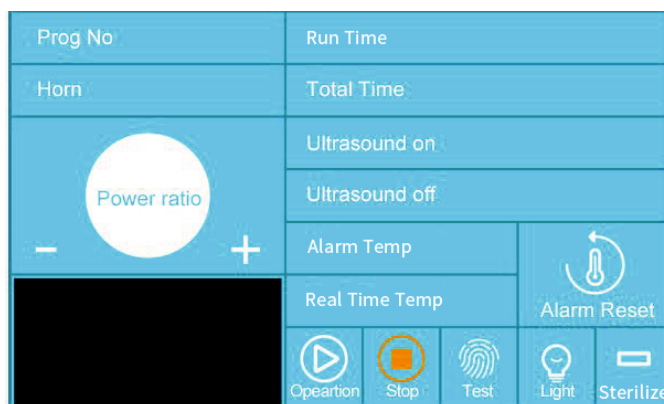
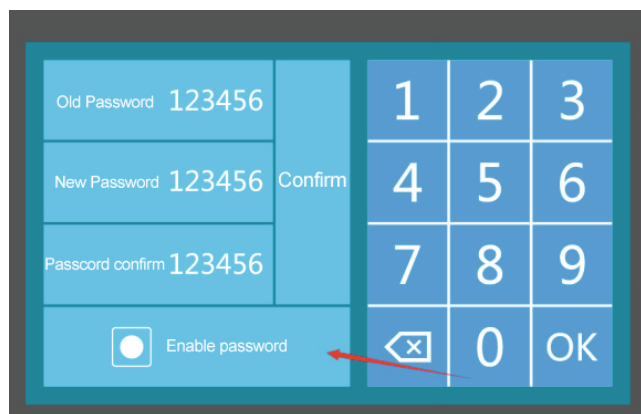


Touch Screen Probe Sonicator With Sound Proof Enclosure with Remote Control PRO660R



SALIENT FEATURES

- Microprocessor controlled and completely programmable.
- Compact Design, soundproof enclosure can Fix on Ultrasonic Generator
- Built-in LED Light in Sound Proof Enclosure with ON/OFF Function.
- Soundproof enclosure with Ultraviolet Sterilization function.
- Circulating Glass Beaker to rotate the sample. - Standard Supply
- 7" TFT Touchscreen display.
- Output amplitude 0-100% adjustable.
- User Password Protection available, Auto frequency tracking
- Sample Stand can move up & down by Remote Control
- Overtemperature, overload & time alarm functions,.



PROBE

Probes (mm)	Φ2	Φ3	Standard Probe ★ Φ6	Φ8	Φ10	Φ12
PRO660R - Process capacity	0.2-5ml	3-10ml	10-100ml	20-200ml	30-300ml	50-500ml
Power ratio (1-100%)	1-35%	1-45%	1-70%	1-80%	1-90%	10-90%

Please use Probe Sonicator with stabilizer for better results & long life

Probe Sonicator (Touch Screen with Remote)

HSN Code : 84798200

SPECIFICATIONS

Model	PRO660R
Make	LABMAN
Frequency	20-25KHz
Power	6.5-650W adjustable
Crushing & Mixing capacity	0.2-500 ml
Standard Probe	Φ6 mm (for 10~100ml sample)
Optional Probes	Φ2, Φ3, Φ6, Φ8, Φ10, Φ12 mm
Probe Material	Titanium alloy
Display type	Touchscreen
Display Size	7 inches
Temperature Range	Ambient to 100°C
Single ultrasound time	0.1-99.9 S
Data storage	20 sets
Ultraviolet Sterilization Function	Yes
LED Light on Enclosure	Yes
Remote Control	Yes
Waveform display	Yes
Voice alarm fault alarm	Yes
Password Protection	Yes
Display Content	Temperature, Power, Time, Graph
Alarm system	Time alarm , overload alarm ,no-load alarm ,over-temperature alarm
Ultrasonic Cabinet material	Aluminium alloy+ABS
Soundproof box material	Anti Corrosive +ABS
Soundproof Enclosure	yes
Soundproof Enclosure size (L x W x H)	515 x 320 x 320 mm
Soundproof Enclosure Weight	13kg
Power supply	AC 220V,50/60Hz
Packing Dimension (L x W x H)	520 x 430 x 360mm
Gross Weight	19kg

Optional Probe : 2mm, 3mm, 6mm 8mm, 10mm, 12mm

★ Specifications are subject to change without notice.


STANDARD ACCESSORIES

Main Instrument, Transducer with 6mm Probe, Temperature Probe, Power cable, Soundproof Box set ,5A Fuse, Lamp Control Cable, Transducer Connecting Cable, RF Remote, Beaker Stand Pad Circulating Glass Beaker , Instruction Manual, Test Certificate


LABMAN Product Range 2025-26

LMFD61, 62, 63, 64 Lyophilizer Freeze Dryer (-60°C)	LMFD83, 84 Lyophilizer Freeze Dryer (-80°C)	LMRE25 Rotary Evaporator	ADM3 Automatic Density Meter	MSOD6 Microvolume Spectrophotometer
NAE32 Nucleic Acid Extractor	EMR4 Elisa Microplate Reader	GPTC96 Gradient PCR Thermal Cycler	HO30 Hybridization Oven	UVCL254 UV - Crosslinker
TGH12, 24 Tissue Grinder Homogenizer	PBH80T Paddle Blender Homogenizer	TOC2NDir Total Organic Carbon Analyzer	TOC1CD Total Organic Carbon Analyzer	LMDS600, 1200 Microwave Digestion System
HPLC1IS, HPLC2GS High Performance Liquid Chromatography	APT1800 Automatic Potential Titrator	KFT250VC Karl Fischer Titrator	COD1500 COD Analyzer with Digestor	BOD4000 BOD Analyzer
MTVM50 Multi Tube Vortex Mixer	LMVM60D Vortex Mixer	OS20 Orbital Shaker	TRM6 Tube Roller Mixer	DBNE12, 24 Dry Bath Nitrogen Evaporator





LABMAN Product Range 2025-26

DBI11T  Dry Bath Incubator	DBI15SH, DBI16SC  Dry Bath Incubator	IRS14, 35  Infrared Sterilizer	GGA200  Air Generator	GGA301, 302  Hydrogen Generator
GGN303  Nitrogen Generator	GHA304  Hydrogen Air Generator(2 in 1)	LMVP10  Vacuum Pump	LMVP20  Vacuum Pump	LMCO1  Column Oven
LMIO6  Mini Thermostatic Incubator	GHP400  Graphite Hotplate	LOBMS5  Oil Bath Magnetic Stirrer	LMMS4LC, 20LC  Ceramic Hotplate Magnetic Stirrer	LMMS300  Hotplate Magnetic Stirrer
MMS15S  Multiposition Magnetic Stirrer	MMS12H  Multiposition Magnetic Stirrer	WBMS3  Water Bath Magnetic Stirrer	LMWB2H, 4H, 6H, 8H  Digital Water Bath	HOS20L  Overhead Stirrer
LMHH160  Hand Held Homogenizer	PS1565  Peltier / Sipper System	LUV6HG  PMT Spectrophotometer	LUV2000T, 2100T  Single / Double Beam UV-Vis. Spectrophotometer with 21CFR	LMSPUV SERIES  Double Beam UV-Vis. Spectrophotometer

LABMAN Product Range 2025-26

LMSPUV1200  UV-Vis. Single Beam Spectrophotometer	LMSPV320, 325  Visible Spectrophotometer	ADP100CFR, 95CFR  Automatic Digital Polarimeter with CFR	ADP45, 50  Automatic Digital Polarimeter (±45°)	ADP75, 90  Automatic Digital Polarimeter (±90°)
ADP40  Automatic Digital Polarimeter	LMPM180  Manual Polarimeter	MAR100  Manual ABBE Refractometer	RFM100CFR  Digital Refractometer CFR	RFM950, 970  Digital Refractometer
LMAR1317T  ABBE Refractometer	LMDV300H  Digital Viscometer with Thermosel	LMDV60, 100, 200  Digital Viscometer (L Series)	LMDV400R  Digital Viscometer (R Series)	LMKV2  Krebs Viscometer
LMDV111, 222  Digital Viscometer with SSA	LVA30  Low Viscosity Adaptor	LMCR80F  Visual Colorimeter	LMUC2D  Ultrasonic Cleaner	LMUC3D, 6D, 9D, 12D, 25D  Ultrasonic Cleaner - Degas
LMUC50, 100  Industrial Ultrasonic Cleaner	LMPH15  pH Meter with Printer	LMPH12, LMPH10H  pH Meter	LMPH9  pH Meter - Basic	LMCM20H  Conductivity / TDS Meter

LABMAN Product Range 2025-26

LMCM20H  Conductivity / TDS Meter	LMMP30, 32  Multiparameter (7 in 1 / 9 in 1)	LMION40  Ion Meter	LMDO50  Dissolved Oxygen Meter	LMHD60  Water Hardness Meter
OPH11  Online pH Controller	OCM21  Online Conductivity Controller	LMTB200  Turbidity Meter	RCB1010T, 1020T, 1030T  Refrigerated Circulating Bath	RCB620T  Refrigerated Circulating Bath
RWC320  Recirculating Water Chiller	LMDO4P  Portable DO Meter	LMPH1P  Portable pH / ORP Meter	LMCM2P  Portable Conductivity / TDS Meter	LMTB5P  Portable Turbidity Meter
PRO656, 900, 1200, 1800  Probe Sonicator	PRO660R  Probe Sonicator with Remote	PRO650  Probe Sonicator	LMIF30T, 50T, 100T  Ice Flaker	LMIF200T  Ice Flaker
LMIM15  Ice Maker	LMIM20C  Ice Maker with Crusher	ISE19, 62  Nitrate / Fluoride ISEs	ER SERIES  pH Electrode / DO Electrode	CC1, CC2, CC3  Conductivity Cell