

FENDER SUSPENDER

BY




FENDER SUSPENDER INSTALLATION INSTRUCTIONS

Step 1.

Position "part A" of the Fender Suspender on the dock to your liking. Drill the two screws with washers into the grommet holes.


Step 2.

Using your fender, measure the distance between the location of "Part A" and "Part B" on the dock. (Part B has the FENDERHOLSTER.com logo). The fender should fit between the two parts. Position "Part B" on the dock with the logo towards you and letters upright. Drill the two screws with washers into the grommet holes.

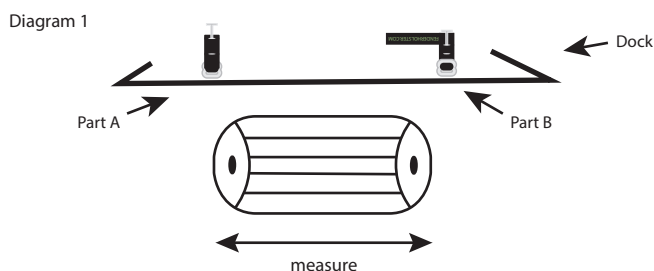

Step 3.

Feed strap through fender.

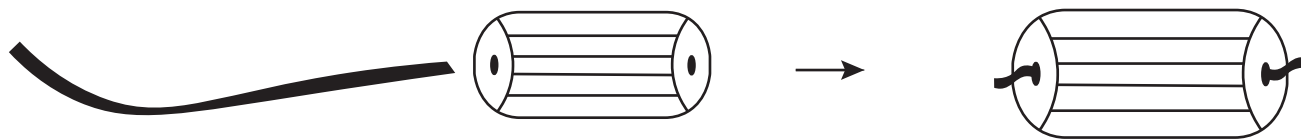

Step 4.

Feed strap through 3 Bar (see video on website under installation) to "Part A" and "Part B" (diagram 1) and adjust straps to your liking. All done!

