
FIVE EASY STEPS

INSTALL YOUR EZIFLOW BY OZIFLOW



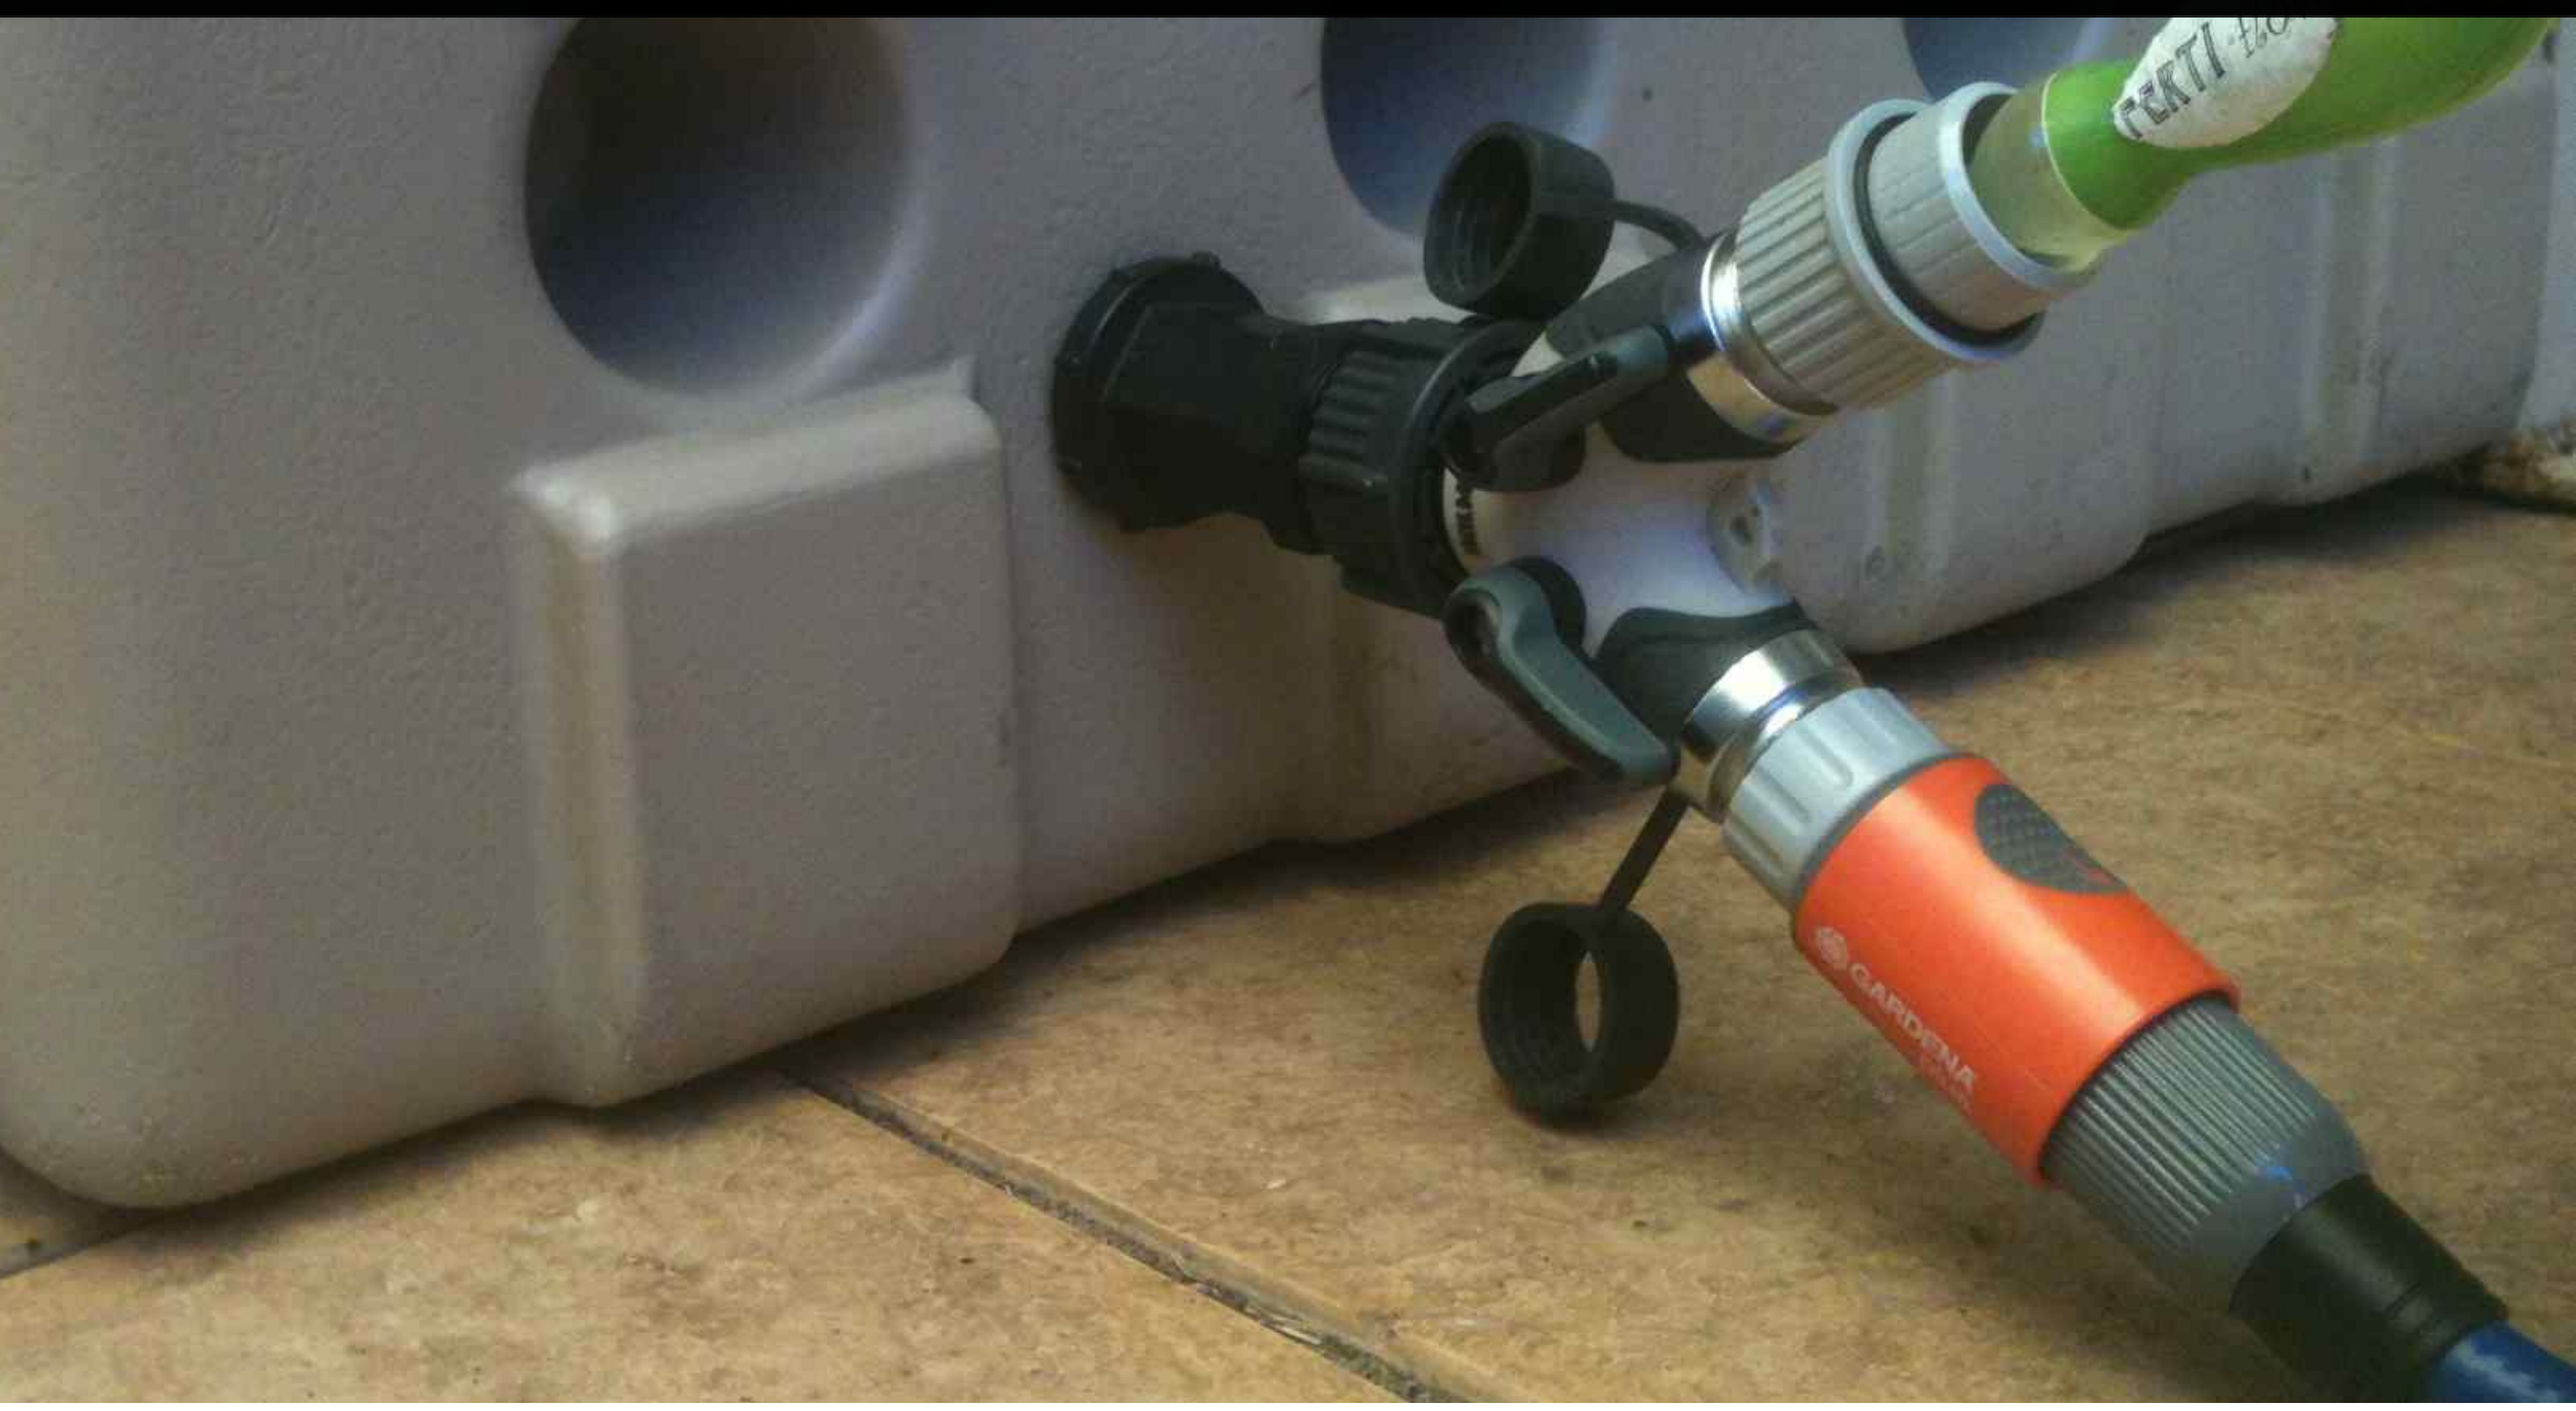

INTRODUCTION

This is a guide to teach you about the 5 steps to convert almost any watertight container into a convenient, watering system and make your home more eco-efficient.

AND HOW TO SUCCEED AT IT

The team who brought you Oziflow, the world's most versatile rain harvesting system, now delivers the world's only external-fit, tap assembly; the Eziflow Watering Solution.

Simply by drilling a 20 mm hole in the surface of any suitable container, pressing in the Eziflow assembly, and following these simple instructions to connect a tap or hose and start watering in almost any location.

WWW. Oziflow .GLOBAL

TABLE OF CONTENTS

STEP 01 DRILLING DOWN

STEP 02 INSERT EZIFLOW FITTING

STEP 03 HEX MARKS THE SPOT

STEP 04 TIGHTEN THE HOUSING

STEP 05 FITTING THE FAUCET




WWW. Oziflow .GLOBAL

STEP 01: DRILLING DOWN

WWW.oziflow.GLOBAL

How you do anything, is how you do everything

Using a cordless drill and a 22 mm/ 7/8” Hole Saw, drill a hole to suit the desired location

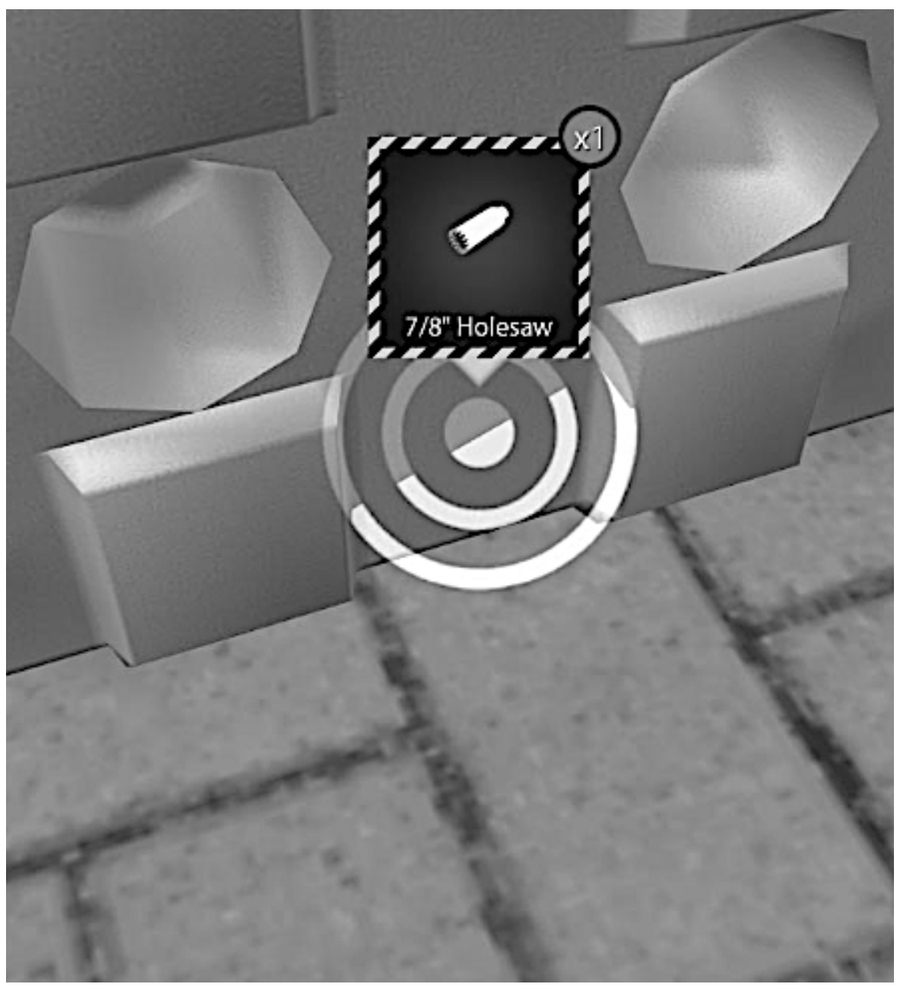

PRO TIP


Do not drill hole on a seam or near edges

STEP 02: INSERT EZIFLOW FITTING

WWW.OZIFLOW.GLOBAL

Press stainless tube into barbed spigot as shown. Place O-rings in grooves and screw spigot 2-3 turns into housing. Insert barbed end into hole, ensuring O-rings remain located in grooves



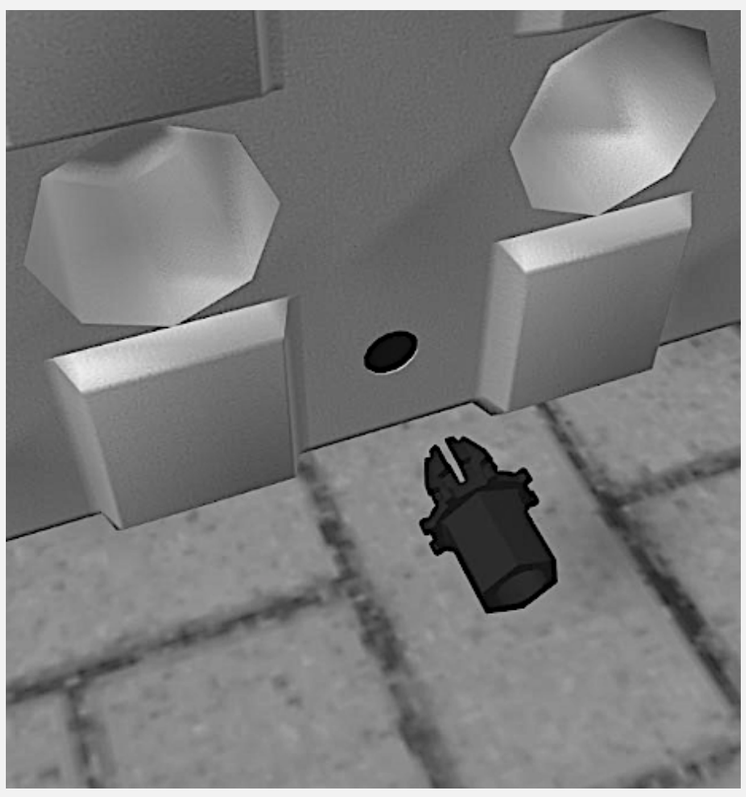

PRO TIP

Ensure the stainless tube has gripped inside the spigot but do not push all the way into the barbed section

It always seems impossible until it's done.
Nelson Mandela

STEP 03: HEX MARKS THE SPOT

WWW. Oziflow .GLOBAL

Insert end number 2 of Spindle Spanner into Housing and push stainless tube until spanner end is located in hexagon socket



PRO TIP

Ensure the Number 2 end remains fixed in the internal socket in preparation for the next step


Have patience. All things are difficult before they become easy.
Saadi

STEP 04: TIGHTEN THE HOUSING

WWW. Oziflow .GLOBAL


We don't stop playing because we grow old; we grow old because we stop playing.
George Bernard Shaw

Ensuring O-rings continue to remain in grooves, grip exposed tool with pliers and tighten Eziflow housing with a wrench, before removing the spanner tool from the internal socket

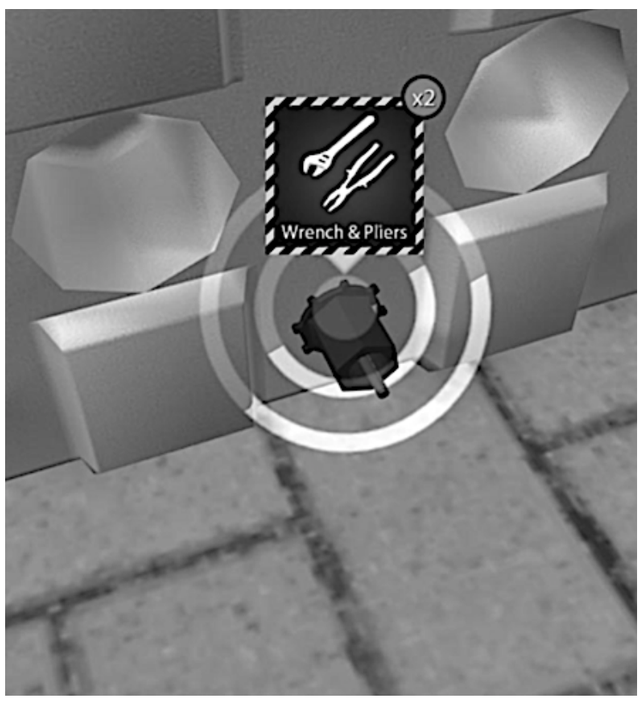

PRO TIP


BE CAREFUL TO NOT OVERTIGHTEN THE EZIFLOW HOUSING. THIS MAY CAUSE THE THREAD TO THREAD TO STRIP, RESULTING IN WATER SEEPAGE

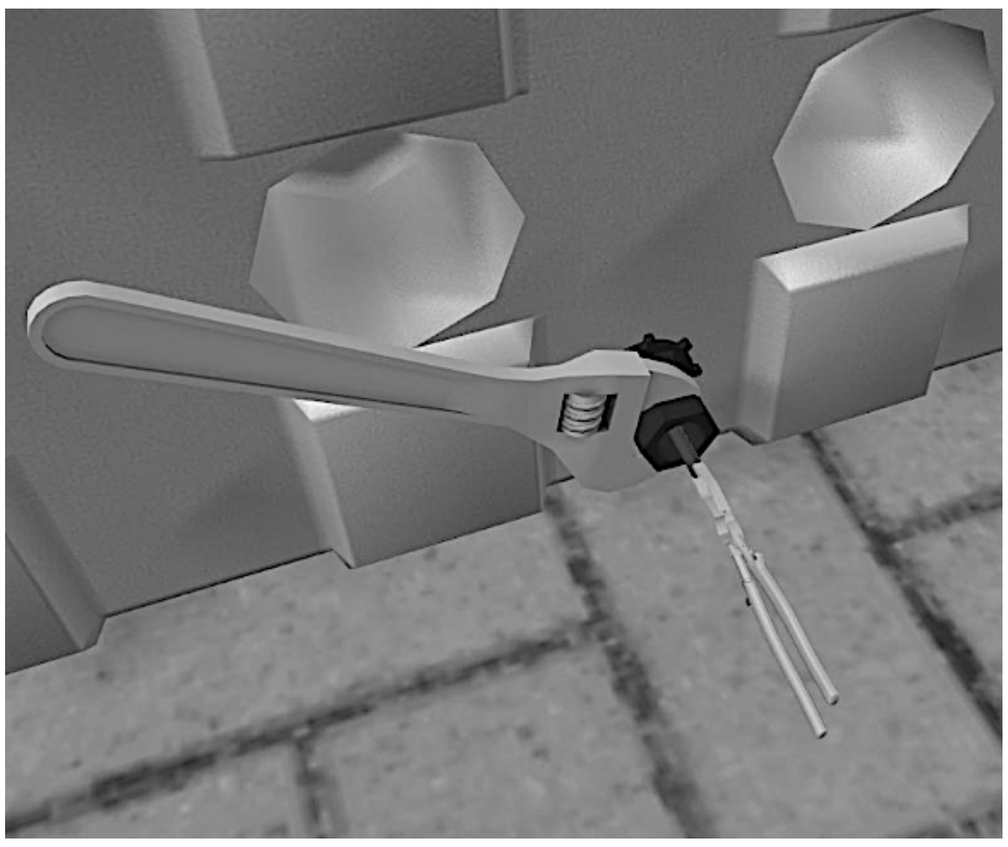

STEP 05: FITTING THE FAUCET

WWW. OziFlow .GLOBAL

Hold the Housing while attaching faucet. When tight, locate to desired position by rotating clockwise

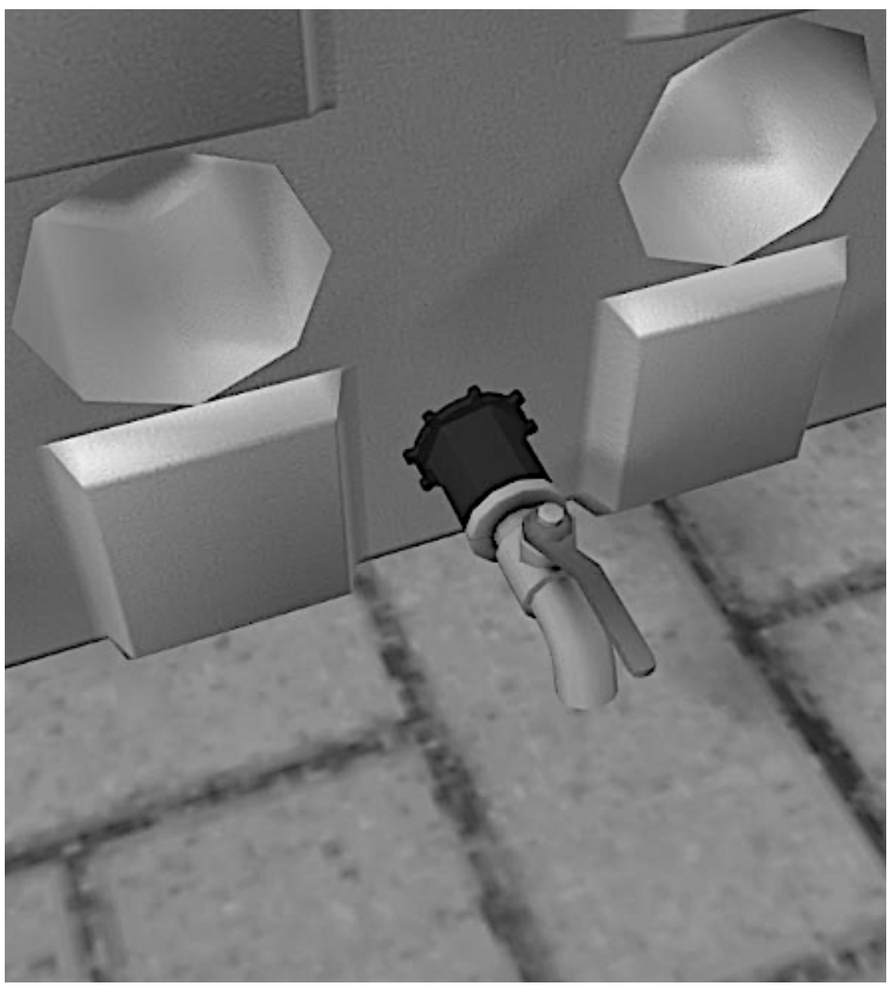

PRO TIP

UPON COMPLETION, DO NOT DISCARD THE SPANNER TOOL. FEEL FREE TO USE THE NUMBER "3" ON YOUR FAVOURITE BEVERAGE AS A REWARD FOR A JOB WELL DONE

Being grateful attracts more things to be grateful for

FOR EZIFLOW PRODUCT INFORMATION OR
STOCKISTS, HEAD TO
WWW.OZIFLOW.GLOBAL
OR

CONTACT US

ONE WORLD TRADE CENTER
SUITE 8500, NEW YORK CITY
NEW YORK, 10007 UNITED STATES
CUSTOMER LOVING
OFFICE: +1 212 220 6545
EMAIL: INFO@OZIFLOW.GLOBAL

