

FIVE EASY STEPS

# INSTALL YOUR EZIFLOW BY OZIFLOW



# INTRODUCTION

This is a guide to teach you about the 5 steps to install your Eziflow, or convert almost any watertight container into a convenient, watering system and make your home more eco-efficient.



## AND HOW TO SUCCEED AT IT

The team who brought you Oziflow, the world's most versatile rain harvesting system, now delivers the world's only external-fit, tap assembly; the Eziflow Watering Solution.


Simply by drilling a 7/8" hole in the surface of your Oziflow Super-slim Rain Harvesting Tank, pressing in the Eziflow assembly, and following these simple instructions to connect a tap or hose and start watering in almost any location.

# TABLE OF CONTENTS

Before you begin, you will need the following items

STEP 01

DRILLING DOWN

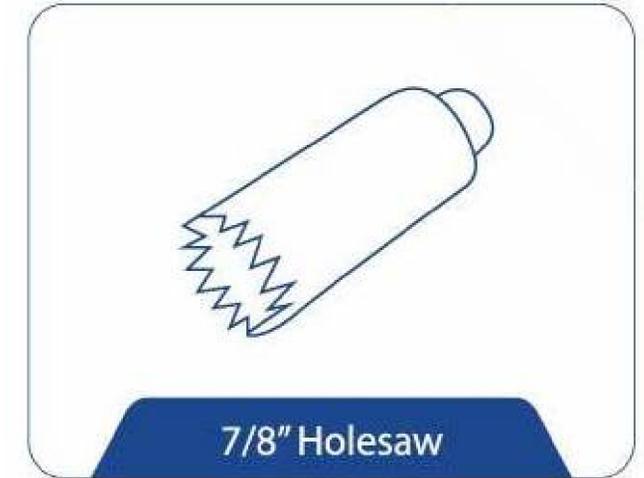

STEP 02

INSERT EZIFLOW  
FITTING

STEP 03

HEX MARKS THE  
SPOT



STEP 04

TIGHTEN THE  
HOUSING


STEP 05

FITTING THE FAUCET



Using a cordless drill and a 7/8" Hole Saw or Spade-blade, drill a hole to suit the desired location

The only limit is the one you set for yourself

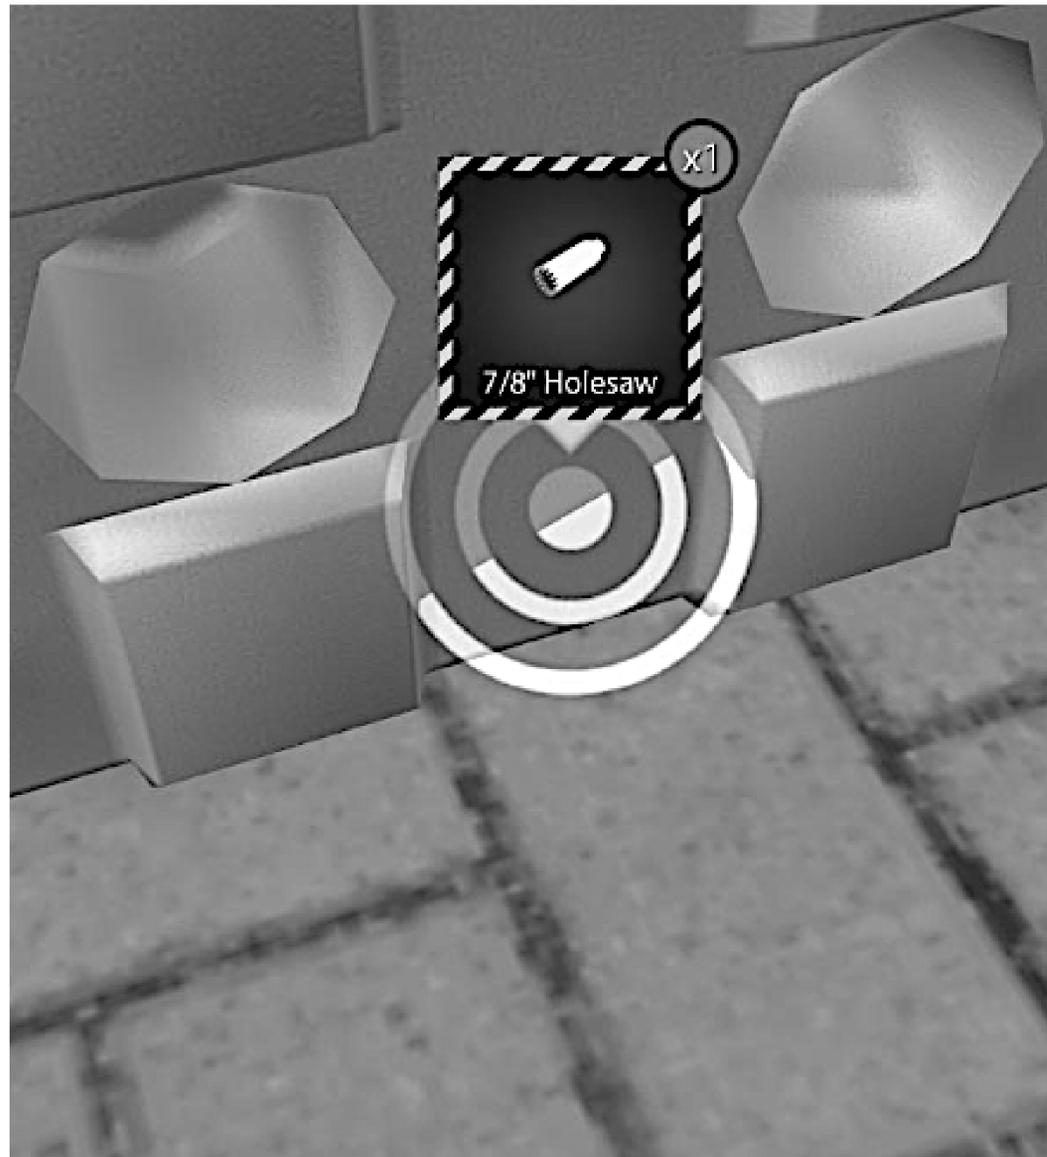


## PRO TIP

Do not drill hole on a seam or near edges. Consider laying the tank flat to make the job easier

## STEP 02: INSERT EZIFLOW FITTING

Press stainless tube into barbed spigot as shown. Place O-rings in grooves and screw spigot 2-3 turns into housing. Insert barbed end into hole, ensuring O-rings remain located in grooves

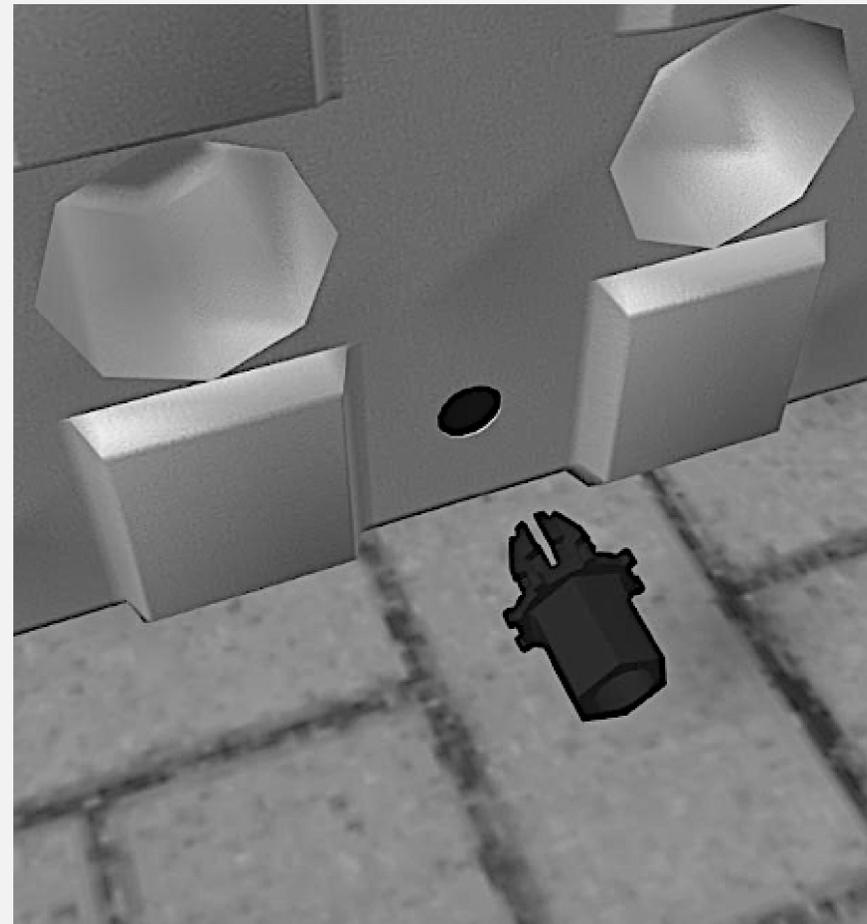

### PRO TIP

Ensure the stainless tube has gripped inside the spigot but do not push all the way into the barbed section

Success is the sum of small efforts repeated day in and day out  
- Robert Collier

## STEP 03: HEX MARKS THE SPOT

Insert end number 2 of Spindle Spanner into Housing and push stainless tube until spanner end is located in hexagon socket



### PRO TIP

Ensure the Number 2 end remains fixed in the internal socket in preparation for the next step

You are a work in progress; embrace every step of the process



## STEP 04: TIGHTEN THE HOUSING

In a world where you can be anything, be yourself


Ensuring O-rings continue to remain in grooves, grip exposed tool with pliers and tighten Eziflow housing with a wrench, before removing the spanner tool from the internal socket

### PRO TIP

BE CAREFUL TO NOT OVERTIGHTEN THE EZIFLOW HOUSING. THIS MAY CAUSE THE THREAD TO STRIP, RESULTING IN WATER SEEPAGE

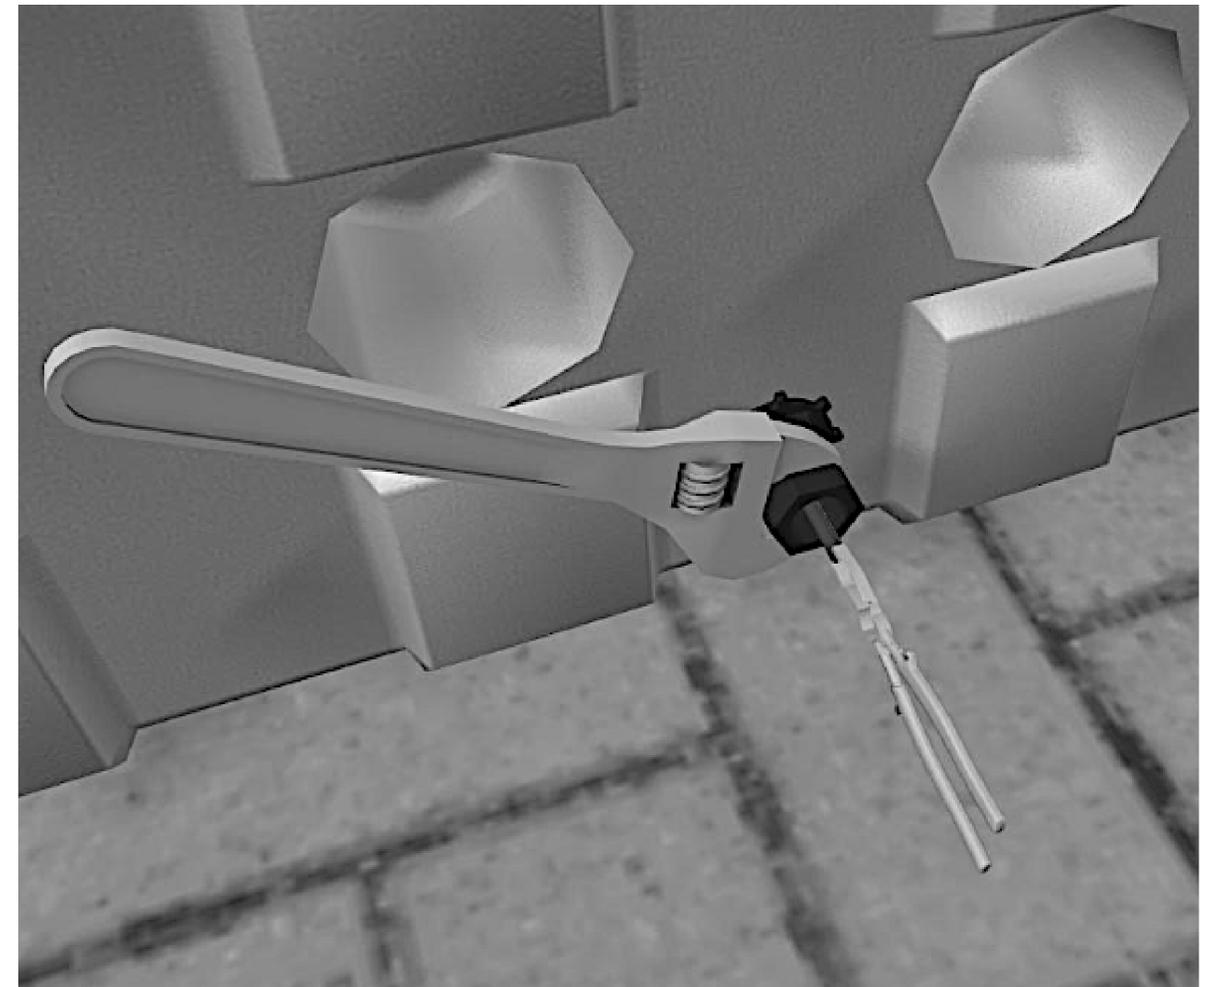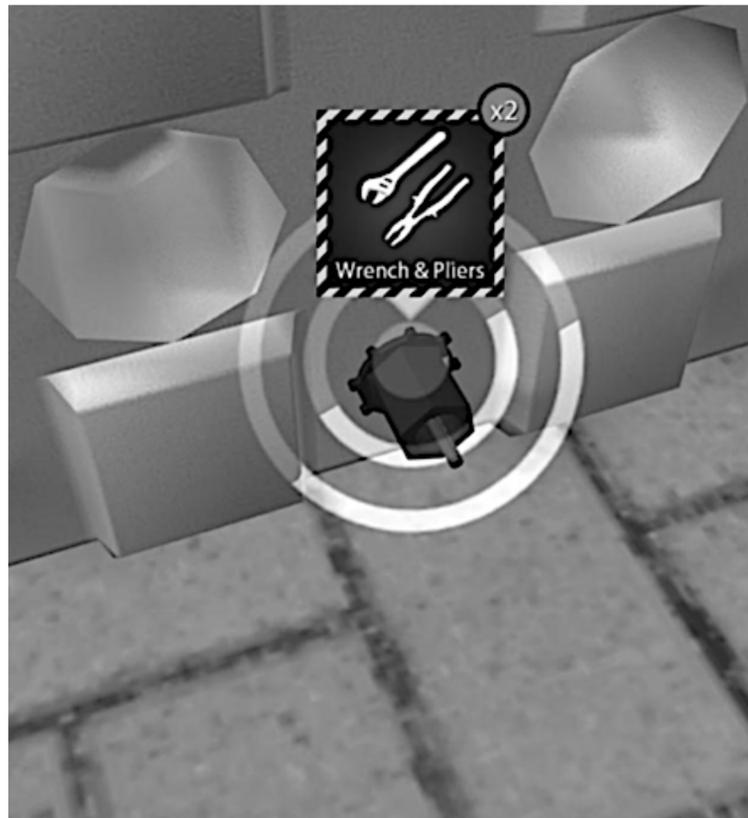

Hold the Housing while attaching faucet. When tight, locate to desired position by rotating clockwise

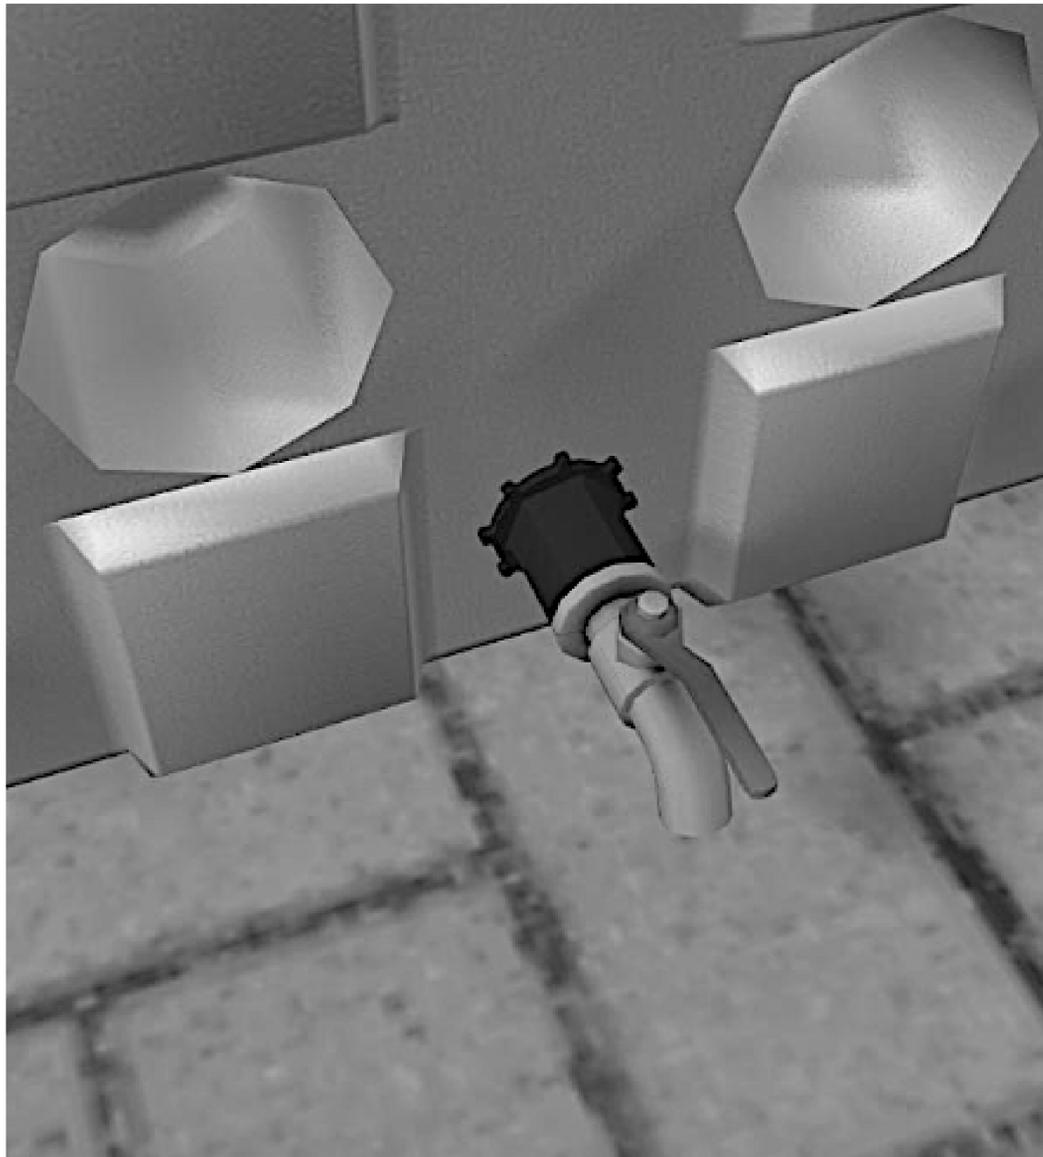


### PRO TIP

UPON COMPLETION, DO NOT DISCARD THE SPANNER TOOL. FEEL FREE TO USE THE NUMBER "3" ON YOUR FAVOURITE BEVERAGE AS A REWARD FOR A JOB WELL DONE

Challenges are  
opportunities in  
disguise

FOR EZIFLOW PRODUCT INFORMATION OR  
STOCKISTS, HEAD TO  
WWW.OZIFLOW.GLOBAL  
OR



**CONTACT US**

ONE WORLD TRADE CENTER  
SUITE 8500, NEW YORK CITY  
NEW YORK, 10007 UNITED STATES  
CUSTOMER LOVING  
OFFICE: +1 212 220 6545  
EMAIL: [INFO@OZIFLOW.GLOBAL](mailto:INFO@OZIFLOW.GLOBAL)

HOME  
SWEET  
HOME

