

ARBOR

TABLE OF CONTENTS

ROPE	PAGES
CLIMBING ROPE	2 - 3
RIGGING ROPE	4
ROPE ASSEMBLIES	
FLIP LINES	5
LANYARDS	6 - 9
SLINGS	10
SAVERS	11 - 12
HARDWARE	
DESCENDERS	13
ASCENDERS	14 - 15
ROPE ADJUSTERS	16
SWIVEL	16
SNAPHOOKS	17
CARABINERS	18 - 22
CONNECTORS	23
PULLEYS	24 - 25
RIGGING TOOLS	26
FIDDLE BLOCKS	27
TERMINATION PLATE	27
PORT-A-WRAPs	28
GEAR	
EARMUFFS	29
HELMETS	30 - 33
VISORS	34 - 37
SADDLES	38
HARNESSES	39
CLIMBERS	40
GUARDS/STRAPS	41
BAGS	
ROPE BAGS	42
THROW BAGS	43
TOOLS	44 - 45
TREE TRIMMING	
POLES	46 - 47
PRUNERS	48
KITS	49
SAWS	50 - 51
TOOLS	52

16 Strand Arborist Rope from PELICAN ROPE

This high-strength composite climbing rope features a tough 16 strand braided chemical resistant polyester cover over a non-rotational nylon parallel core. This construction results in a smooth running rope ensuring fewer snags and minimal abrasion. Its 16 strand weave is steam set which helps to eliminate cover over core slippage.



Rotary #	OEM	Tensile Strength	Strand	Rope Dia.	Length	Eye Options	Color
43 - 16763	4A-1605-150H	7,150 lbs	16	1/2"	150' ft		Orange, White
43 - 16764	4A-1605-200H	7,150 lbs	16	1/2"	200' ft		Orange, White
43 - 16881	4A-1605-150TSE	7,150 lbs	16	1/2"	150' ft	Tight Spliced Eye	Orange, White
43 - 16882	4A-1605-200TSE	7,150 lbs	16	1/2"	200' ft	Tight Spliced Eye	Orange, White
43 - 16873	4A-1601-150H	7,150 lbs	16	1/2"	150' ft		Blue, White
43 - 16874	4A-1601-200H	7,150 lbs	16	1/2"	200' ft		Blue, White
43 - 16875	4A-1601-150TSE	7,150 lbs	16	1/2"	150' ft	Tight Spliced Eye	Blue, White
43 - 16876	4A-1601-200TSE	7,150 lbs	16	1/2"	200' ft	Tight Spliced Eye	Blue, White

24 Strand Arborist Rope from PELICAN ROPE

This double-ply braid features a tough chemical resistant polyester cover over a strong nylon core. Pelican's 24 strand braided cover is smooth running over sheaves.



Rotary #	OEM	Tensile Strength	Strand	Rope Dia.	Length	Eye Options	Color
43 - 16759	4A-14Y-120H	7,000 lbs	24	7/16"	120' ft		Yellow, Black
43 - 16760	4A-14Y-150H	7,000 lbs	24	7/16"	150' ft		Yellow, Black
43 - 16761	4A-14Y-200H	7,000 lbs	24	7/16"	200' ft		Yellow, Black
43 - 16871	A4A-14Y-150TSE	7,000 lbs	24	7/16"	150' ft	Tight Spliced Eye	Yellow, Black
43 - 16872	A4A-14Y-200TSE	7,000 lbs	24	7/16"	200' ft	Tight Spliced Eye	Yellow, Black

Arborist Pro Climbing Rope from PELICAN ROPE

The Arborist Pro is a unique hand-spliced 24 strand rescue rope, designed for use in both MRS and SRT climbing systems. The professional arborist line looks great, provides easy knotability, and zero milking. The bright colors of the rope ensure excellent visibility. As a high-performance climbing line, it runs smoothly over sheaves and through gear, this results in faster ascending and finer control while descending.

The double-ply braid features abrasion and chemical resistant polyester cover over a strong nylon. The polyester cover provides excellent UV protection, high-abrasion resistance, and unmatched durability. The nylon core holds better and creates stronger knots, due to its stretch and texture.



Tight Spliced Eye



Rotary #	OEM	Tensile Strength	Rope Dia.	Length	Eye Options	Color
43 - 17118	A4A-15LY15-120TSE	7,000 lbs	7/16"	120' ft	Tight Spliced Eye	Green, Orange, Yellow
43 - 17119	A4A-15LY15-150TSE	7,000 lbs	7/16"	150' ft	Tight Spliced Eye	Green, Orange, Yellow
43 - 17120	A4A-15LY15-200TSE	7,000 lbs	7/16"	200' ft	Tight Spliced Eye	Green, Orange, Yellow
43 - 17121	4A-15LY15-150H	7,000 lbs	7/16"	150' ft		Green, Orange, Yellow
43 - 17122	4A-15LY15-200H	7,000 lbs	7/16"	200' ft		Green, Orange, Yellow

Static Master Pro Climbing Rope from PELICAN ROPE

Static Master Pro is a static kernmantle rope with a polyester core and cover. Because of its 100% polyester composition, this rope is very low-stretch yet high-strength. It is also very flexible, smoothly passing over pulleys and sheaves.

Withstands rugged outdoor conditions, Extremely low-stretch, Highly Flexible, High Strength



Rotary #	OEM	Tensile Strength	Rope Dia.	Length	Eye Options	Color
43 - 16891	1WPP-14L54-150H	6,300 lbs	7/16"	150' ft		Lime, Orange
43 - 16892	1WPP-14L54-200H	6,300 lbs	7/16"	200' ft		Lime, Orange
43 - 16893	A1WPP-14L54-150SNTE	6,000 lbs	7/16"	150' ft	Sewn Eye / Thimble	Lime, Orange
43 - 16894	A1WPP-14L54-200SNTE	6,000 lbs	7/16"	200' ft	Sewn Eye / Thimble	Lime, Orange
43 - 16895	1WPP-161L54-150H	9,000 lbs	1/2"	150' ft		Blue, Lime
43 - 16896	1WPP-161L54-200H	9,000 lbs	1/2"	200' ft		Blue, Lime
43 - 16897	A1WPP-161L54-150SNTE	7,800 lbs	1/2"	150' ft	Sewn Eye / Thimble	Blue, Lime
43 - 16898	A1WPP-161L54-200SNTE	7,800 lbs	1/2"	200' ft	Sewn Eye / Thimble	Blue, Lime

WARNING:
Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Matador Bull Rigging Rope from PELICAN ROPE

By combining a polyester cover over a nylon core, we've created a high force rope that offers dependability and unsurpassed resistance to abrasion, sunlight and common chemicals. The Matador Bull Rope provides shock absorption properties similar to nylon along with a tough polyester cover. Pelican Tuff urethane coating provides additional UV protection and increased abrasion resistance. Abrasion resistant, Shock Absorbent, Even Balanced, spliceable. Double Braid, Polyester cover, Nylon core.



Pelican Rope
The Most Trusted Name in Rope



Rotary #	OEM	Tensile Strength	Rope Dia.	Length	Color
43 - 16765	4B-16C3-150H	10,000 lbs	1/2"	150' ft	Green
43 - 16766	4B-16C3-200H	10,000 lbs	1/2"	200' ft	Green
43 - 16883	4B-18C1-150H	12,200 lbs	9/16"	150' ft	Blue
43 - 16884	4B-18C1-200H	12,200 lbs	9/16"	200' ft	Blue
43 - 16767	4B-20C5-150H	16,000 lbs	5/8"	150' ft	Orange
43 - 16768	4B-20C5-200H	16,000 lbs	5/8"	200' ft	Orange
43 - 16769	4B-24CY-150H	25,000 lbs	3/4"	150' ft	Yellow
43 - 16770	4B-24CY-200H	25,000 lbs	3/4"	200' ft	Yellow

Rig Master Rigging Rope from PELICAN ROPE

Pelican's 3 strand composite rope has the durability required for the job, while remaining lightweight and allowing for a comfortable grip. It also offers excellent energy absorption and abrasion resistance.

Very little water absorption, easy handling and splicing, color-coded by strength, lightweight but strong.



Pelican Rope
The Most Trusted Name in Rope



Rotary #	OEM	Tensile Strength	Rope Dia.	Length	Color
43 - 16885	PD-1604-150H	5,800 lbs	1/2"	150' ft	White, Black
43 - 16886	PD-1604-200H	5,800 lbs	1/2"	200' ft	White, Black
43 - 16887	PD-2001-150H	8,600 lbs	5/8"	150' ft	White, Blue
43 - 16888	PD-2001-200H	8,600 lbs	5/8"	200' ft	White, Blue
43 - 16889	PD-2405-150H	10,500 lbs	3/4"	150' ft	White, Orange
43 - 16890	PD-2405-200H	10,500 lbs	3/4"	200' ft	White, Orange

Wire Core Flip Line from U.S. RIGGING

Highly visibility flip line is constructed with a tightly braided 16 strand polyester sheath Pelican Rope over flexible heavy duty 1/4" diameter 7x19 galvanized aircraft cable (GAC).



Warning: These products are conductive.
Do not use wire core near electrical lines



Rotary #	OEM	Standards	Rope Dia.	Length	End Fittings	Color
43 - 16856	FL-A16-08SE	ANSI Certified	1/2"	8' ft	Steel Swivel	Orange
43 - 16812	FL-A16-10SE	ANSI Certified	1/2"	10' ft	Steel Swivel	Orange
43 - 16813	FL-A16-12SE	ANSI Certified	1/2"	12' ft	Steel Swivel	Orange
43 - 16857	FL-A16-15SE	ANSI Certified	1/2"	15' ft	Steel Swivel	Orange
43 - 16814	FL-A20-10SE	ANSI Certified	5/8"	10' ft	Steel Swivel	Orange
43 - 16815	FL-A20-12SE	ANSI Certified	5/8"	12' ft	Steel Swivel	Orange
43 - 16858	FL-A20-15SE	ANSI Certified	5/8"	15' ft	Steel Swivel	Orange

Removable Better Rope Grab Flip Line Kit from U.S. RIGGING

This set includes all components of our standard All-In-One Flip Line Kit but featuring our Removable Better Grab Rope. Stainless Steel core, Removable aluminum cam, Ergonomic rubberized cover. 16 Strand, Polyester cover, wire core.




Warning: These products are conductive.
Do not use wire core near electrical lines



Rotary #	OEM	Standards	Rope Dia.	Length	End Fittings	Color
43 - 16862	FLK33-A16-10SE	ANSI Certified	1/2"	10' ft	Steel Swivel	Orange
43 - 16863	FLK33-A16-12SE	ANSI Certified	1/2"	12' ft	Steel Swivel	Orange
43 - 16864	FLK33-A16-15SE	ANSI Certified	1/2"	15' ft	Steel Swivel	Orange
43 - 16865	FLK33-A20-10SE	ANSI Certified	5/8"	10' ft	Steel Swivel	Orange
43 - 16868	FLK33-A20-12SE	ANSI Certified	5/8"	12' ft	Steel Swivel	Orange
43 - 16867	FLK33-A20-15SE	ANSI Certified	5/8"	15' ft	Steel Swivel	Orange

Prusik Lanyard from PELICAN ROPE

The Prusik is ideal for tree work, rappelling, and rescue loops. This prusik loop allows you to modify the hitch with any number of different knots applied. It is engineered specifically to provide the perfect grip and offers incredible abrasion resistance. The synthetic Technora fiber offers exceptional stability and a remarkably high melting point. Featuring hand-sewn eyes, these prusiks are designed to survive longer in some of the most extreme conditions. Construction: Kernmantle, Cover: Poly-Technora, Core: Technora or Nylon.

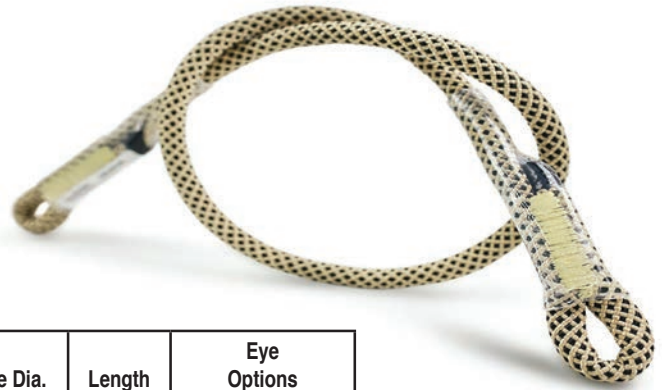

Rotary #	OEM	Tensile Strength	Rope Dia.	Length	Eye Options
43 - 16771	LYSE-10T4-28	5,400 lbs	8 mm	28"	Hand Sewn
43 - 16772	LYSE-10T4-30	5,400 lbs	8 mm	30"	Hand Sewn
43 - 16773	LYSE-10T4-32	5,400 lbs	8 mm	32"	Hand Sewn
43 - 16774	LYSE-13T4-28	5,400 lbs	10 mm	28"	Hand Sewn
43 - 16775	LYSE-13T4-30	5,400 lbs	10 mm	30"	Hand Sewn
43 - 16776	LYSE-13T4-32	5,400 lbs	10 mm	32"	Hand Sewn
43 - 16777	LYSE-13T4-34	5,400 lbs	10 mm	34"	Hand Sewn



Eye to Eye Prusik from BUCKINGHAM

Eye to Eye Prusik, 32" long, 10mm diameter, Rope is polyester core with aramid cover by ocean polyester. The stitched pattern creating the eyes are covered with heat shrink tubing for longer wear. For use on a rope lanyard as an adjuster or on a climbing line as a friction hitch.



Rotary #	OEM	Length	Rope Dia.	Color	Standards
Eye to Eye Prusik					
43 - 17031	P9J8Y-10-32S1	32"	.393" (10mm)	Red, Yellow	ANSI Z133-17



SuperSaver Prusik from BUCKINGHAM

Flintlocker Double hole SuperSaver friction ring with prusik attached. SuperSaver Prusik 14" long. Rope is 5/16" Warspeed Red Rope.



Rotary #	OEM	Length	Rope Dia.	Color
SuperSaver Prusik				
43 - 17056	P9S8V+P-16	14"	5/16" (7.93mm)	Red



Trimmer Adjustable Lanyard from KONG

The Trimmer adjustable lanyard is for use in work positioning systems, in conjunction with a fall arrest device. It enables quick and accurate length adjustment, allowing optimal work station positioning.

Main features:

- Fitted with a device for progressive length adjustment for the optimal work position.
- It can be used on the harness lateral attachment points to distribute the load of an upright user: the length is adjusted by pressing the ergonomic lever.
- You can use the single ventral attachment point of the harness to distribute the load between the belt and the leg loops of the suspended user.
- Fitted with a sliding protective sheath to protect the rope from contact points that could damage it.
- Available in different lengths.



TRIMMER
43 - 16906 / 16907

TRIMMER SET
43 - 16904 / 16905

Rotary #	OEM	Standards	Color	Length m	g	Rope Dia. ø mm	?
TRIMMER							
43 - 16906	289U00200KK	EN 358	Black, Orange	2	375	11	-
43 - 16907	289U00300KK	EN 358	Black, Orange	3	455	11	-
TRIMMER SET							
43 - 16904	289SETU01KK	EN 358	Black, Orange	2	510	11	Tango
43 - 16905	289SETU02KK	EN 358	Black, Orange	3	590	11	Tango



Speed Line Kit from KONG

Kit Contains:

- 5 Ergo wire carabiners
- 10 Rubber sling stoppers
- 2 80 cm Bull lanyards
- 2 120 cm Bull lanyards
- 1 150 cm Bull lanyard
- 1 Carrying bag
- 1 Plated bronze ring
- 1 Mini D. carabiner




Rotary #	OEM
43 - 17162	9X0000110KK



WARNING:
Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Adjustable Lanyard from BUCKINGHAM


Stitched Adjustable lanyard.

Rotary #	OEM
 43 - 17059	9VV227



Treesqueeze Positioning Lanyard from BUCKINGHAM


Treesqueeze positioning lanyard now features a newly designed nylon cover to create rigidity and prevent twisting of the Uniline. This allows for easier adjustment and mobility. Treesqueeze 2.0 integrates a choking lanyard system that keeps you from falling down the tree in the event of a Gaff out. Easily create tie-in point where natural tie-in doesn't exist. Doubles as a retrievable friction saver.

Rotary #	OEM	Standards	Length
 43 - 17030	L+08T110A6+J1	ANSI Z133	10'



Positioning Lanyard from BUCKINGHAM

12ft. Positioning lanyard using high durability rope and the "The BuckGrab LAD" (Length Adjusting Device) that incorporates a Patented 90 degree twist in the eye of the CAM eliminating the need for a locking twisted clevis. Aluminum hardware. Diameter 7/16".

Rotary #	OEM	Length
 43 - 17029	92F+R-12	12'



Buck Tool Tether Lanyard from BUCKINGHAM

Save yourself the worry of dropping a tool with the Buck Tool Tether lanyard that keeps your tools secured. Expands with the user's reach to reduce fatigue and contracts easily to the original length when not in use. Features stretch cord surrounded by tubular nylon webbing, lock stitching at both ends for extra security and adjustable tool loop.



Rotary #	OEM	Standards	Length	Max. Weight Capacity	Color
Tool Tether					
43 - 17049	600071	ANSI/ISEA 121-2018	38" - 51"	15 lbs	Green, Black



Chainsaw Lanyard from BUCKINGHAM

Chainsaw Lanyard features a 1-3/4" ring for suspension when not in use, an elastic bungee designed for safety and convenience that measures 42" fully extended and a tear away safety pack that activates when 200 lbs. of force is applied.



Rotary #	OEM	Length	Max. Weight Capacity	Color
43 - 17039	25G12A	42"	200 lbs	Green, Black



Loopie Sling Rope from PELICAN ROPE

The Maniac Loopie Sling is a hollow grade, non-stretch, high-strength rope that is easily adjustable. Use this line for forming knotless continuous loops. It is designed specifically to make girth-hitching easy and can handle incredible amounts of weight. This loopie is fully compatible with most rigging hardware and resists abrasion and picking. Polyester cover.



Rotary #	OEM	WLL	Rope Dia.	Length	Color
43 - 17060	A7PE2-16CY-06L	2,000 lbs	1/2"	2-6' ft	Yellow

Whoopie Sling Rope from Pelican Rope

The Brainiac Whoopie Sling is fully adjustable and designed especially for use with port-a-wraps and other anchoring devices for tree rigging. Create girth hitches and choke points on trees without carabiners or other connecting links. The Brainiac Whoopie is perfect for lowering wood, limbs and branches. Polyester cover.



Rotary #	OEM	WLL	Rope Dia.	Length	Color
43 - 17061	A7PE2-20C1-07A	2,800 lbs	5/8"	3-7' ft	Blue

Adjustable Rigging Block Sling from PELICAN ROPE

The Adjustable Rigging Block Sling is a low-stretch, abrasion resistant line with maximum versatility. Its variable eyes, large pockets for adjustment. Chafe Master chafe guard, and custom Tuff Coat urethane coating make this the best rigging sling on the market. Polyester core and cover.



Rotary #	OEM	Strength Load	Rope Dia.	Length	Color
43 - 17062	APAE2-20C1-12E	14,800 lbs	5/8"	12' ft	Blue

Dead Eye Sling with Tenex Rope from BUCKINGHAM

An eye sling that features a 3/4" or 5/8" tenex braid rope and a 17,000 - 22,400 lbs.



43 - 17028

43 - 17024

Rotary #	OEM	Length	OD	Weight Capacity
43 - 17028	39078T-14	14'	5/8"	17,000 lbs.
43 - 17024	39074T-8	8'	3/4"	22,400 lbs.

ArborMaster Friction Savers from BUCKINGHAM

Allow for easy installation and retrieval from the ground. Benefits include less bend radius, less friction (easier to climb) and reduced wear to a rope. Can be used as a false crotch. Ring is made of aluminum. Rated for human support only.

Rotary #	OEM	Standards	Length
43 - 17032	57-48	ANSI Z133.1-2012	48"
43 - 17033	57-60	ANSI Z133.1-2012	60"
43 - 17034	57-72	ANSI Z133.1-2012	72"



SuperSaver from BUCKINGHAM

The SuperSaver is the next generation Friction Saver and Canopy Anchoring Device designed to grow with the climber and is the most revolutionary and versatile adjustable Friction Saver and Canopy Anchor combination ever seen.

Rotary #	OEM	Length	Width	Color
43 - 17058	64-6	6'	2-1/2"	Black, Green



Buck Retrieval Key from BUCKINGHAM

Buck retrieval key is used to easily retrieve your friction saver from the ground. The retrieval ring passes through the larger ring to release the friction saver. 8-1/4" Dyneema cord.

Rotary #	OEM	Length	Ring Width
43 - 17035	57KEY	8-1/4"	1-1/8"





43 - 17158



43 - 17159

Strap from KONG

Kong nylon high quality webbing strap for quickdraws, climbing, caving, canyoning and many other uses.



Rotary #	OEM	Standards	Color	Material	g	kN	cm/length	mm/width
43 - 17158	270T01200KK	EN 566, UIAA	Yellow	Nylon	10	23	12	15
43 - 17159	270T01600KK	EN 566, UIAA	Orange	Nylon	12	23	16	15



43 - 16899



43 - 16900



43 - 16901

Tree Fork from KONG

The Tree Fork is for tree climbing and is composed of heavy-load webbing and two different-sized aluminum rings, for recovery from the ground. Available in 3 lengths (90,140 and 230 cm) with different colors. Width 25mm (.98").



Rotary #	OEM	Standards	Color	Material	g	kN	cm/length	mm/width
43 - 16899	210A090Y0KK	EN 795B - EN 354 EN566 - UIAA104	Yellow	Polyamide	230	25	90	25
43 - 16900	210A140N0KK	EN 795B - EN 354 EN566 - UIAA104	Black	Polyamide	305	25	140	25
43 - 16901	210A230R0KK	EN 795B - EN 354 EN566 - UIAA104	Red	Polyamide	435	25	230	25



43 - 16800



43 - 16802



43 - 16803



Descenders from U.S. RIGGING




Rotary #	OEM	MBS	Rope Dia.	Rope Dia.	oz.	Color
Figure 8 Descender						
43 - 16800	USR-835-AU	35kN	9 mm	12 mm	4.3	Alum Alloy
Big 8 Alum Descender with Ears						
43 - 16802	USR-840-AU	40kN	9 mm	16 mm	9.1	Orange
Big 8 Stainless Steel Descender with Ears						
43 - 16803	USR-850-S	50kN	11 mm	16 mm	26	Steel

8 Classic Tactical Descender from KONG

Classic figure "8" descender. Perfect for belaying the first climber with a half, single and double ropes. A true workhorse for Kong, which continues to be popular all over the world. It works on ropes from 9 to 12 mm.



Rotary #	OEM	Standards	Material	Main Dim.	Min Rope Dia	Max Rope Dia.	oz.	Color
43 - 16801	80503N400KK	NIT 271-1 NIT271-2 EN 15151-2	Alu Alloy	140 mm	9 mm	12 mm	110	Black

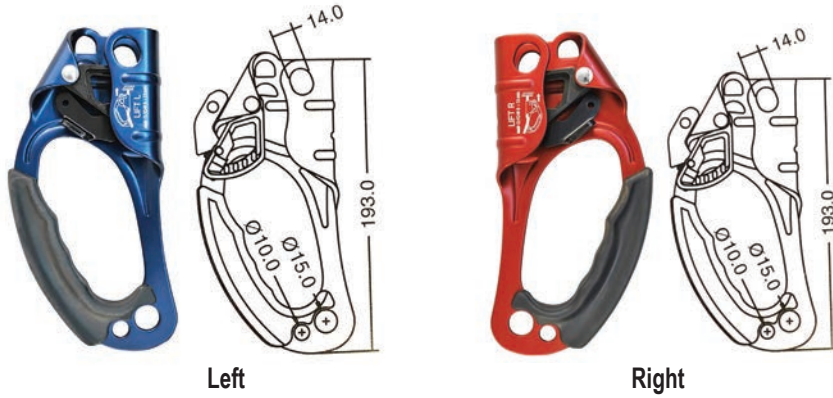

Single Lift Ascender from KONG

Single lift ascender. Excellent ability to block out particularly on muddy and icy ropes. Has great wear resistance. Opening lever is ergonomic, easy to handle and protected from shocks and from the risk of accidental opening. Fitted with anti-overturning system of the cam. Aluminum Anodized, for rope diameters 8mm to 13mm.

Rotary #	OEM	Standards	Material	Main Dim.	Min Rope Dia	Max Rope Dia.	⚠ g	Color
Single Lift Ascender - Left								
⚠ 43 - 16806	896B04S00KK	EN 567 EN 12841B	Alu Alloy	193 mm	8 mm	13 mm	225	Blue
Single Lift Ascender - Right								
⚠ 43 - 16805	896R04D00KK	EN 567 EN 12841B	Alu Alloy	193 mm	8 mm	13 mm	225	Red



Trender Rope Clamp from KONG

Double ascender conceived specifically for arboriculture. Fitted with a safety system that prevents accidental rope escape and intrusion of branches into the toothed cam. It works on twin ropes from 8 to 13 mm.



Rotary #	OEM	Standards	Material	Color	⚠ g	Rope min./mm	Rope max./mm
⚠ 43 - 16924	874030400KK	EN 12841/B	Alu Alloy Stainless Steel	Orange, Black	550	8	13

Futura System Rope Clamps from KONG

A revolution in the rope clamp world for its extremely tiny dimensions and ergonomic shapes. It's the natural marriage between three devices and the best system for ascending a rope. The "Rope Walking System" is like climbing a ladder. After testing the system, users confirm excellent performance and a 30% efficiency gain during ascent.



43 - 16925

43 - 16926

Futura Hand from KONG

Its small size allows the user to comfortably hold the device close to the rope, in the same way you would grab a rope but much more comfortably. It comes with two different sized handles for ergonomic customization. Available in right and left versions.



43 - 16923

Futura Body from KONG

Chest ascender, incredibly reduced size and weight, only 80g!



43 - 16927

Futura Foot from KONG

Foot ascender that improves and completes the performance of the Futura Hand ascender and Futura Body chest ascender. Available in right and left versions, equipped with nati-torsion stirrup. **Shoes not included.**

43 - 16928



Rotary #	OEM	Standards	Material	Color	g	Rope min./mm	Rope max./mm
FUTURA HAND							
43 - 16925	87600ON4SKK (left)	EN 12841/B	Alu Alloy	Orange, Black	125	8	12
43 - 16926	87600NO4DKK (right)	EN 12841/B	Alu Alloy	Orange, Black	125	8	12
FUTURA BODY							
43 - 16923	94200NO00KK	EN 567/EN 12841/B	Alu Alloy	Black, Orange	80	9	11
FUTURA FOOT							
43 - 16927	87609OO6DKK (right)	EN 567/ EN 12841/B	Alu Alloy	Orange	130	8	13
43 - 16928	87609NO6SKK (left)	EN 567/ EN 12841/B	Alu Alloy	Black	130	8	12

Better Grab Removable Rope Grab from U.S. RIGGING

Large thumb rest for precise control. Removable Aluminum alloy cam. Ergonomic, rubberized cover. Stainless steel core.



Rotary #	OEM	Rope Dia.	Rope Dia.	oz.	Color
Better Grab Removable Rope Grab					
43 - 16809	USR-MRG-333	7/16"	5/8"	8.7	Alum Alloy

Aluminum Mini Rope Grab from U.S. Rigging

Removable Cam, Fixed bolt and nut. Aluminum Alloy, Hard Anodized.



Rotary #	OEM	Rope Dia.	Rope Dia.	oz.	Color
Aluminum Mini Rope Grab					
43 - 16808	USR-MRG-200	11 mm	16 mm	11	Alum Alloy

Multi Use Rope Clamp from KONG

This innovative emergency rope clamp conceived for single ropes with a diameter between 8 and 13mm, is the first and only clamp that also works on flat and tubular slings from 10 to 15 mm width (even if these are not certified for progression). Due to its small dimensions, it can be easily attached with one hand. The big hole allows locking connectors to rotate.



Rotary #	OEM	Standards	Material	Color	g	Rope min./mm	Rope max./mm
43 - 16993	88800NG00KK	EN 567 and UIAA	Alu Alloy	Green, Black	-	8	13

Chest Rope Clamp from KONG

Chest Rope Clamp specifically conceived for climbing, caving, rescue, work at height, canyoning. Excellent ability to block out particularly on muddy and icy ropes, thanks to the holes on the cam. New opening lever is ergonomic and protected from shocks and from the risk of accidental opening. Fits with anti-overturning system of the cam.



Rotary #	OEM	Standards	Color	Length	Rope min./mm	Rope max./mm
43 - 17098	82400N400KK	EN 567 and EN 12841/B	Black	4.52"	8	13



Double Ball Bearing Swivel from U.S. RIGGING

Double ball bearing swivel. This swivel aids to eradicate twisting in critical lines due to load rotation and keeps rope from becoming wrapped.



Rotary #	OEM	Material	kN	Length	Width
43 - 16810	USR-DSL-A	Forged Aluminum	40	4.25"	2.16"



43 - 16796



43 - 16797



43 - 16843

Steel Snaphooks from U.S. RIGGING



Rotary #	OEM	Standards	◀ kN	↻ kN & mm	⚖️ oz.	Color
Steel Fixed-Eye Snaphook Dbl Action Gate						
⚠️ 43 - 16796	USR-01-CF09B	ANSI Z359.12-2009	23	16 20mm	10.3	Zinc Plated
Steel Swivel Snaphook Dbl Action Gate						
⚠️ 43 - 16797	USR-02-CS09B	ANSI Z359.12-2009	23	16 21mm	16.9	Zinc Plated
Steel Snaphook with Fixed Eye Dbl Action						
⚠️ 43 - 16843	USR-01-CF09	ANSI Z359.12-2009	23	16 22mm	12.6	Zinc Plated



43 - 16918



43 - 16919



43 - 16920

TANGO Fixed-Eye Snaphook from KONG

Hot forged aluminum carabiner with double gate.
Ideal for positioning lanyards.



Rotary #	OEM	Material	Standards	◀ kN	⬆️ kN	↻ kN	⚖️ g	Color
TANGO								
⚠️ 43 - 16918	7150X0QPPKK 71500BPX2KK	Alu Alloy	EN 362/T UIAA - EN 12275/K	33	10	15	130	Blue
⚠️ 43 - 16919	7150X0NNNK 71500NNX2KK	Alu Alloy	EN 362/T UIAA - EN 12275/K	33	10	15	130	Black
⚠️ 43 - 16920	7150X0RPPKK 71500RPX2KK	Alu Alloy	EN 362/T UIAA - EN 12275/K	33	10	15	130	Red

⚠️ WARNING:
Cancer and Reproductive Harm - www.P65Warnings.ca.gov



43 - 16778



43 - 16781



43 - 16779



43 - 16780



43 - 16837



43 - 16838

Steel Carabiners from U.S. RIGGING



Rotary #	OEM	Standards	◀ kN	◆ kN	∞ kN & mm	▲ oz.	Color
Equal D / Steel twist lock							
⚠ 43 - 16778	USR-12-CTLD	ANSI Z359.12-2009	45	15	16/13 14mm	7.6	Zinc Plated
Captive Eye / Steel triple lock							
⚠ 43 - 16781	USR-14-C3T	ANSI Z359.12-2009	45	-	16 20mm	11.0	Zinc Plated
MOD. D / Steel twist lock							
⚠ 43 - 16779	USR-12-CTLM	ANSI Z359.12-2009	50	16	16/12 20mm	9.0	Zinc Plated
Klettersteig / Steel twist lock							
⚠ 43 - 16780	USR-12-CTL	ANSI Z359.12-2009	45	16	16/12 27mm	9.9	Zinc Plated
Large D / Steel screw lock							
⚠ 43 - 16837	USR-98-C09S	NFPA 1983-G	60	16	16 31mm	9.7	Zinc Plated
Large D / Steel triple lock							
⚠ 43 - 16838	USR-98-C09T	ANSI Z359.12-2009	60	16	16 31mm	11.3	Zinc Plated



ALUMINUM CARABINERS from U.S. RIGGING



Rotary #	OEM	Standards	◀ kN	▲ kN	⊗ kN & mm	⚖ oz.	Color
I-Beamer Lite / Aluminum Alloy triple lock							
43 - 16786	USR-19-A3T	NFPA 1983	27	9	8 23mm	3.4	Silver
I-Beamer Lite / Aluminum Alloy twist lock							
43 - 16787	USR-19-ATL	NFPA 1983	27	9	8 23mm	3.6	Silver
I-Beamer Pin Kit							
43 - 16840	USR-19-PIN KIT Used with our 43-16783, 43-16786,43-16787						
I-Beamer / Aluminum Alloy triple lock							
43 - 16783	USR-19-A3T9	ANSI Z359.12-2009 NFPA 1983	27	16	16/8 18mm	4.1	Silver
Alum. Swivel / Aluminum Alloy triple lock							
43 - 16790	USR-221-A3TU		25	-	20mm	6.0	Alum, Green
I-Beamer / Aluminum Alloy twist lock							
43 - 16839	USR-19-AT9	ANSI Z359.12-2009 NFPA 1983	27	16	16/8 18mm	4.1	Silver
True Oval / Aluminum Alloy triple lock							
43 - 16792	USR-127-A3TU		22	7	19mm	2.9	Copper
True Oval / Aluminum Alloy straight gate							
43 - 16793	USR-127-AU		22	7	7 22mm	2.4	Copper
Copper Head / Aluminum Alloy triple lock							
43 - 16789	USR-128-A3TU		24	8	23mm	3.4	Copper



43 - 16791



43 - 16788



43 - 16835



43 - 16836



43 - 16794



43 - 16841



43 - 16842

ALUMINUM CARABINERS from U.S. RIGGING



Rotary #	OEM	Standards	◀ kN	⬆ kN	↻ kN & mm	⚖ oz.	Color
Fixed-Eye / Aluminum Alloy triple lock							
43 - 16791	USR-140-A3TU	-	28	-	22mm	3.9	Silver
BIG D / Aluminum Alloy triple lock							
43 - 16788	USR-107-A3TU	-	28	8	22mm	3.0	Silver
I-Beamer / Aluminum Alloy triple lock							
43 - 16835	USR-12M-A3TU	ANSI Z359.12-2009	24	-	16 12mm	5.2	Green
MOD. D / Aluminum Alloy twist lock							
43 - 16836	USR-117-ATL	NFPA 1983-T	28	8	22mm	3.0	Silver
MICRO 900 / Aluminum Alloy straight gate							
43 - 16794	USR-109BL	-	4	-	12mm	0.4	Blue
MICRO 900 / Aluminum Alloy straight gate							
43 - 16841	USR-109P	-	4	-	12mm	0.4	Pink
MICRO 900 / Aluminum Alloy straight gate							
43 - 16842	USR-109LG	-	4	-	12mm	0.4	Lime Green

Ovalone Carabiner from KONG

Oval connector wide opening. Ideal for heavy duty applications and for connection to structural anchors, lifelines, etc.

Available in carbon steel & Aluminum Alloy with auto block and twist lock sleeves standard version and high load ANSI certified.



43 - 16911



43 - 16912



Rotary #	OEM	Standards	◀ kN	◄ kN	⊙ kN	⚖ g	Color
Carbon steel ANSI auto block							
43 - 16911	412LP0211KK 412110ZOZKK	EN 362/M ANSI Z359.12	40	20	-	220	Black
Carbon steel ANSI twist lock							
43 - 16912	412LI0999KK	EN 362/M ANSI Z359.12	40	20	-	220	Silver



43 - 16916



43 - 16917



Rotary #	OEM	Standards	◀ kN	◄ kN	⊙ kN	⚖ g	Color
Alu alloy auto block							
43 - 16916	712LM00PNKK 712OPN7VNKK	EN 362/B, EN 12275/B, UIAA	26	9	-	79	Orange, Black
Alu alloy twist lock							
43 - 16917	712LG0RPPKK 712RPP3P1KK	EN 362/B, EN 12275/B, UIAA	26	9	-	79	Red, Black

OVALONE DNA Steel Carabiner from KONG

Special "helical-shape" connector with a twisted body and circular bar, a must-have when an "offset load is required. It permits 90 degree rotation of any connected device (descenders, rope clamps, fall arresters, etc.) optimizing the operating alignment.



43 - 16913



43 - 16914



Rotary #	OEM	Standards	◀ kN	◄ kN	⊙ kN	⚖ g	Color
Carbon steel ANSI auto block							
43 - 16913	411MP0999KK 414110ZOZKK	EN 362/M ANSI/ASSE Z359.12	40	16	12	230	Silver
Carbon steel ANSI twist lock							
43 - 16914	414LI0211KK 414110ZTZKK	EN 362/M ANSI/ASSE Z359.12	40	15	-	230	Black

D Shaped Steel Carabiner from KONG

Carabiner with a wide opening and high tensile strength. The D shape prevents carabiner rotation and allows the load to be distributed along the major axis. Available in carbon steel with different sleeves (screw, autoblock and twist-locks also conform to ANSI norm).



Rotary #	OEM	Standards	◀ kN	⬆ kN	⌚ kN	⬆ g	Color
Carbon Steel screw sleeve							
43 - 16908	411120ZL1KK 411MD021PKK	NFPC-G* EN 362/B	50	-	-	240	Black, Bronze
Carbon Steel ANSI auto block							
43 - 16909	411120ZOZKK 411MP0211KK	NFPA-G* - EN 262/M ANSI Z359.12	50	20	-	265	Black
Carbon Steel ANSI twist lock							
43 - 16910	411120TZKK 411MI0211KK	NFPA-G* - EN 262/M ANSI Z359.12	50	20	-	265	Black

Mini D Carabiner from KONG

The smallest aluminum carabiner with a screw sleeve. To be used for accessories and tools. Available in a straight gate version. **Warning! Not for human support.**







Rotary #	OEM	◀ kN	⬆ kN	⌚ kN	⬆ g	Color
Alu alloy straight gate						
43 - 16921	751E00GNDKK 751GN0400KK	6	-	-	26	Green, Black

FROG CABLE Connector from KONG

The Kong Frog is a revolutionary directional connector that closes automatically when it touches the anchor point. Updated version with improved opening up to 12.7mm. Also suitable for metal cables.



Rotary #	OEM	Material	Standards	◀ kN	⬆ kN	⌚ kN	⬆ g	Color
Frog Cable								
43 - 16915	7000XGNN0KK 7002NN400KK	Alu Alloy	EN 362/A/T EN 12275/A	25	-	-	50	Black

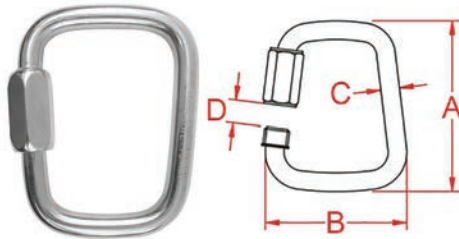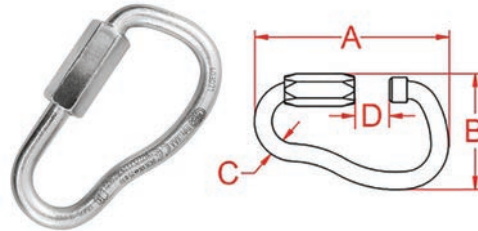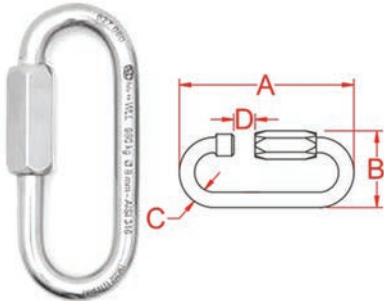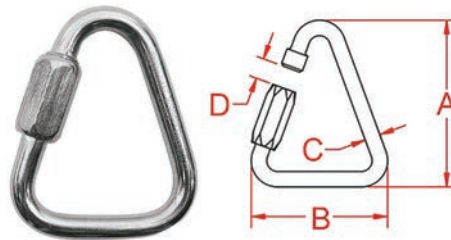Trapezium Quick Link

Quick Link Asymmetric

Quick Link Oval Long

Quick Link Triangle

Quick Link Connectors from KONG


Rotary #	OEM	Standards	Material	Color	M.B.S. ◀ kN	M.B.S. ◆ kN	M.B.S. ▶ kg	W.L.L. ◀ kg	g	A mm	B mm	C mm	D mm
Trapezium Quick Link													
⚠ 43 - 16991	538FC0P0PKK	-	Stainless Steel 316	Polish	-	-	4900	980	129	82	68	9	11
Quick Link Asymmetric													
⚠ 43 - 16992	403DB0101KK	EN 362/Q EN 12275/B	Carbon Steel	Polish	25	10	-	-	89	77.5	43.5	7	14
Quick Link Oval Long													
⚠ 43 - 16984	527EC0P0PKK	-	Stainless Steel 316	Polish	-	-	4900	980	85	89	37.5	8	17.5
⚠ 43 - 16985	527FC0P0PKK	-	Stainless Steel 316	Polish	-	-	6250	1250	115	95	41	9	19
⚠ 43 - 16986	527IC0P0PKK	-	Stainless Steel 316	Polish	-	-	8000	1600	160	105.5	45.5	10	20.5
⚠ 43 - 16987	527MC0P0PKK	-	Stainless Steel 316	Polish	-	-	1100	2200	260	124	52.5	12	23.5
Quick Link Triangle													
⚠ 43 - 16988	502EC0P0PKK	EN 12275/Q EN 362Q UIAA	Stainless Steel 316	Polish	40	10	-	-	89	72	56	8	10
⚠ 43 - 16989	502IC0P0PKK	EN 12275/Q EN 362Q UIAA	Stainless Steel 316	Polish	60	30	-	-	155	86	66	10	12
⚠ 43 - 16990	502OC0P0PKK	-	Stainless Steel 316	Polish	-	-	12250	2450	420	123	85	14	17

◀ Major axis ◆ Minor axis M.B.S. Minimum breaking strength W.L.L. Working load limit


WARNING:

Cancer and Reproductive Harm - www.P65Warnings.ca.gov



43 - 16849



43 - 16847



43 - 16846



43 - 16848

Aluminum Pulleys from U.S. RIGGING



Rotary #	OEM	MBS	Rope Dia.	Rope Dia.	oz.	Color
Aluminum Swing Pulley / Single Sheave						
43 - 16849	USR-PMS-AU	20kN	0 mm	11 mm	4.3	Orange
Extra Roll Aluminum Pulley / Single Sheave						
43 - 16847	USR-PSW-AU	30kN	0 mm	16 mm	8.7	Blue
Fixed-Side Mini Pulley / Single Sheave						
43 - 16846	USR-PFB-AU	5000 lbs	0 mm	13 mm	3.0	Orange
Aluminum Swing-Side Pulley / Twin Sheave						
43 - 16848	USR-PTW-AU	30kN	0 mm	16 mm	14.9	Orange



43 - 17109



43 - 17110



43 - 17111



43 - 17112



43 - 17113



43 - 17114



43 - 17115



43 - 17123

Aluminum Pulleys from CMI



Rotary #	OEM	MBS	SWL	Sheave Dia.	Sheave Mechanics	Sheave Material	Rope Dia. Max	oz.	Body Material	Color
Aluminum High Roller Rigging Pulley										
43 - 17109	RP105	16,000 lbs.	3,200 lbs.	3"	Oilite Bronze Bushing	Aluminum	5/8"	21	Stainless Steel	Silver
Aluminum Micro Rescue Pulley										
43 - 17110	RP110	7,000 lbs.	1,400 lbs.	1.25"	Oilite Bronze Bushing	Aluminum	1/2"	2.5	Anodized Aluminum	Pink
Aluminum Arborist Pulley										
43 - 17111	RP130	28,000 lbs.	5,600 lbs.	3"	Oilite Bronze Bushing	Aluminum	5/8"	37	Stainless Steel	Silver
43 - 17112	RP131	40,000 lbs.	8,000 lbs.	4"	Oilite Bronze Bushing	Aluminum	3/4"	90	Stainless Steel	Silver
43 - 17113	RP145	25,000 lbs.	5,000 lbs.	2.75"	Oilite Bronze Bushing	Aluminum	3/4"	58	Zinc-Plated Steel	Silver
43 - 17114	RP160	51,000 lbs.	10,200 lbs.	2.195"	Oilite Bronze Bushing	Aluminum Alloy	3/4"	47	High Strength Aluminum	Orange
43 - 17115	RP162	21,900 lbs.	4,380 lbs.	1.26"	Oilite Bronze Bushing	Aluminum Alloy	1/2"	16	High Strength Aluminum	Black, Orange
Aluminum TRI Tie Rigging Pulley										
43 - 17123	RP151	7,000 lbs.	1,400 lbs.	1.25"	Oilite Bronze Bushing	Aluminum Alloy	1/2"	-	-	Black, Orange

Stainless Steel Rigging Ring from U.S. RIGGING



Rotary #	OEM	◀ kN	Outside Dia.	Inside Dia.	▲ oz.	Color
Stainless Steel Rigging Ring						
⚠ 43 - 16851	USR-28-S	24	52mm	28mm	3.7	Stainless Steel
Stainless Steel Rigging Ring						
⚠ 43 - 16852	USR-46-S	24	70mm	46mm	5.4	Stainless Steel
Forged Steel Rigging Ring						
⚠ 43 - 16853	DBF-2004-1	150	102mm	76mm	10.0	Zinc Plated



43 - 16851



43 - 16852



43 - 16853

Arborist Aluminum Ring from BUCKINGHAM

These small multi-functional rings are designed to be used with a wide variety of arborist equipment such as friction savers, connection points, arborist saddles with rope or webbing suspension bridges etc. Manufactured from a high-quality aluminum alloy and then anodized to create a smooth finish to provide an effortless rope pull.



Rotary #	OEM	Breaking Strength	ID	OD	Thickness	Color
Aluminum Small Ring						
⚠ 43 - 17050	100A	23 kN	1.125"	2.25"	.50"	Alum Alloy
Aluminum Large Ring						
⚠ 43 - 17051	200A	23 kN	1.875"	3"	.50"	Alum Alloy




43 - 17050



43 - 17051

Rigging Plates from KONG

Rigging plates, designed for a tidy workplace and to create an easy system of multiple anchor points. The upper hole can accommodate two carabiners at the same time. Made of light aluminum alloy, very light, compact and durable. New 10mm thick version with beveled holes that allow textile items (rope, lanyards, straps) to be directly inserted without the need for connectors.

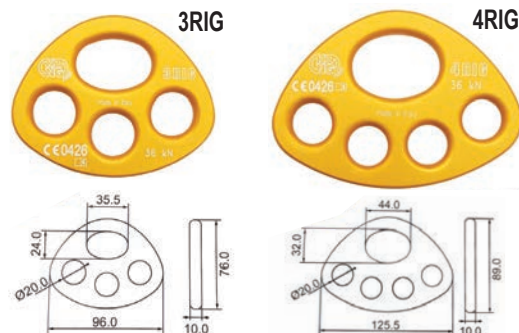

Rotary #	OEM	Standards	Material	◀ kN	▲ g	Color	A mm	Hole Dia. mm
3RIG								
⚠ 43 - 16982	864O16400KK	CNB/P/11.114 CEN TS 16415	Alu Alloy	36	95	Orange	96	20
4RIG								
⚠ 43 - 16983	864O17400KK	CNB/P/11.114 CEN TS 16415	Alu Alloy	36	150	Orange	125.5	20

Fiddle Block Hauler Kit from U.S. RIGGING

Fiddle block hauler kit. Features include 75' ft of 1/2" low-stretch load pro rope, progressive capture with bulldog prusik, two steel carabiners and a 5:1 mechanical advantage. Weight lift limit is 1000 lbs.



Rotary #	OEM	Material	Color	WLL	Sheave Dia.	Shackle
43 - 16854	USR-HAULER-75AP	Anodized Aluminum	Red	1000 lb.	2"	-

Aluminum Uni-Body Fiddle Block Rope Set from U.S. RIGGING

Anodized aluminum uni-body frame. Hard anodized aluminum sheaves. Non corroding Delrin bearings. Triple sheave system separates rope and helps to reduce chafing. Includes 50' ft of 1/2" rope. 4:1 Mechanical Advantage



Rotary #	OEM	Material	Color	WLL	Sheave Dia.	Shackle
43 - 16811	USR-FB-DLXR	Anodized Aluminum	Black	1000 lb.	2-5/8"	5/16"



Rope Termination Plate from U.S. RIGGING

Rope termination plate is designed for rope with diameters from 16mm to 19mm.







Rotary #	OEM	Standards	Material	Color	kN	oz.	Length	Width	Rope min./mm	Rope max./mm
43 - 16804	USR-TP	ANSI Z359.1-2007 A10.32-2012	Anodized Aluminum	Red	22	8.8	10.13"	2"	16	19





Port-A-Wrap from BUCKINGHAM

Buck Port-A-Wraps are compact rope friction devices designed for lowering heavy objects from height in a controlled and predictable manner. Made from nickel plated steel. With the Buck Port-A-Wrap lowering heavy wood can be controlled and done at a much faster pace while also lowering the potential for an accident. The user-friendly design also makes attaching rigging line a breeze.

Rotary #	OEM	Length	OD	Height	Max. Rope Size
Port-A-Wrap Mini					
 43 - 17023	601M	5-1/2"	1.32"	6-1/2"	1/2"
Port-A-Wrap Small					
 43 - 17021	601N	7-1/2"	1.9"	9"	5/8"
Port-A-Wrap Large					
 43 - 17020	601LN	9-1/2"	2.4"	11"	3/4"
Port-A-Wrap XL					
 43 - 17022	601XN	13"	3.5"	14"	7/8"





43 - 16939



43 - 16940



43 - 16941

Earmuffs from KONG

Noise reduction 3M Peltor headphones available in 3 versions with different levels of acoustic insulation. All models conform to UNI EN 352-3 norm. New version electrically insulated.



Rotary #	OEM	Standards	Color	g	Noise Reduction
43 - 16939	999130000KK	EN 352-3	Red	245	32 dB
43 - 16940	999140000KK	EN 352-3	Yellow	216	30 dB
43 - 16941	999160000KK	EN 352-3	Green	185	26 dB



43 - 16959



43 - 16960

Earmuffs from KASK

Attaches directly to all Zenith Series helmets. Requires Plasma Earmuff Adaptors to attach to all Plasma, Superplasma and HP series helmets.



Rotary #	OEM	Standards	Color	g	Noise Reduction
43 - 16959	WHP00004	-	Green	280	23-25 dB
43 - 16960	WHP00005	-	Yellow	320	28-38 dB

Earmuff Adaptor from KASK

Bayonet ear muff adaptor for integrating hearing protection on Plasma, Super Plasma and HP helmets.

Rotary #	OEM
43 - 16966	WAC00003





43 - 16937



43 - 16935



43 - 16936

SPIN Professional shock-absorbing Helmet from KONG

- Professional shock-absorbing helmet.
- Comfortable and well-ventilated interior that also guarantees a perfect fit.
- Removable and washable padding.
- Equipped with 4 durable clips for mounting headlamps.
- UNI Size
- Conforms to ANSI/ISEA Z89.1 and CE EN 397.



43 - 16938



Rotary #	OEM	Standards	Material	Color	g	Size	cm
43 - 16935	99720AW10KK	EN397 ANSI/ISEA Z89.1	ABS	White	385	UNI	52/62
43 - 16936	99720AO10KK	EN397 ANSI/ISEA Z89.1	ABS	Orange	385	UNI	52/62
43 - 16937	99720AY10KK	EN397 ANSI/ISEA Z89.1	ABS	Yellow	385	UNI	52/62
43 - 16938	99720AR10KK	EN397 ANSI/ISEA Z89.1	ABS	Red	385	UNI	52/62

Zenith X Safety Helmet from KASK

- Electric shock protection
- Integrated slots for attaching ear and face protection
- Lamp carrying clips
- Optimized top and side impact protection
- High tech quick drying comfort fabric


KASK

Rotary #	OEM	Standards	Material	Color	Size	cm
Zenith X						
43 - 16947	WHE00082.201	ANSI Z89.1 EN 12492	HD Polypropylene	White	UNI	53/63
43 - 16948	WHE00082.208	ANSI Z89.1 EN 12492	HD Polypropylene	Blue	UNI	53/63
43 - 16949	WHE00082.202	ANSI Z89.1 EN 12492	HD Polypropylene	Yellow	UNI	53/63
43 - 16950	WHE00082.204	ANSI Z89.1 EN 12492	HD Polypropylene	Red	UNI	53/63
43 - 16951	WHE00082.210	ANSI Z89.1 EN 12492	HD Polypropylene	Black	UNI	53/63
Zenith X Hi Viz						
43 - 16954	WHE00083.201	ANSI Z89.1 EN 12492	HD Polypropylene	White	UNI	53/63
43 - 16955	WHE00083.396	ANSI Z89.1 EN 12492	HD Polypropylene	Green	UNI	53/63



43 - 16956



43 - 16952



43 - 16953



COMBO

43 - 16957



43 - 16958

Zenith X Air Safety Helmet from KASK

- Eight air intakes for exceptional breathability
- Integrated slots for attaching ear and face protection
- Lamp carrying clips
- Optimized top and side impact protection
- High tech quick drying comfort fabric



KASK

Rotary #	OEM	Standards	Material	Color	Size	cm
Zenith X Air						
43 - 16952	WHE00084.204	ANSI Z89.1 EN 12492	HD Polypropylene	Red		
43 - 16953	WHE00084.202	ANSI Z89.1 EN 12492	HD Polypropylene	Yellow		
43 - 16956	WHE00084.201	ANSI Z89.1 EN 12492	HD Polypropylene	White		
43 - 16958	WHE00084.210	ANSI Z89.1 EN 12492	HD Polypropylene	Black		
Zenith X Air Combo <i>includes earmuffs and metal mesh face shield</i>						
43 - 16957	WHE00086.221	ANSI Z89.1 EN 12492	HD Polypropylene	Fluorescent Yellow		



43 - 16942



43 - 16943



43 - 16944



43 - 16945


HI-VIZ

43 - 16946

Super Plasma Safety Helmet from KASK

- Ten intake vents designed to keep out debris
- Lamp carrying clips
- Attachment for fitting visors & earmuffs
- High tech quick drying comfort fabric


KASK

Rotary #	OEM	Standards	Material	Color	Size	cm
Super Plasma						
43 - 16942	WHE00036.201	ANSI Z89.1, CSA Z94.1 EN 12492	ABS	White	UNI	51/62
43 - 16943	WHE00036.210	ANSI Z89.1, CSA Z94.1 EN 12492	ABS	Black	UNI	51/62
43 - 16944	WHE00036.204	ANSI Z89.1, CSA Z94.1 EN 12492	ABS	Red	UNI	51/62
Super Plasma Hi Viz						
43 - 16945	WHE00037.224	ANSI Z89.1, CSA Z94.1 EN 12492	ABS	Fluorescent Lime	UNI	51/62
43 - 16946	WHE00037.201	ANSI Z89.1, CSA Z94.1 EN 12492	ABS	White	UNI	51/62

Helmet Visor from KONG

- Helmet Visor resistant to surface damage caused by fine particles and mist.
- Made of high-quality polycarbonate of Japanese origin.
- Extremely robust, it prevents from:
 - High-speed projection (120 m/s) of particles at room temperature (class B)
 - Ultraviolet radiation (smoked version only 997.056F)
- Available in transparent and smoked version.
- Conform to CE EN 166.



The included mounting kit can easily be assembled with Mouse, Spin and Leaf helmets thanks to the pre-marked holes in the shell.



Rotary #	OEM	Standards	Material	Color	g
43 - 16933	997056F00KK	EN 166	Polycarbonate	Smoked	80
43 - 16934	997056P00KK	EN 166	Polycarbonate	Transparent	80



Half Face Helmet Visor from KASK

Half face visor for Plasma, Super Plasma and HP helmets. Features anti-fog treatment, impact, abrasion and dust resistant. Compatible with glasses.



Rotary #	OEM	Standards	Material	Length	Color	g
43 - 16961	WVI00018.500	ANSI Z87+	Polycarbonate	4.3"	Transparent	80
43 - 16962	WVI00018.510	ANSI Z87+	Polycarbonate	4.3"	Smoked	80

Mesh Visor from KASK

Mesh visor for Plasma, Super Plasma and HP helmets. Hexagonal mesh provides good visibility and ventilation. Allows use of glasses. Requires visor carrier and attachment.


KASK


43 - 16963



43 - 16964

Rotary #	OEM	Standards	Length	g
Mesh Visor				
43 - 16963	WVI00006	EN 1732, ANSI Z87.1, CSA Z94.3	7.4"	42
Mesh Visor Carrier				
43 - 16964	WVI00005	-	-	-

Visor Carrier Attachment from KASK

Designed for integrating mesh full-face visors to Plasma, Super Plasma and HP helmets. 30mm


KASK


Rotary #	OEM
43 - 16965	WAC00008

Visor Screw Set from KASK

Designed for fastening Kask eye protection to Plasma, Super Plasma, and HP helmets.


KASK


Rotary #	OEM
43 - 16967	WAC00005

Full Face Visor for Zenith Helmet from KASK

The Kask Zen Full Face Visor for Kask Zenith Helmets feature a panoramic lens made from polycarbonate and treated for anti-fog and scratch resistance. This visor has an ergonomic, reinforced frame to protect your face from debris. To attach Zen Visors to your Zenith Helmet, you will need a Kask adapter set for Zenith Visors.



Rotary #	OEM	Standards	Material	Length	Color	g
43 - 16968	WVI00008.500	ANSI Z87+	Polycarbonate	7.4"	Transparent	120

Mesh Visor Kit for Zenith Helmet from KASK

The Zen Mesh visor by Kask is full-face protection for the Kask Zenith that is lightweight and durable. The Zen visor requires the Zenith Visor Adapters and the Zen Visor Carrier to fit the visor to the Zenith helmet (**not included**).



Rotary #	OEM	Standards	Material	Color	g
43 - 16969	WKI00012	ANSI Z87+, EN 166	Metal Mesh	Transparent	68

Zen Visor Brim Kit from KASK

Kask's Zen Visors are for use with Kask Zenith Helmets.

Rotary #	OEM
43 - 16976	WAC00007



Zenith Visor Kit from KASK

The Zen visor has a wide field of view and is anti-fog and scratch resistant for unmatched visibility while keeping you safe. The panoramic lens is also compatible for workers with prescription glasses and easily overlaps without interfering with glasses. The drip proof upper contour is made of rubber. The Zen visor also has a cut proof edge for added safety.



43 - 16970

43 - 16971

43 - 16972

43 - 16973


KASK

Rotary #	OEM	Standards	Material	Length	Color	g	Size
Zenith Visor Kit with adapters							
43 - 16970	WKI00002.500	ANSI Z87, EN 166	Polycarbonate	-	Clear	-	UNI
43 - 16971	WKI00002.510	ANSI Z87, EN 166	Polycarbonate	-	Smoke	-	UNI
Zenith Visor Only							
43 - 16972	WVI00007.500	ANSI Z87.1	Polycarbonate	4.3"	Clear	-	-
43 - 16973	WVI00007.510	ANSI Z87.1	Polycarbonate	4.3"	Smoke	-	-

Zen Visor Adapter from KASK

Visor adapters for easy click system. Designed to attach visors to Zenith helmets. Secures to visor attachment slots.

Rotary #	OEM
43 - 16974	WAC00009


KASK


Zenith Clear Full Visor Kit from KASK

(Zen FF visor + adapters + carrier+ peak)

Full face clear visor kit for Zenith helmet. Features anti-fog and scratch resistant treatment, cut proof edge and drip proof upper edge and drip proof upper contour. Can be used with glasses.

Rotary #	OEM	Standards	Material	Color	g	Size
43 - 16975	WKI00010.500	ANSI Z87, EN 166	Polycarbonate	Clear	120	UNI

KASK


Saddles from BUCKINGHAM

Saddles by Buckingham feature leather back pad material, 4 "D" rings, 5 accessory loops and tongue buckle style straps. Available in sizes Small- X Large.



Rotary #	OEM	Standards	Waist Size	Weight Capacity
43 - 16994	1371-S	ASTM F887	Small; 28" - 32"	350 lbs.
43 - 16995	1371-M	ASTM F887	Medium; 32" - 36"	350 lbs.
43 - 16996	1371-L	ASTM F887	Large; 36" - 40"	350 lbs.
43 - 16997	1371-X	ASTM F887	XLarge; 40" - 44"	350 lbs.



Buckcraft Saddle from BUCKINGHAM

Buckcraft saddle from Buckingham provides you with comfort and all the necessary features. Great saddle option for someone just entering the industry. Features specially designed leg pads that gives proper support, ensures proper blood flow and stays out of the groin area. Waist and leg strap quick connect buckle. Equipped with accessory snaps, rings, and gear loops. Suspension ring breaking strength is 23kN.



Rotary #	OEM	Standards	Waist Size	Weight Capacity
43 - 16998	17911-S	ASTM F887	Small; 28" - 32"	350 lbs.
43 - 16999	17911-M	ASTM F887	Medium; 32" - 36"	350 lbs.
43 - 17000	17911-L	ASTM F887	Large; 36" - 40"	350 lbs.
43 - 17001	17911-X	ASTM F887	XLarge; 40" - 44"	350 lbs.

Navigator Saddle from BUCKINGHAM

Navigator saddle from Buckingham is designed in conjunction with a team of Expert arborist. 100 + years of saddle R&D incorporated into this saddle. Features special air flow legs pads, injection molded rigid backpad for increased comfort, quick connect buckles and 14 points of attachment to maximize your options. This saddle is also equipped for use in a bucket.



Rotary #	OEM	Standards	Waist Size	Weight Capacity
43 - 17002	1470-S	ASTM F887	Small; 28" - 32"	350 lbs.
43 - 17003	1470-M	ASTM F887	Medium; 32" - 36"	350 lbs.
43 - 17004	1470-L	ASTM F887	Large; 36" - 40"	350 lbs.
43 - 17005	1470-X	ASTM F887	XLarge; 40" - 44"	350 lbs.

Chest Harness from BUCKINGHAM

The BuckTop RT Chest Harness can be used in conjunction with a saddle or as stand alone SRT chest harness. Features numerous connection points for personal preference, easy length/size adjustment, light weight breathable padding. BuckTop is not man rated and should never be used for Fall Arrest, Fall Restraint or Work Positioning.



Rotary #	OEM
43 - 17006	U6270



Harness-Lanyard Combo from BUCKINGHAM

The Buck Harness-Lanyard combo features Bucks new safety green webbing, H-Style harness, interlocking chest and leg buckles to ensure comfort and includes BuckYard Lanyard, a great value add-on. Rated 420 lbs. when used with equivalently rated accessories.



Rotary #	OEM	Standards	Weight Capacity	Length
43 - 17057	U64937Q6	ANSI Z359.11, Z359.13 ASTM F887-13 FOR ARC FLASH. OSHA 1926.954 (B) (1) (ii)	420 lbs.	4.5'

Shembiner Hook from BUCKINGHAM

The Shembiner is a versatile hook that can be used on your arborist saddle, climbing harness or just stick on your belt to hand a water bottle. The uses are endless.

Not for life support.



43 - 17116



43 - 17117

Rotary #	OEM	Material	Weight	Length	Width
43 - 17116	SHEMBINER	Anodized Aluminum	0.10 lbs.	4"	2.25"
43 - 17117	SHEMBINER XL	Anodized Aluminum	0.10 lbs.	4.75"	3"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Steel Tree Climber Kit from BUCKINGHAM

A steel tree climber paired with Buckingham's hook and loop cushion wrap pads that feature a cinch loop, allowing for maximum adjustability that ensures a proper fit. Now features Buckingham's patented GRIP technology that keeps the gaff pointed toward the heart of the pole, which reduces cutouts and maximizes comfort. The climbers are rated to 350 lbs. Dowel & Screw design allows for easy gaff change out.

Rotary #	OEM	Standards	Weight Rated	Stirrup Width	Gaff Length
Steel Tree Climber Kit					
43 - 17010	SBG95K1V-BL	ASTM F887	350 lbs.	4-1/2"	2-1/4"



Replacement Gaff from BUCKINGHAM

Replacement Gaffs for Buckingham Steel and Titanium Climbers. This is a hybrid dowel and screw 16 degree, 2-1/4" long steel gaff for use on pole or tree climbers. Used on Rotary 17010. Comes with attachment screws and wrench.

Rotary #	OEM	Length
43 - 17095	NBG9306	2.25"



Aluminum Tree Climber Kit from BUCKINGHAM

A aluminum tree climber paired with Black hook and loop fastener climber straps. Now features Buckingham's patented GRIP technology that keeps the gaff pointed toward the heart of the pole, which reduces cutouts and maximizes comfort. The climbers are rated to 350 lbs. Dowel & Screw design allows for easy gaff change out. Lightest aluminum climber available. Foot strap offers an increased surface area to added comfort to the top and back of the foot. Comes with Hi-Vis magnetic gaff guards.

Rotary #	OEM	Standards	Weight Rated	Stirrup Width	Gaff Length
Aluminum Tree Climber Kit					
43 - 17012	A95K1V-BL	ASTM F887	350 lbs.	4-1/2"	2-7/16"



Replacement Gaff from BUCKINGHAM

Replacement Gaffs for Buckingham Aluminum Climbers. This is a hybrid dowel and screw 16 degree, 2-7/16" long gaff. Used on Rotary 17012. Comes with attachment screws and wrench.

Rotary #	OEM	Length
43 - 17096	A9306	2.4375"



Magnetic Gaff Guards from BUCKINGHAM



Magnetic gaff guards feature a strong magnet that keeps the guards securely attached to all manufacturers pole and tree gaffs. Hi-vi green makes it easy to find in the field.

Rotary #	OEM	Length	Width
43 - 17015	6909M2	1.5"	1"



Retractable Gaff Guards from BUCKINGHAM

Retractable gaff guards were developed so you never have to worry about losing a gaff guard again. Features a strong magnet that keeps the guards securely attached to all manufacturers pole and tree gaffs. When you are ready to climb, kick the gaff guards off and they will retract automatically.



Rotary #	OEM	Length	Width
43 - 17016	6911	2.5"	2.5"



Steel Tree Climber with Foot Straps from BUCKINGHAM

A steel tree climber that has a contoured shank, offset stirrup, and dowel & screw style replaceable gaff. The climbers are rated to 350 lbs. and exceeds ASTM F887 standards.

Rotary #	OEM	Standards	Weight Rated	Stirrup Width	Gaff Length
43 - 17011	SB95089	ASTM F887	350 lbs.	4-1/2"	2-13/16"



Econo Climber Pads from BUCKINGHAM

Set of two econo climber pads. Fits our 17011 steel climber "L" shaped leather climber pads with 3/4" padding and outer loops for leg straps

Rotary #	OEM	Length	Width
43 - 17182	3122	8"	4"



Two Piece Nylon Foot Straps from BUCKINGHAM

Set of two, two piece nylon foot straps with split ring. Two piece strap is permanently attached to stirrup ring.



Rotary #	OEM	Length	Width
43 - 17017	21391	28"	1"



Climber Pad Straps from BUCKINGHAM

Set of two leg straps from our 17182 econo climber pads. Secures pad to our 17011 steel climber. Made of impregnated nylon.



Rotary #	OEM	Length	Width
43 - 17183	2239	22"	1"





Rope Bag from KONG

This Rope Bag has a drawstring closure along with a rapid nylon clip to secure the storage compartment. The PVC construction of this bag features a reinforced bottom with perforations for maximum breathability. Can store rope up to 200m (656') of 11 mm (.433") rope in its 43 liters capacity storage compartment. It has transparent pocket for name plate label and an interior pocket with zip closure for keeping tools. Equipped with padded shoulder straps and angled closure flap.

Rotary #	OEM	Material	Color	Capacity
43 - 16932	982502000NK	PVC	Black	43 L



BuckPack Pro Gear Bag from BUCKINGHAM

BuckPack Pro Gear Bag with removable gear garage for hardware and devices. Constructed from heavy-duty waterproof vinyl and cordura material with High-Grade zippers. Numerous storage and access options. 32" Height, 14" Width, 12" depth.

Rotary #	OEM	Color
43 - 17018	4378	Black, Green



RopePro Deluxe Bag from BUCKINGHAM

RopePro Deluxe can hold up to 500' of 1/2" rope. Features web loops for tool holsters and extra carabiners. Equipped with seven exterior pockets. Great for helmet and saddle storage as well. Made of water resistant canvas.

Rotary #	OEM	Color
43 - 17019	4373	Black, Green



Throwing Bag from KONG

Accessories for rope throwing.
Two versions of throwing bag, 200 g and 350 g.

Rotary #	OEM	Color	m	g / oz.
43 - 16902	224000000KK	Red	-	350/12.3
43 - 16903	224010000KK	Orange	-	200/7.05



Vinyl Throwbag from BUCKINGHAM

A Buckingham throw bag with a tight, aerodynamic design. Manufactured in the USA from a durable vinyl/TNX material. The throw bag features heavy nylon stitching and is reinforced with two rows of stitching. High-quality nickel plated 1" ring.

Rotary #	OEM	Ring Size	Weight	Color
Vinyl Throwbag				
43 - 17053	16-10Y	1"	10 oz.	Yellow
43 - 17054	16-16O	1"	16 oz.	Orange



Tear Drop Throwbag from BUCKINGHAM

A Buckingham throw bag with a tight, aerodynamic design with all seams reinforced with two rows of stitching. The specific "teardrop" shape allows the bag to fly much more efficiently and provides a more accurate throw for setting you line.

Rotary #	OEM	Ring Size	Weight	Color
Tear Drop Throwbag				
43 - 17041	16A1-12G	1"	12 oz.	Green
43 - 16922	16A1-14G	1"	14 oz.	Green
43 - 17042	16A1-16G	1"	16 oz.	Green



Zing-It Throw Line from BUCKINGHAM

Zing-It throw line to be used with throwing bags.

Rotary #	OEM	Length	Line Dia	Color
Throw Line				
43 - 17055	17Z2Q1-180	180'	.086"	Yellow



BuckLaunch Sling Shot from BUCKINGHAM

The BuckLaunch was specially developed to give you the ability to safely launch throw weights in an efficient, accurate, and safe manner. We know how tough it can be to accurately get your line into the canopy, especially when using the hand tossing method. Heights over 100' can be achieved in a safe and accurate manner. Pole length is 4' with extension.



Rotary #	OEM	Head Length	Head Width	Pole Length
BuckLauch Sling Shot				
43 - 17045	1027G	4"	9"	4'
Replacement Tubing for BuckLaunch				
43 - 17046	1027GS	-	-	-



Throw Bag Launcher from JAMESON

Big Shot Throw Bag Launcher with poles. Big shot head with 4' FG base pole and 4' FG extension pole. Big shot snaps into pole's ferrule to launch throw bag & line over limbs. Delivers line up to 150'.



Rotary #	Pole Type	OEM
43 - 17069	THROW BAG LAUNCHER	FG-BS-KIT1



This product is not REACH compliant and cannot be sold outside the USA.

Logger Measuring Tape from ARCHER

Logger measuring tape features fully automatic gear drive tape, hardened steel and pinion, fast automatic return, strong aluminum case and open spool. Black graduations on yellow background and quick release nail attachment.

Rotary #	OEM	Length
Measuring Tape		
43 - 17104	A110	50"
Refill		
43 - 17105	A1121	50"



BuckCarrier Chainsaw Carrier from BUCKINGHAM

Is a light-weight (2.4 oz.) aluminum carrier designed to store your chainsaw on your saddle. It is the lowest profile chainsaw hook on the market and its compact design makes it nearly impossible to get caught on limbs and branches like other chainsaw carriers on the market. Can be used to carry practically anything. Fits most popular saddles currently on the market. Made of aluminum.

Rotary #	OEM	Length	Width	Depth
43 - 17037	2402B	4-1/2"	3/4"	1-3/4"



BuckCarrier Chainsaw Carrier Kit from BUCKINGHAM

Is a light-weight (2.4 oz.) aluminum carrier designed to store your chainsaw on your saddle. Features Buck 2402B carrier paired with a 1" nylon strap that measures 8" in length and may be girth hitched up to a 3" strap. It is the lowest profile chainsaw hook on the market and its compact design makes it nearly impossible to get caught on limbs and branches like other chainsaw carriers on the market. Can be used to carry practically anything. Fits most popular saddles currently on the market. Made of aluminum.

Rotary #	OEM	Length	Width	Depth
43 - 17038	2402BQ1	4-1/2"	3/4"	1-3/4"



Blood Stopper Kit from BUCKINGHAM

Kit contains one large blood stopper to control bleeding until the victim can be administered First Aid on the ground. These are new and improved versions of the blood stopper kit. Kit has the convenience of two separate attachment types. Can easily be clipped to any accessory snap or gear loops on the saddle/belt.

Rotary #	OEM	Length	Width	Color
Blood Stopper Kit				
43 - 17047	4600G9N53	5-1/2"	3-1/2"	Green, Black



PUTTING IT TOGETHER

Customize Poles and Accessories

- Choose your tool head (pruner, pole saw or accessory)
- Attach tool head to pole's female ferrule with adapter
- For additional length, attach extension pole(s)



PRUNER
ADAPTER



For highest performance and safety, we recommend using a Base Pole when using one pole or starting with a Base Pole when working with multiple poles.



SAW HEAD POLE
With male ferrule and permanently mounted saw head for attaching saw blade

EXTENSION POLE
With male & female ferrules for additional length


BASE POLE
With rubber end cap and female ferrule provides solid foundation

POLE CONFIGURATIONS

BASE POLE - we recommend starting with a Base Pole.

Extension Pole provides additional length, extending workable height.

Saw Head Pole is for use with Saw Blade.

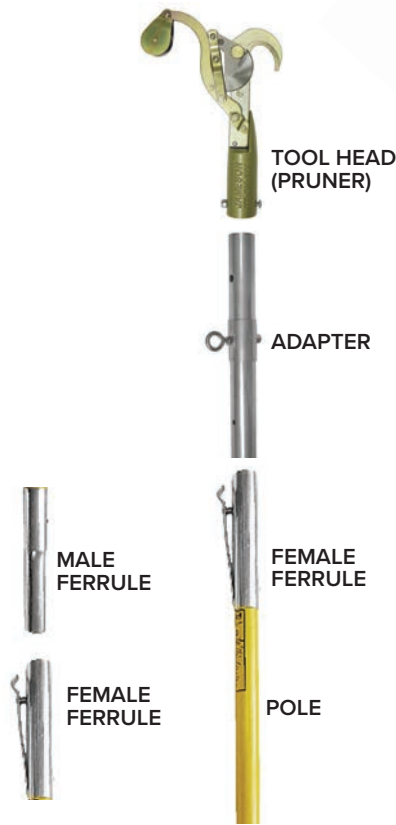

TOOL HEAD (PRUNER)

ADAPTER

MALE FERRULE

FEMALE FERRULE

FEMALE FERRULE

POLE

ADAPTER & FERRULE SYSTEM

Makes it easy to change from pruner head to pole saw head or pole lengths of 4' to 12'. An exterior leaf spring locking button on ferrule offers a strong connection, whether attaching poles or tool heads.

This versatility saves time and money in the field.



SAW BLADE

SAW HEAD

SAW BLADE

SAW HEAD POLE

SAW HEAD POLE SET UP

Use saw blade with Saw Head Pole or use Pole Saw Head with Extension Pole.

We recommend using Saw Head Poles with Base Poles.



EXTENSION POLE

BASE POLE

FG Hollow Core Poles from JAMESON

Preferred for tree trimming and aerial construction. Jameson's strongest and most popular pole. Offering greater control and exceptional bending strength. Polymer protective surface veil prevents fiber blooming at the surface due to abrasion or UV light. The aluminum female ferrule is strong and lightweight solution without sacrificing control or bending strength.

Not a "Hot Stick" - Not for use on energized lines.
Made in the USA.



Rotary #	Pole Type	OEM	Length	Wall Thickness	Pole Dia.	Weight	Color
43 - 17065	BASE	FG-6F	6' ft	.125"	1.25"		Yellow
43 - 17064	EXTENSION	FG-6	6' ft	.125"	1.25"	2.4 lbs	Yellow
43 - 17068	SAW HEAD POLE USES OUR 43-17085, 43-17086, 43-17087 & 43-17129 SAW BLADES	FG-6SFP	6' ft	.125"	1.25"		Yellow

This product is not REACH compliant and cannot be sold outside the USA.



43-17068



43-17065 43-17064

LG Hollow Core Poles from JAMESON

Economical pole for landscapers and homeowners. Lightweight, versatile. Polymer protective surface veil prevents fiber blooming at the surface due to abrasion or UV light.

Not a "Hot Stick" - Not for use on energized lines.
Made in the USA.



Rotary #	Pole Type	OEM	Length	Wall Thickness	Pole Dia.	Weight	Color
43 - 17076	BASE	LS-6F	6' ft	.100"	1.25"		Green
43 - 17075	EXTENSION	LS-6	6' ft	.100"	1.25"	1.9 lbs	Green
43 - 17079	SAW HEAD POLE USES OUR 43-17085, 43-17086, 43-17087 & 43-17129 SAW BLADES	LS-6SFP	6' ft	.100"	1.25"		Green


This product is not REACH compliant and cannot be sold outside the USA.



43-17079



43-17075 43-17076

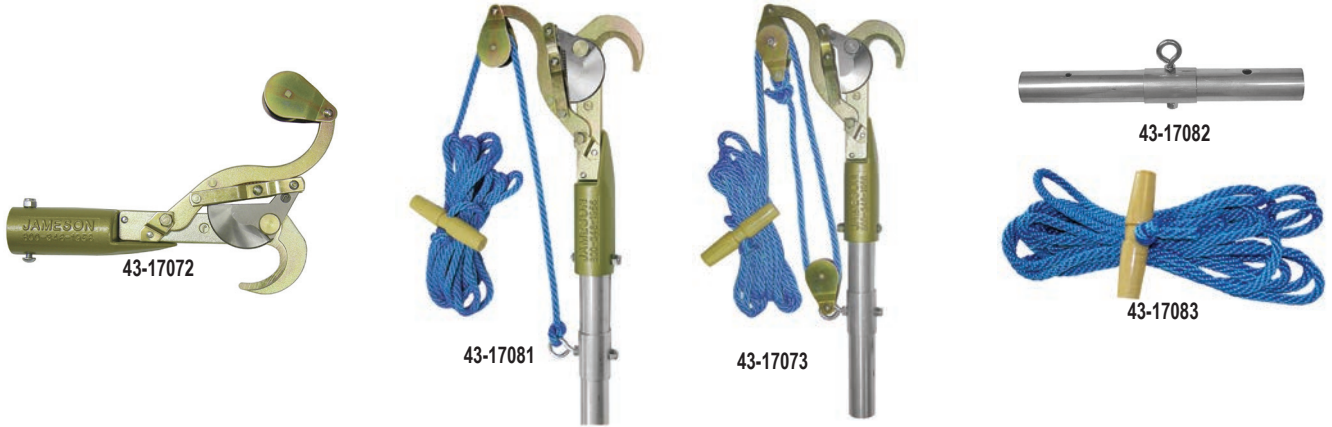

JA Side-Cut Pruners from JAMESON

JA Pruners feature a removable upper spring pin and blade bolt for easy blade replacement and sharpening. Forged steel components for added strength, Enhanced spring for smoother cutting action. Raised hook edge reduces blade drag.



Rotary #	Pole Type	OEM	Cutting Capacity
43 - 17072	FIXED PULLEY PRUNER. USES OUR 17082 ADAPTER & 17083 ROPE WITH HANDLE	JA-14	1.25"
43 - 17081	PRUNER, ADAPTER & ROPE.	PH-14-PKG	1.25"
43 - 17073	HD DOUBLE PULLEY PRUNER, ADAPTER & ROPE	JA-14DP-PKG	1.25"
43 - 17082	PRUNER ADAPTER. ADAPTS TO OUR 17072 PRUNER TO POLE.	PHA-14	
43 - 17083	PRUNER ROPE WITH HANDLE. 5/16" X 20'	PR-20	

This product is not REACH compliant and cannot be sold outside the USA.

JA-34 Big Mouth Side-Cut Pruners from JAMESON

For Professional Arborists. The Jameson Big Mouth Pruner has a 1.75" cutting capacity for larger limbs. Like JA-14 Pruners, the Big Mouth Pruners feature a removable upper spring pin and blade bolt for easy blade replacement and sharpening.



Rotary #	Pole Type	OEM	Cutting Capacity
43 - 17074	PRUNER, ADAPTER & ROPE.	JA-34DP-PKG	1.75"



This product is not REACH compliant and cannot be sold outside the USA.



POLE & TOOL COMBOS FROM JAMESON

A variety of combinations make it easy to find the best fit for your tree trimming job. Adapters allow user to switch from pruner head or pole saw quickly and easily without tools, using the same pole. Kits are available with pole adapters or permanently mounted (fixed) tool heads.



43-17077



43-17078

LS Landscape Kits

Ferrule and adapters to use different pole tools




Rotary #	Kit Type	OEM
43 - 17077	JA-14DP PRUNER, ADAPTER & ROPE OUR 17073, PS-3FP POLE SAW HEAD OUR 17084, 13" TRI-CUT BLADES (SB-13TE) OUR 17085, 6' LS BASE POLE OUR 17076 AND 6' LS EXTENSION POLE OUR 17075.	LS-6PKG-5
43 - 17078	16" TRI-CUT SAW BLADE (SB-16TE) OUR 17086, 6' LS SAW HEAD POLE OUR 17079 WITH PS-3FP HEAD, 6' LS BASE POLE OUR 17076 AND 6' LS EXTENSION POLE OUR 17075.	LS-6PKG-6

This product is not REACH compliant and cannot be sold outside the USA.



43-17066

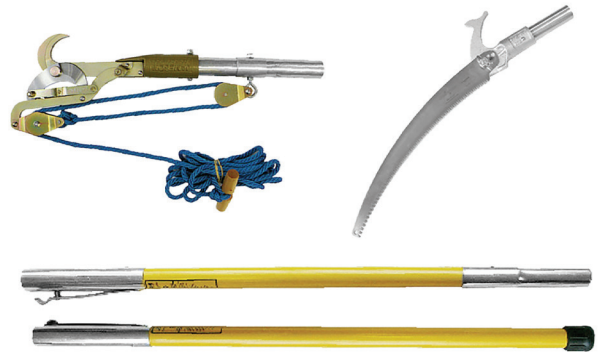

43-17067

FG Hollow Core Pole Kits

Ferrule and adapters to use different pole tools



Rotary #	Kit Type	OEM
43 - 17066	JA-14 PRUNER WITH ADAPTER & PRUNER ROPE OUR 17081, 13" TRI-CUT SAW BLADE OUR 17085, SAW HEAD OUR 17068, 6' FG EXTENSION POLE OUR 17064, 6' FG BASE POLE OUR 17065	FG-6PKG-1
43 - 17067	JA-34DP BIG MOUTH DOUBLE PULLEY PRUNER, ADAPTER, ROPE OUR 17074, PS-3FP POLE SAW HEAD OUR 17084, 16" TRI-CUT BLADE OUR 17086, 6' FG EXTENSION POLE OUR 17064, 6' FG BASE POLE OUR 17065.	FG-6PKG-7

This product is not REACH compliant and cannot be sold outside the USA.

Pole Saw & Hand Saw Blades from JAMESON

Jameson's line of conventional 16" saw blades have long been an industry standard with telecommunication companies for line clearance.

Expanding product line to meet the demands of professional arborists, Jameson introduced Barracuda Tri-Cut saw blades.

Hard-chrome plated with impulse hardened teeth, tri-cut blades provide a quicker, cleaner cut with less wear on the blade than traditional blades.



Rotary #	Description	OEM	Size
43 - 17085	BARRACUDA TRI-CUT SAW BLADE	SB-13TE	13"
43 - 17087	BARRACUDA TRI-CUT SAW BLADE WITH HOOK. HOOK PREVENTS SLIPPING OFF OR PULLING OUT OF CUT; PULLS SMALL BRANCHES OR VINES	SB-13TE-H	13"
43 - 17086	BARRACUDA TRI-CUT SAW BLADE	SB-16TE	16"
43 - 17129	BARRACUDA TRI-CUT SAW BLADE WITH HOOK. SHARPENED UPPER HOOK PREVENTS PULLING OUT OF CUT AND QUICKLY REMOVES SUCKERS OR VINES. SHARPENED LOWER HOOK SCORES BARK BELOW CUT TO PREVENT RIPPING DAMAGE TO BRANCH COLLAR. FITS JAMESON POLE SAW HEADS. DOES NOT FIT HAND SAW HANDLE.	SB-16TE-DH	16"

This product is not REACH compliant and cannot be sold outside the USA.

Saw Heads & Kits from JAMESON

The Pole Saw Head snaps into Jameson pole ferrules and fits Jameson saw blades.

Low profile design maneuvers easily in dense foliage. Convenient hook pulls loose limbs and branches free.

Not For Use On Or Near Live Wires.



Rotary #	Description	OEM	Size
43 - 17084	POLE SAW HEAD. CENTER BLADE MOUNT; MOUNTING PIN FOR EASY BLADE REPLACEMENT WITHOUT TOOLS. SNAPS INTO POLE. FITS SB-1C SAW BLADE AND ALL BARRACUDA TRI-CUT SAW BLADES. WILL ACCEPT OUR 17085, 17086, 17087 & 17129 SAW BLADES	PS-3FP	
43 - 17128	POLE SAW BLADE KIT WITH SCABBARD. INCLUDES POLE SAW HEAD, SAW BLADE AND LEATHER SCABBARD. WILL ACCEPT OUR 17085, 17086, 17087, 17129 SAW BLADES	PS-3FPK	13"
43 - 17126	POLE SAW SCABBARD. LEATHER POLE SAW SCABBARD FOR JAMESON POLE SAWS. PROTECTS BOTH THE USER AND THE SAW BLADE. FITS BOTH 13" & 16" POLE SAW BLADES	SB-16TE	13" & 16"

This product is not REACH compliant and cannot be sold outside the USA.

Tri-Cut Edge Hand Saws from JAMESON

Featuring Barracuda impulse hardened tri-cut teeth. Jameson hand saws provide an efficient and clean cut. Available with wooden or ergonomic handle with index finger stop for safety and opening for lanyard line. Handles feature two bolts for easy blade replacement.



43-17071 / 43-17131



43-17125 / 43-17127



Rotary #	Description	OEM	Size	Size
43 - 17071	BARRACUDA TRI-CUT HAND SAW WITH ORANGE ERGONOMIC SOFT GRIP HANDLE. WITH SCABBARD. WILL ACCEPT OUR 17085, 17086 & 17087 SAW BLADES	HS-13TE-OS	13"	13"
43 - 17131	BARRACUDA TRI-CUT HAND SAW WITH ORANGE ERGONOMIC SOFT GRIP HANDLE. WILL ACCEPT OUR 17085, 17086 & 17087 SAW BLADES	HS-16TE-O	16"	16"
43 - 17125	LEATHER SCABBARD FOR 13" HAND SAW. PROTECTS BOTH THE USER AND THE SAW BLADE.	HS-13SL	13"	13"
43 - 17127	LEATHER SCABBARD FOR 16" HAND SAW. PROTECTS BOTH THE USER AND THE SAW BLADE.	HS-16SL	16"	16"

This product is not REACH compliant and cannot be sold outside the USA.



43-17070



43-17080



Rotary #	Description	OEM	Size
43 - 17070	TRI-CUT HAND SAW WITH SCABBARD. INCLUDES A DURABLE, HARD PLASTIC SCABBARD. DESIGNED FOR THE PROFESSIONAL ARBORIST, IT OFFERS EXCEPTIONAL CUTTING PERFORMANCE WITH OPTIONS TO SECURE ON LEG OR SADDLE. CUTS BRANCHES UP TO 8" DIAMETER. IMPULSE HARDENED TEETH HOLD EDGE LONGER AND OFFER SMOOTH CUTTING ACTION.	HS-13TE-LPS	13"
43 - 17080	VELCRO LEG STRAPS (SET OF 2) FOR 13" BARRACUDA TRI-CUT PRUNING SAW WITH HARD SCABBARD. SET OF 2 CINCH STRAPS, 1.5" X 36", BLACK NYLON WEBBING WITH VELCRO CLOSURE.	LS-36-2	

This product is not REACH compliant and cannot be sold outside the USA.

Hand Lopper from JAMESON

The Jameson Hand Garden Lopper is the perfect addition to your gardening tool collection. This hand garden lopper features a 3" steel blade for durability and a 21.5" handle for comfortable grip. The garden lopper also includes 1-5/8" cutting capacity for precision.



Rotary #	Pole Type	OEM
43 - 17124	HAND GARDEN LOPPER	HL-BP200



This product is not REACH compliant and cannot be sold outside the USA.

Throw Bag Launcher from JAMESON

Big Shot Throw Bag Launcher with poles. Big shot head with 4' FG base pole and 4' FG extension pole. Big shot snaps into pole's ferrule to launch throw bag & line over limbs. Delivers line up to 150'.



Rotary #	Pole Type	OEM
43 - 17069	THROW BAG LAUNCHER	FG-BS-KIT1



This product is not REACH compliant and cannot be sold outside the USA.