

- Materials, heat resistance
- HVAC fan efficiency
- Filtering system
- Power Supply System
- Experience, EZ to use
- Capacity
- Price






Materials, heat resistance – the Smartbox is made of sandwich panels




HVAC efficiency

Fan door

- Fan door is easily accessible for maintenance
- Each Fan air flow is 13 000 ft3/minute
- Fan section is operated separately and is connected to frequency regulator
- fan consumption 1 KW/h
- Fan sound level 64 dB

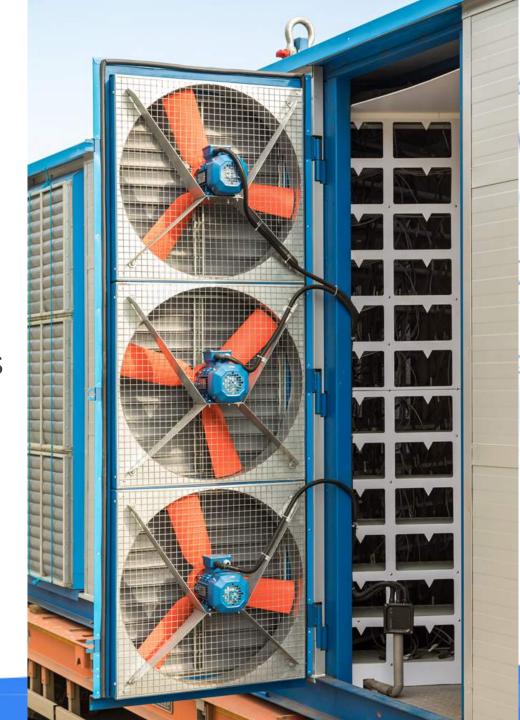



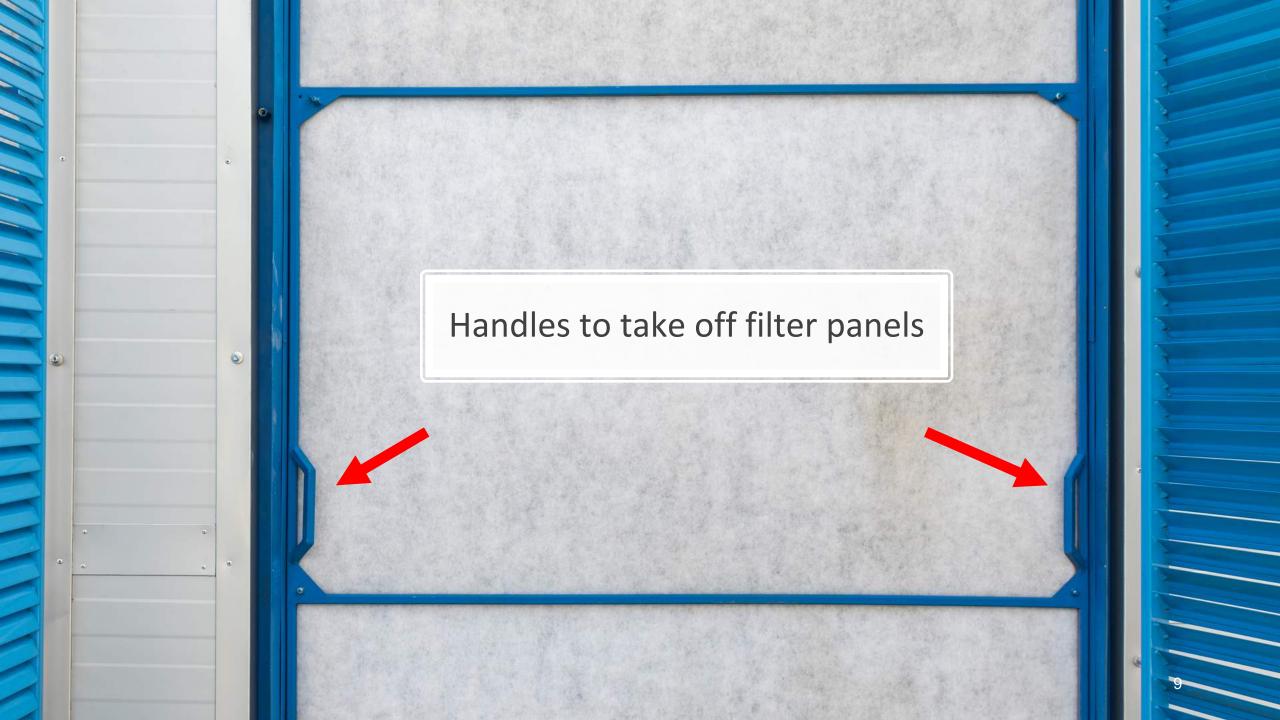





Electrical room

Secured & raised platforms provide shock protection from power lines and safe access to main breakers without extra ladders





- Every miner has dedicated
 Ethernet connection and surge protected power cables.
- Electrical infrastructure is designed to run Antminer S17 S19 type miners
- The floor is covered completely with rubber to protect from electric shock

