

INFLUX FIRESURE AND FIRESURE X


Flowmeters for sprinkler systems



Firesure



LPS 1045: Issue 1
Cert No. 464a

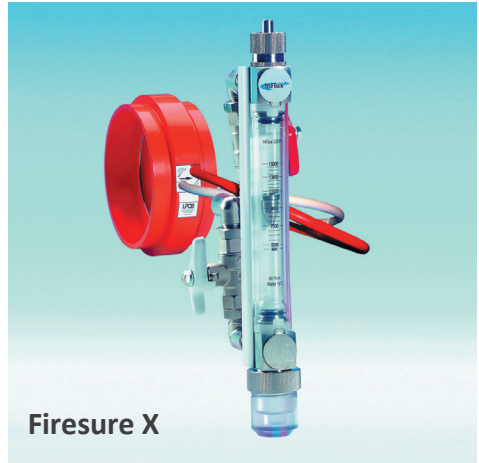

Firesure X

Flange and groove style connection

Simple and quick to install

Horizontal or vertical pipelines

Direct or remote indicator


Certificated to LPS 1045

Size & connection	Firesure close coupled		Firesure X remote coupled.	
	dm ³ /min	LPCB ref.	dm ³ /min	LPCB ref.
50 Flange	150 to 700	464a/01	200 to 850	464a/11
80 Flange	300 to 1600	464a/02	200 to 1800	464a/12
100 Flange	500 to 3500	464a/03	400 to 4000	464a/13
150 Flange	900 to 7900	464a/04	1100 to 9500	464a/14
200 Flange	2000 to 15000	464a/05	2500 to 17000	464a/15
50 Groove	150 to 700	464a/06	200 to 850	464a/16
80 Groove	300 to 1600	464a/07	200 to 1800	464a/17
100 Groove	500 to 3500	464a/08	400 to 4000	464a/18
150 Groove	900 to 7900	464a/09	1100 to 9500	464a/19
200 Groove	2000 to 15000	464a/10	2500 to 17000	464a/20



A wide range of low flowrate meters for monitoring, controlling and visualisation in sampling, blending, dosing, aeration, cooling and laboratory use.

Flowmeters suitable for high flowrate measurement and control in process flows, water treatment and gas furnace applications.

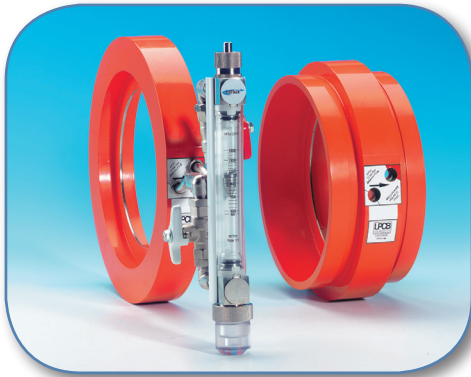

The Firesure range of meters approved for the testing of automatic sprinkler installations in buildings.

Influx Measurements Ltd.

1a Bennett House
The Dean
Alresford
SO24 9BQ
Phone: +44 (0)1962 736736
Fax: +44 (0)1962 736737
E-mail: sales@influxmeasurements.com



Assessed to ISO 9001:2008
LPCB Cert No. 464