

Spa24 Speaker

Install Guide


Thank you for choosing this PQN Audio product.

For almost 20 years PQN Audio has been supplying worldwide customers with innovative audio products.

While this product is designed to be waterproof & chemical resistant, care must be taken to assure years of performance and not voiding the warranty. Improper installation & overuse of caustic spa sanitizing chemicals and ozone will eventually compromise material integrity. Prolonged extreme high volumes will also lead to failures of all audio products.

Please read the following to become more familiar with install requirements.

- 1- Find a location which allows speaker to lay flat
- 2- Use template for approximate spacing
- 3- Mark and cut a ~2.5" mounting hole
- 4- Position speaker in hole
- 5- Feed speaker wires thru nut prior to attaching speaker wires
- 6- Connect (+) speaker to large tab / (-) speaker wire to small tab
- 7- Apply small amount of non-caustic silicone to rear of gasket
- 8- Apply small amount of non-caustic silicone to flange of nut
- 9-Tighten wall-fitting nut firmly and securely. DO NOT overtighten.
- 10 - When replacing older speakers, assure that remaining sealants are removed & surfaces are thoroughly cleaned prior to new installation.

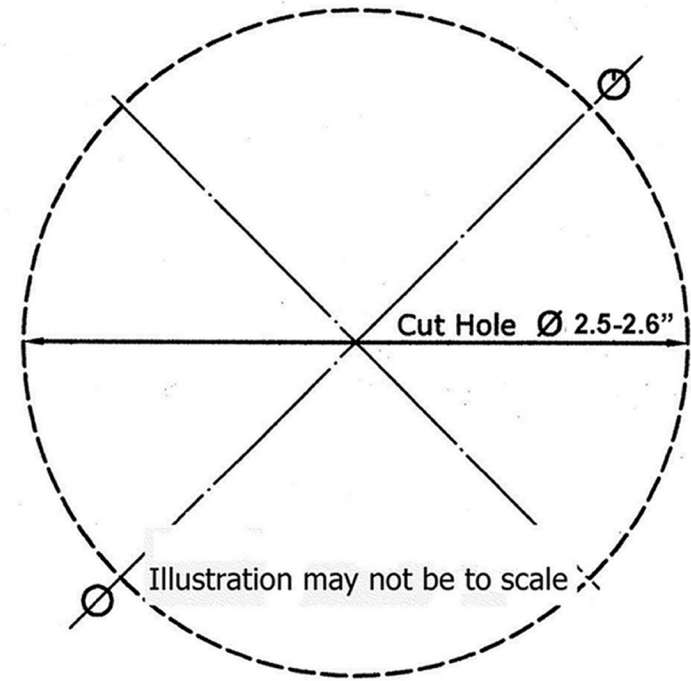

Trouble Shooting Guidelines

- 1- Water leaks: * make sure that surface is flat
* make sure nut is tightened
* use a small bead of silicone under gasket
- 2- No sound: * all connections/connectors/wires are secure
* assure that amp source is properly functional
* assure that (+) / (-) from amp source corresponds to proper speaker terminals

NOTE: When Using Silicone Sealant Do Not Allow Any To Make Contact With Speaker Cone

NOTE: While PQN speakers are made to provide years of service, please follow mgf instructions for chemical care of your hot tub. Excessive chemical use/abuse will harm the speakers, shorten usage & void warranty.

NOTE: Make sure speakers are matched to amp source power outputs (Watts / Impedance). Do Not over-amp.



Morro Bay, CA 93442
805.794.6475
www.pqnaudio.com

Warranty Policy

PQN Audio products are warranted to be free of manufacturing defects for a period of one (1) year. Warranty is subject to proper installation & application. Warranty does not cover exposure to excessive chemical usage or operational abuse. Return defective product prepaid to point of purchase for replacement or refund as determined by PQN. Warranty is not transferable. Proof of Purchase must be included.

PQN is not responsible for speaker failure caused by defects/misuse/mfg issues of other amp/subwoofer products.

Specifications

Power: 30WMax

Imp: 4

Wt. <1#

Mounted Depth: 1.85"

IP65

