
Spa34 Speaker Install Guide

Thank you for choosing this PQN Audio product. For almost 20 years PQN Audio has been supplying worldwide customers with innovative audio products. While this product is designed to be waterproof / chemical resistant, care must be taken to provide years of performance and not void warranty. Improper installation & over use of caustic spa / cleaning chemicals / ozone will eventually compromise material integrity. Prolonged overamping at high volumes will also cause failures of all audio products.

- 1- Find a location which allows speaker to lay flat
- 2- Use template for approximate spacing
- 3- Mark and cut a ~3.25" mounting hole
- 4- Position speaker in hole
- 5- Feed speaker wires thru nut prior to attaching speaker wires
- 6- Connect (+) speaker to large tab / (-) speaker wire to small tab
- 7- Apply small amount of non-caustic silicone to rear of gasket
- 8- Apply small amount of non-caustic silicone to flange of nut
- 9-Tighten wall-fitting nut firmly and securely. DO NOT overtighten.
- 10 When replacing older speakers, assure that remaining sealants are removed & surfaces are thoroughly cleaned prior to new installation.

Trouble Shooting Guidelines

- 1- Water leaks: * make sure that surface is flat
 - * make sure nut is tightened
 - * use a small bead of silicone under gasket
- 2- No sound: * all connections/connectors/wires are secure
 - * assure that amp source is properly functional
 - * assure that (+) / (-) from amp source corresponds to proper speaker terminals

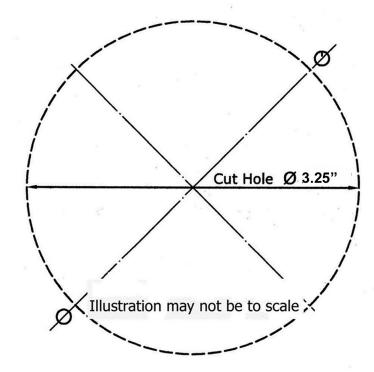

NOTE: When Using Silicone Sealant Do Not Allow Any To Make Contact With Speaker Cone

NOTE: While PQN speakers are made to provide years of service, please follow mgf instructions for chemical care of your hot tub. Excessive chemical use/abuse will harm the speakers, shorten usage & void warranty.

NOTE: Make sure speakers are matched to amp source power outputs (Watts / Impedance). Do Not over-amp.

Specifications
Power: 50WMax
Imp: 4 ohm
Wt. <1#
Mounted Depth: 1.5"
IP65 / REACH / RoHS / CE





PQN Audio products are warrantied to be free of manufacturing defects for a period of one (1) year. Warranty is subject to proper installation & application. Warranty does not cover exposure to excessive chemical usage or operational abuse. Return defective product prepaid to point of purchase for replacement or refund as determined by PQN. Warranty is not transferable. Proof of Purchase must be included.

