FALL PROTECTION

Fall Protection

Body Harness

SFH-01

Basic range of Full Body Harness Perfect for Suspension Work with Light & Medium Risk Use. Light Weight Economical & Certified.

FEATURES

- Dorsal D-Rings for Attachments
- Adjustable Thigh & Chest Straps
- Ideally Positioned Pelvic Strap for Extended use Comfort
- **COLOR -** Orange/Black

IS 3521:2021. CLASS A.
BIS LIC NO. CM/L 5100090478

CE EN 361:2002

WEBBING	D-RINGS	BUCKLES	STITCHING	LOOPS & PLATES
Synthetic Fiber. 44mm Width.	8mm Forged Zinc Plated	Set of Big & Small. 4mm. Zinc Plated.	High Tenacity Nylon Thread.	Made of LDPE Material.
Webbing, D-Rings & Buckles - Breaking Strength >25KN			For Flexibility, Strength & Durability.	

Common Specifications For The Series

PRODUCT SERIES OPTIONS

MODEL NO	OPTION	FEATURE DIFFERENCES	APPROVALS
SFH-02		D-Rings at Abdominal Point. Recommended over SFH-01 for Controlled Descend.	IS 3521:1999. CLASS D.
SFH-03		Two D-Rings at Shoulder Strap. Ideal for Entry & Exit Control into Confined Spaces & Rescue.	IS 3521:1999. CLASS E.
SFH-04		Adjustable Shoulder Straps with Dual Webbing Loops at the Chest Level. Webbing Loops are connected with a Carabiner. The Carabiner connects the D-Ring fitted with Double Lanyard along with Scaffold Hooks.	IS 3521:1999. CLASS L.
SFH-05		Two D-Rings at Waist/Hip. Ideal for Work Positioning.	IS 3521:1999. CLASS P.

Fall Protection

Body Harness

SFH-103

Premium Range of Full Body Harness Perfect For Suspension Work of Light & Medium Risk Use. Light Weight & Certified.

FEATURES

- Dorsal D-Rings for Attachments
- Dual D-Rings at Chest Level
- Ideally Positioned Pelvic Strap for Extended use Comfort
- **COLOR -** Black/Orange

IS 3521:2021. CLASS L.
BIS LIC NO. CM/L 5100090478

EN 361:2002

WEBBING	D-RINGS	BUCKLES	STITCHING	LOOPS & PLATES
Synthetic Fiber. 44mm Width.	8mm Forged Zinc Plated	Set of Big & Small. 4mm. Zinc Plated.	High Tenacity Nylon Thread.	Made of LDPE Material.
Webbing, D-Rings & Buckles - Breaking Strength >25KN			For Flexibility, Strength & Durability.	

Common Specifications For The Series

PRODUCT SERIES OPTIONS

MODEL NO	OPTION	FEATURE DIFFERENCES	APPROVALS
SFH-101		Dorsal D-Rings for Fall Arrester Compatibility. Fully Adjustable Chest & Shoulder Straps for Perfect Fit.	IS 3521:1999. CLASS A.
SFH-102		Dual D-Rings at Chest Point For Optimal Control During Descend. Compatible with Fall Arrester System.	IS 3521:1999. CLASS L.
SFH-104		Dorsal D-Rings for Fall Arrester Compatibility. Dual Webbing Loops at Chest Point for Attachment.	IS 3521:1999. CLASS L.
SFH-106		Integrated with Positioning Waist Belt When With 2 Lateral D-Rings. Ideal for Tower & Pole Jobs with Fall Arrester.	IS 3521:1999. CLASS E.

Fall Protection

Body Harness

SFH-105

Premium Range of Full Body Harness Perfect For Suspension Work of Light & Medium Risk Use. Light Weight & Certified.

FEATURES

- Dorsal D-Rings for Attachments
- One D-Ring At Sternal Point
- Ideally Positioned Pelvic Strap for Extended use Comfort
- **COLOR -** Hi-Vis Yellow/Black

IS 3521:2021. CLASS D.
BIS LIC NO. CM/L 5100090478

EN 361:2002

FRONT VIEW REAR VIEW

WEBBING	D-RINGS	BUCKLES	STITCHING	LOOPS & PLATES
Synthetic Fiber. 44mm Width.	8mm Forged Zinc Plated	Set of Big & Small. 4mm. Zinc Plated.	High Tenacity Nylon Thread.	Made of LDPE Material.
Webbing, D-Rings & Buckles - Breaking Strength >25KN			For Flexibility, Strength & Durability.	

Common Specifications For Both Products

SFH-107

Premium Specialised Full Body Harness.

FEATURES

- Dorsal D-Ring & Dual D-Rings at Waist Band for Fall Arresters
- Adjustable Thigh & Chest Strap.
- Dual Color Straps for Rapid Identification of Upper & Lower
- Premium quality & Comfortable back rest & waist pad
- **COLOR -** Black/Orange

IS 3521:2021. CLASS P.
BIS LIC NO. CM/L 5100090478

EN 361:2002
EN 358:1999

CAP TO PROTECT & COVER WEBBING END. ALSO PROVIDES EXTRA PROTECTION FROM SLIPAGE BETWEEN BUCKLES AT THE TIME OF FALL

Fall Protection

Body Harness

SFH-108

Premium Anatomically Designed Full Body Harness. Light Weight & Certified.

FEATURES

- Dorsal D-Ring For Attachments.
- Adjustable Thigh & Chest Straps.
- Waist Pad With Two Lateral D-Rings & Tool Loops.
- D-Rings At Front & Ventral Point for Fall Arrester & Rope Access.
- **COLOR -** Hi-Viz Yellow/Black

IS 3521:2021. CLASS L.
BIS LIC NO. CM/L 5100090478

EN 361:2002
EN 358:1999 & EN 813:2008

FRONT VIEW

REAR VIEW

WEBBING	D-RINGS	BUCKLES	STITCHING	LOOPS & PLATES
Synthetic Fiber. 44mm Width.	8mm Forged Zinc Plated	Set of Big & Small. 4mm. Zinc Plated.	High Tenacity Nylon Thread.	Made of LDPE Material.

Webbing, D-Rings & Buckles - Breaking Strength >25KN	For Flexibility, Strength & Durability.

Waist/Thigh/Shoulder Pads Made of Air Mesh Fabric & EVA . Comfort & Support During Extended Use

Common Specifications For Both Products

SFH-109

Premium Light Weight & Versatile Full Body Harness.

FEATURES

- Dorsal D-Ring & Dual D-Rings at Waist Band for Fall Arresters.
- Adjustable Thigh & Chest Strap.
- Dual Color Straps for Rapid Identification of Upper & Lower.
- Fray Proof Polyester Webbing.
- **COLOR -** Hi-Vis Yellow/Black

IS 3521:2021.
BIS LIC NO. CM/L 5100090478

EN 361:2002
EN 358:1999

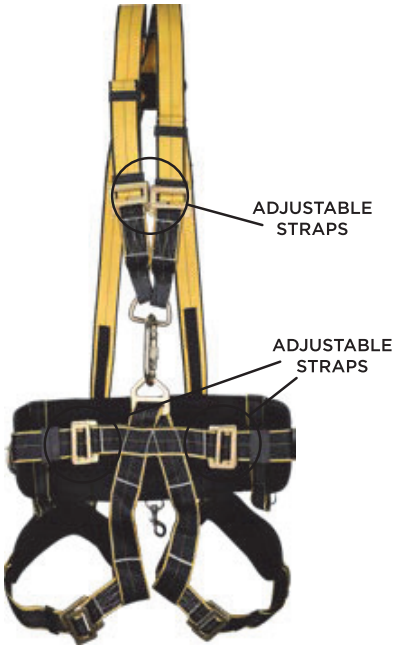

FRONT VIEW

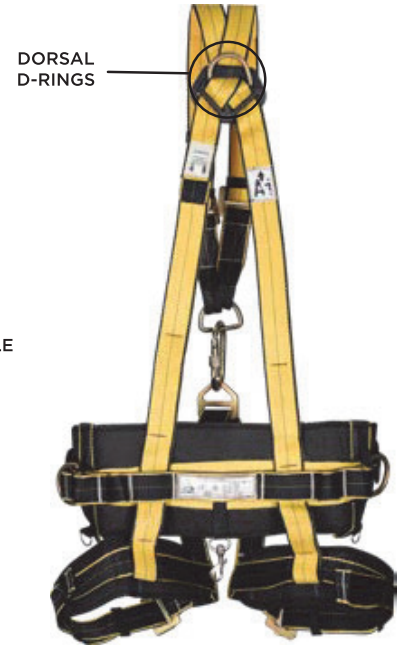

REAR VIEW

Fall Protection

Work Positioning Belts

SWP-01

Premium Work Positioning Belt With Thigh Support.

FEATURES

- Anchor Point Dual Lateral D-Rings for Positioning.
- D-Ring At Ventral Point For Rope Access Work..
- Soft Padded Waist & Thigh Pads, With Adjustable Straps.
- **COLOR -** Hi-Viz Yellow/Black

IS 3521:2021.
BIS LIC NO. CM/L 5100090478

EN 813:2008
EN 358:1999

FRONT VIEW REAR VIEW

WEBBING	D-RINGS	BUCKLES	STITCHING	LOOPS & PLATES
Synthetic Fiber. 44mm Width.	8mm Forged Zinc Plated	Set of Big & Small. 4mm. Zinc Plated.	High Tenacity Nylon Thread.	Made of LDPE Material.
Webbing, D-Rings & Buckles - Breaking Strength >25KN			For Flexibility, Strength & Durability.	

Common Specifications For Both Products

SWP-02

Basic Work Positioning Waist Belt. Economical Yet Certified.

FEATURES

- Superior Strength Fray Proof Webbing With Tool Loops.
- D-Ring At Waist Points For Precise Positioning.
- Soft Padded Waist Pads, With Adjustable Straps.
- **COLOR -** Hi-Vis Yellow/Black

IS 3521:2021.
BIS LIC NO. CM/L 5100090478

EN 813:2008
EN 358:1999

FRONT VIEW

BACK VIEW

Fall Protection

Hooks & Connectors

SKH-50

Premium Quality Steel Alloy Scaffolding Hook.

SPECIFICATIONS

- **MATERIAL -** Steel Alloy.
- **GATE OPENING -** 55 mm.
- **MIN BREAKAGE STRENGTH -** 25kN
- **PLATING -** Chrome / Zinc.
- **WEIGHT -** 500 grams.
- **COLOR -** Silver / Golden Yellow.

CE EN 362:2004
CLASS T

SKH-31

Premium Quality Steel Alloy Snap Hook.

SPECIFICATIONS

- **MATERIAL -** Steel Alloy.
- **GATE OPENING -** 16 mm.
- **MIN BREAKAGE STRENGTH -** 22kN.
- **PLATING -** Chrome / Zinc.
- **WEIGHT -** 190 grams.
- **COLOR -** Silver / Golden Yellow.

CE EN 362:2004
CLASS B

SKH-20

Premium Quality Steel Alloy Karabiner.

SPECIFICATIONS

- **MATERIAL -** Steel Alloy.
- **GATE OPENING -** 25 mm.
- **MIN BREAKAGE STRENGTH -** 25kN.
- **PLATING -** Chrome / Zinc.
- **WEIGHT -** 245 grams.
- **COLOR -** Silver / Golden Yellow.

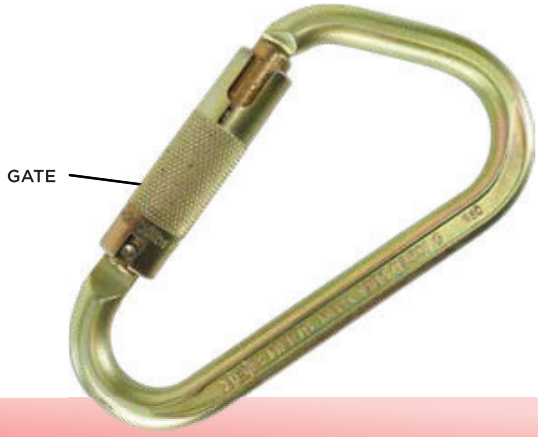

CE EN 362:2004
CLASS B

The Hooks & Connectors are an essential link in any vertical safety equipment kit. It is designed to be loaded in its major axis, with the gates closed and the sleeve locked. The rating of its breaking strength is determined when loaded at its major axis and closed properly. Understanding the strength & weaknesses of this essential link allows the user to choose the most appropriate type to use for a particular usage, thus avoiding any misuse that could be dangerous.

Fall Protection

Hooks & Connectors

SKH-21

Premium Quality Steel Alloy Karabiner.

SPECIFICATIONS

- **MATERIAL -** Steel Alloy.
- **GATE OPENING -** 16 mm.
- **MIN BREAKAGE STRENGTH -** 23kN.
- **PLATING -** Chrome / Zinc.
- **WEIGHT -** 160 grams.
- **COLOR -** Silver / Golden Yellow.

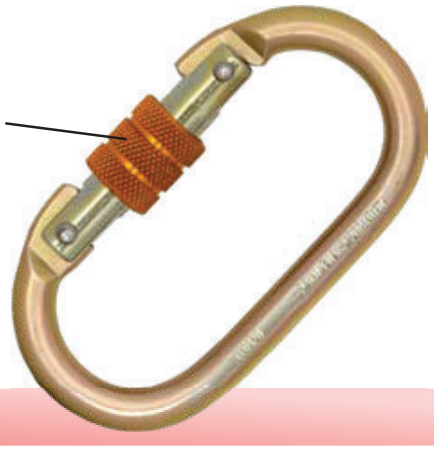

CE EN 362:2004
CLASS B

SKH-21A

Superior Quality Aluminium Alloy Karabiner.

SPECIFICATIONS

- **MATERIAL -** Aluminium Alloy.
- **GATE OPENING -** 18 mm.
- **MIN BREAKAGE STRENGTH -** 23kN.
- **PLATING -** Anodised Aluminium.
- **WEIGHT -** 80 grams.
- **COLOR -** Silver.

CE EN 362:2004
CLASS M

SKH-22A

Superior Quality Aluminium Alloy Karabiner.

SPECIFICATIONS

- **MATERIAL -** Aluminium Alloy.
- **GATE OPENING -** 25 mm.
- **MIN BREAKAGE STRENGTH -** 22kN.
- **PLATING -** Anodised Aluminium.
- **WEIGHT -** 90 grams.
- **COLOR -** Silver.

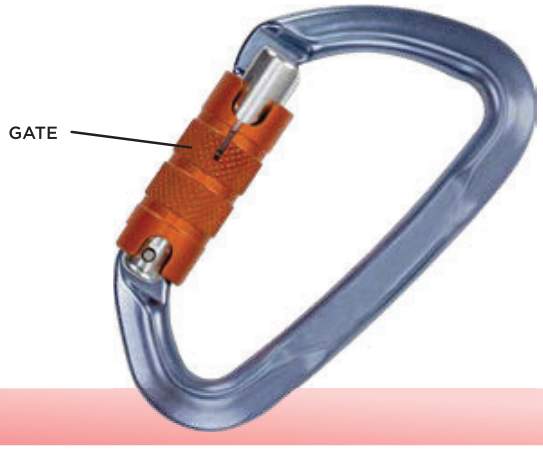

CE EN 362:2004
CLASS M

Fall Protection

Rope Grab & Fall Arrester

SF-RGFA-B20

Premium Guided type Rope Grab Fall Arrester.

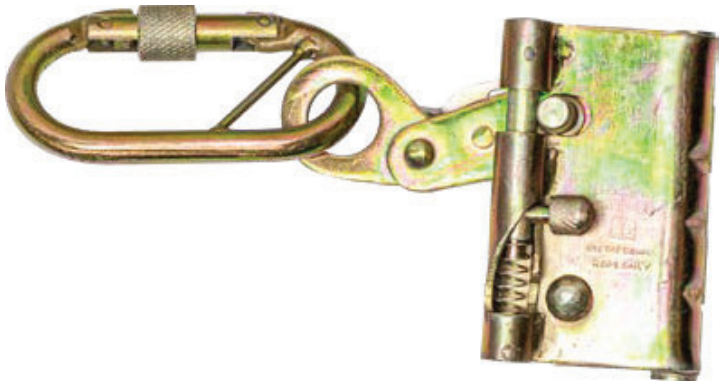

FEATURES & SPECIFICATIONS

- Designed for use with 2/14 mm diameter flexible twisted rope.
- **MATERIAL -** Made of Alloy Steel.
- Double locking security system design, prevents accidental opening.
- Built in gravity locking mechanism, which prevent incorrect usage.
- Includes SKH21 Karabiner.

CE EN 353-2:2002

SF-RGFA-B20S

Premium Guided type Rope Grab Fall Arrester with Spacing Strap.

FEATURES & SPECIFICATIONS

- Designed for use with 2/14 mm diameter flexible twisted rope.
- **MATERIAL -** Made of Alloy Steel.
- Double locking security system design, prevents accidental opening.
- In-built gravity locking mechanism, prevents misuse.
- Includes SKH21 Karabiner.
- Spacing Strap for manoeuvring easily during ladder work.

CE EN 353-2:2002

SF-RGFA-B20E

Guided type Rope Grab Fall Arrester with Energy Absorber.

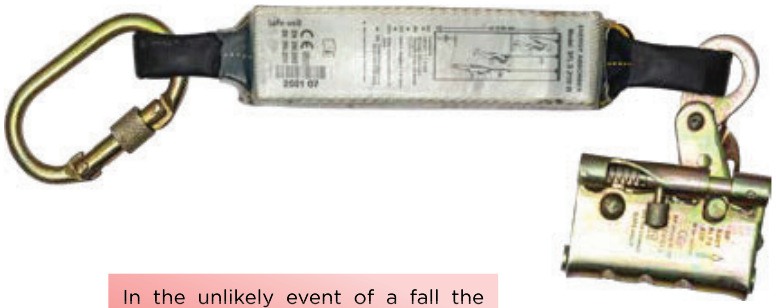

FEATURES & SPECIFICATIONS

- Designed for use with 2/14 mm diameter flexible twisted rope.
- **MATERIAL -** Made of Alloy Steel.
- Dual safety locking system design, prevents accidental opening.
- In-built gravity locking mechanism, prevents misuse.
- Attached Energy Absorber with SKH21 karabiner.

In the unlikely event of a fall the energy absorber reduces the energy exerted on the user in order to keep impact forces around 900 lb

CE EN 353-2:2002

Fall Protection

Retractable Fall Arrester

SRFA-060W

Steel Cable Type Retractable Fall Arrester.

FEATURES & SPECIFICATIONS

- Compact & Light Weight.
- Durable & Corrosion Resistant PP Housing & Drum.
- **ANCHORAGE -** Swivel Type Steel Snap Hook, Includes Conduit Rope.
- **CABLE -** Length 6 mtrs / Width 4 mm.
- **MAXIMUM LOAD CAPACITY -** 100 Kgs.
- **MINIMUM BREAKING STRENGTH -** 20 kN.

CE EN 360:2002

SRFA-10

Steel Cable Type Retractable Fall Arrester.

FEATURES & SPECIFICATIONS

- Compact Design For Ease Of Use.
- ABS Housing For Durability, Sturdiness & Rough Usage.
- **ANCHORAGE -** Swivel Type Steel Snap Hook, Includes Conduit Rope.
- **CABLE -** Length 10 mtrs / Thickness 4 mm
- **MAXIMUM LOAD CAPACITY -** 100 Kgs.
- **MINIMUM BREAKING STRENGTH -** 20 kN.

CE EN 360:2002

Fall Protection

Lanyards

SRL 50DW

Harness Attachment. Webbing Type Lanyard with Dual Hooks. Without Shock Absorber.

SPECIFICATIONS

- **LIFELINE -** Dual 44 mm Webbing Type.
- **LIFELINE LENGTH -** 1.8 Meters.
- **HOOKS -** Dual Scaffolding Hooks.

AVAILABLE LIFELINE OPTION

SRL 50D - 12 mm Polyamide Rope.

SRL 50D/P - 12 mm Poly Propylene Rope.

SRL 50D/B - 10.5 mm Braided Rope.

CE EN 354:2010

SFL D2150

Harness Attachment. Rope Type Lanyard with Dual Hooks. With Shock Absorber.

SPECIFICATIONS

- **LIFELINE -** Dual 12 mm Polyamide Rope.
- **LIFELINE LENGTH -** 1.8 Meters.
- **HOOKS -** Dual Scaffolding Hooks.

AVAILABLE LIFELINE OPTION

SFL D2150P - 12 mm Poly Propylene Rope.

SFL D2150W - 44 mm Webbing.

SFL D2150B - 10.5 mm Braided Rope.

CE EN 355:2002
VG11 PPE63

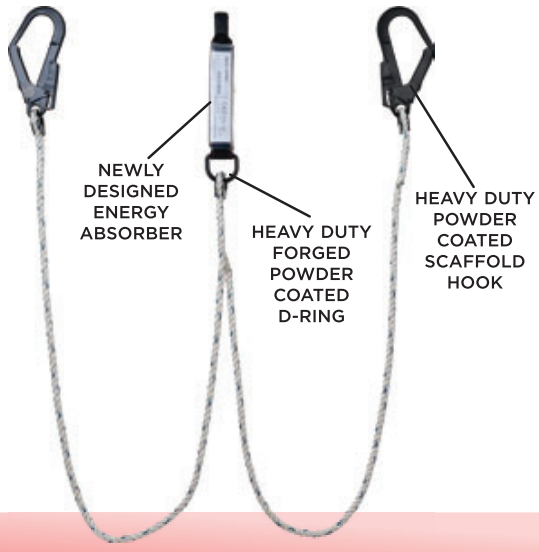

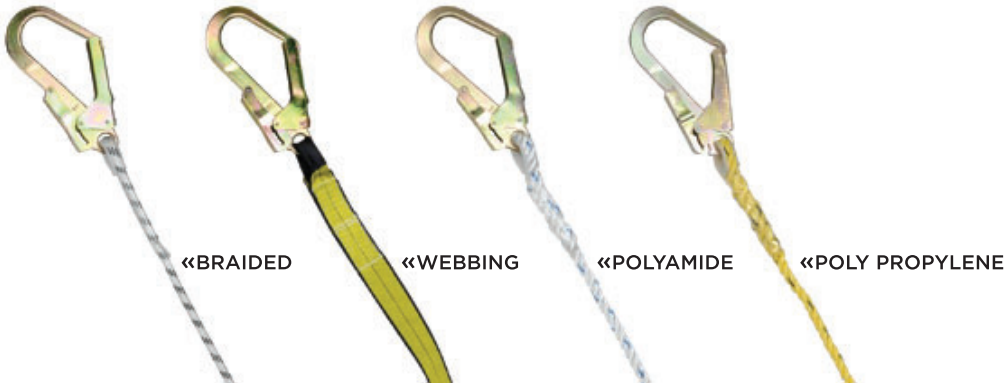

Fall Protection

Painting & Maintenance Kit

1

2

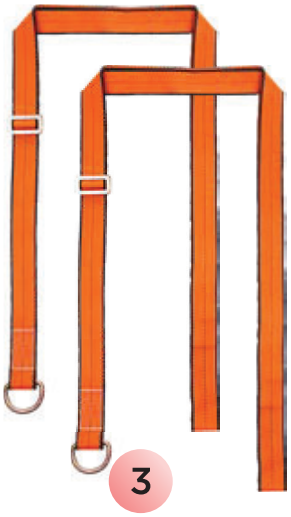

3

4

5

6

8

7

9

The kit consists of selection of products deemed fit for carrying out painting and maintenance jobs in an elevated area.

Everything comes packed in a KIT BAG.

1. Harness
2. Kernmantel Rope (50 mtrs)
3. Webbing Sling (2 nos)
4. Polymaide Rope (50 mtrs
5. Fall Arrestor
6. Parapet Anchor (2 nos)
7. Karabiner (3 nos)
8. Descender
9. Rock Chair

Fall Protection

Rescue Kit

1

2

3

4

5

6

7

9

8

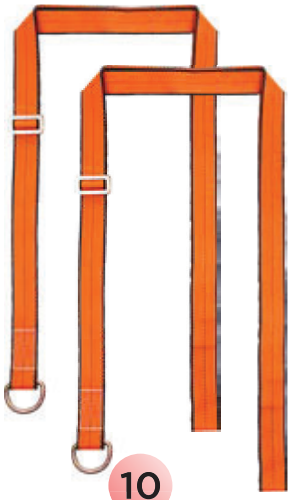

10

The kit consists of selection of products deemed fit for rescue operations in common scenarios.

Everything comes packed in a KIT BAG.

1. Harness
2. Cows Tail Lanyard
3. Fall Arrestor
4. Descender
5. Polymaide Rope (50 mtrs)
6. Karabiner (3 nos)
7. Double Lanyard (Braided)
8. Blade-less Cutter
9. Kernmantel Rope (50 mtrs)
10. Webbing Sling (2 nos)