

REGUPOL®

AKTIVLOK

Precision-fit Sports and Fitness Flooring



 **REGUPOL®** AMERICA

REGUPOL.COM

Enduring the rigors, with interlocking, seamless style.

Regupol Aktiv™ sports and fitness roll flooring is also available in interlocking tiles. These recycled rubber tiles interlock with a fit so precise, its seams are virtually invisible. Like Regupol Aktiv, AktivLok goes well beyond “fitness for purpose” in the selectorized area, the spinning room, the “iron den”— every space in the facility.

Performance. Measured in miles.

Thousands of miles of AktivLok have been manufactured using state-of-the-art equipment, the cleanest raw materials, and the most consistent color infusion. You get toughness, resiliency, shock absorption, durability, safety and great looks. That’s overall performance only the inventor can offer.

Loose-laid for easy installation and “non-permanent” permanence.

AktivLok can be loose-laid over almost any sub-floor or finished floor, without permanent bonding to the substrate. But, make no mistake about it, AktivLok stays put until you’re ready to remove it or relay it. Plus, because it’s made of up to 100% post-consumer tire rubber and post-industrial EPDM rubber to the strictest environmental standards, using AktivLok can qualify your facility for LEED credits.



Design flexibility is locked in.

Regupol AktivLok can be used to create an entire fitness floor in virtually any creative, attractive pattern you can imagine. Or use it in combination with Regupol Aktiv roll flooring as a border or other accent treatment.


Core Series *(corners, borders & centers)*



AL10100
Jet Black




AL10101
Gray Hound



AL10102
Jayz Blue




AL10104
Titan Tan




AL10105
Firestorm Red


Strength Series *(centers only)*




AL35100
Gray Ghost



AL35101
Devil Blue



AL35102
Green Monster



AL35103
Red Tempest




AL35104
Tenacious Tan

Additional colors available upon request. Minimums apply.

Product Specifications

Product Form Dimensions:

Standard Tile Dimensions: 24" X 24" x 3/8"

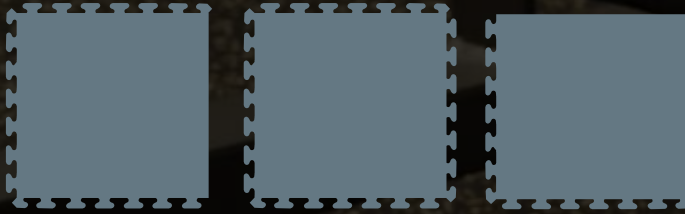

Patterns AL10100, AL10101, AL10102, AL10104 and AL10105 available in border, center and corner tiles

Patterns AL35100, AL35101, AL35102, AL35103 and AL35104 available in center tiles only

Product Performance Data

Density	ASTM D3676	60 pcf
Hardness	ASTM D2240 (Shore A)	65 +/- 5
Tear Strength	ASTM D624	80 pli min
Elongation	ASTM D412	> 145%
Tensile Strength	ASTM D412	> 220 PSI
Flexibility	ASTM F137 1/4" Mandrel	Pass
Resistance to Chemicals	ASTM F925	No Change
LEED Qualification	Qualifies for Material and Resources Credit	

REGUPOL®

AKTIVLOK



Please feel free to contact us:

Phone+1 800.537.8737

Email sales@regupol.com