QUALITY EQUIPMENT DISTRIBUTORS, INC.

QVL8-D

Portable LED Film Viewer combined with a Densitometer

Electronic Light Mask

5 Year Parts Warranty

CE Approved

Densitometer Accuracy: ±0.02D

• Viewing Window: 3.25" W x 8" L



MAX LUMINANCE = 120,000 Cd/m²

Uniformity = 0.95

Diffusion Factor = 0.95

Characteristics:


- Luminance: 120,000 Cd/m²
- High Accuracy: ±0.02D
- Uniformity: 0.95, Diffusion Factor: 0.95
- Window Size: 3.25" W x 8" L
- Low Profile and Light Weight
- Surface Temperature After 12 Hours Max Luminance ≤ 59°F
- No Fan Design, Integral Aluminum Design, Stays Cool and Quiet

What is an electronic light mask?

Traditionally we use a series of metallic light masks which overlay on the surface of the film viewer. It is inconvenient to replace light masks when you want to change the size of light, in addition energy is also wasted because the metalic light masks simply masks the light where you do not need, but the entire light screen is still turn on.

Electronic light mask are controlled by electronics. The QVL8 light screen is divided into 4 areas, you can turn on or turn off each section of light by pressing one button. With the help of it, you just turn on the area you need, it will be convenient when you change the size of light, low heat and low energy cost.

The size of light will be switched as below:

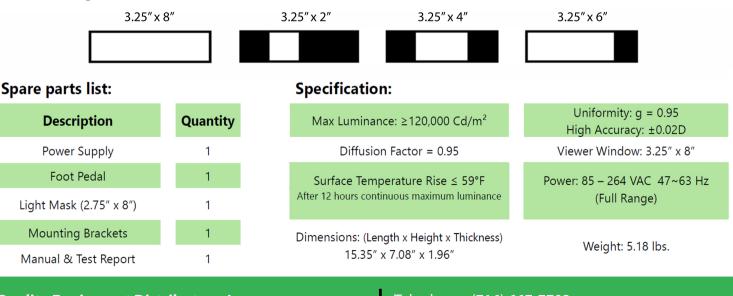

Quality Equipment Distributors, Inc. 3176 Abbott Road, Suite 700N Orchard Park, NY 14127 Telephone: (716) 667-7703 Web: www.qeddirect.com Email: sales@qeddirect.com