


January 25th, 2023




TATSUNO CORPORATION



*The Introduction
of
the latest Petrol Pump & Dispenser series*


Sunny-XE






Features without comparison

- » *Excellent measuring accuracy over a long time*
- » *Even better quality even more durable*
- » *Lower Maintenance Costs*
- » *Energy Saving*
- » *Dedicated TATSUNO Hanging Parts Array*

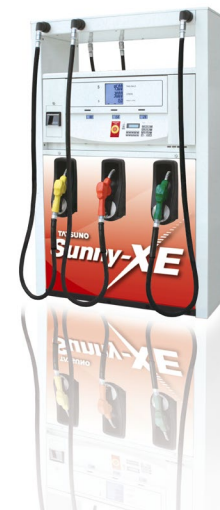




Features without comparison

» *Excellent measuring accuracy over a long time*

In Japan, Government recalibration is required for Tatsuno Meter once a 7 years long after installation.







Features without comparison

» Even better quality even more durable

Over 5 million liters with appropriate maintenance.

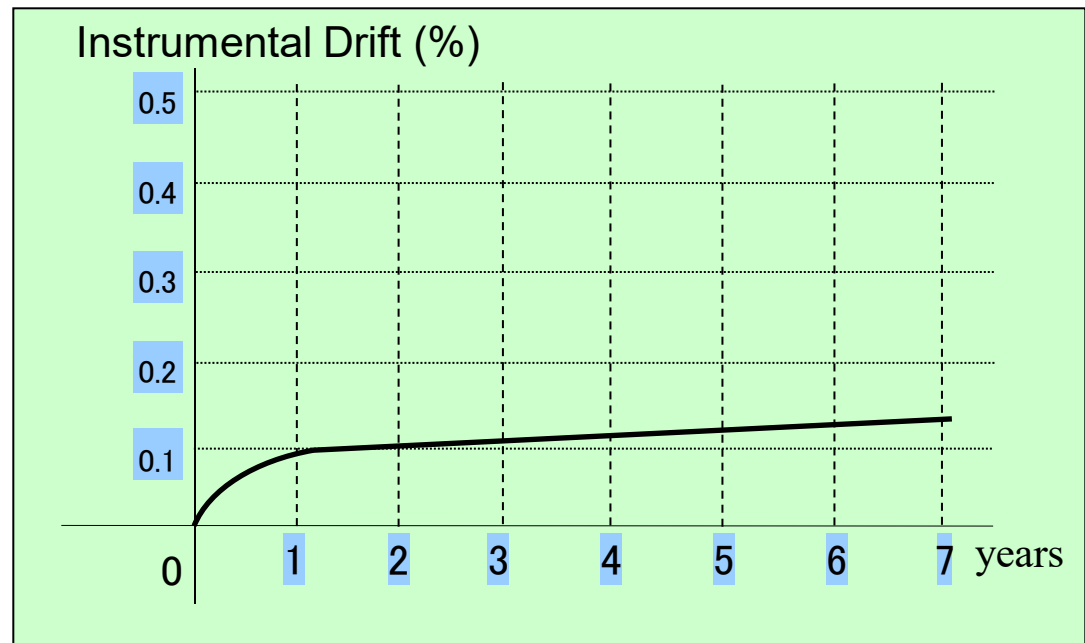




Features without comparison


>> Lower Maintenance Costs



Reliable, High-precision
Tatsuno Hydraulics (pump/Meter)

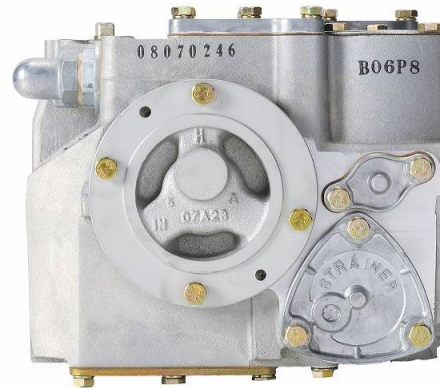

Meets OIML standards
and achieving optimum
balance of excellent
performance economically



Features without comparison


>> Energy Saving


All new function with Ecology philosophy.



Programmable Power Saving

- Automatic Back light off
- Automatic Device power off
- Automatic Pump stop etc.

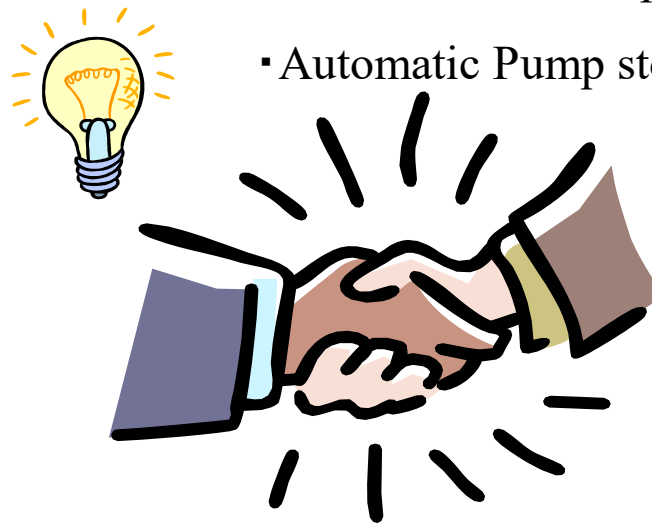




Features without comparison

» *Dedicated TATSUNO Hanging Parts Array*

All parts are produced by TATSUNO ourselves.











Features without comparison

Full line up of series

- 1111** – Island/Lane oriented
- 1222** – Island/Lane oriented
- 2222** – Island/Lane oriented
- 2422** – Lane oriented
- 2444** – Lane oriented
- 3331** – Lane oriented
- 3662** – Lane oriented
- 3664** – Lane oriented
- 4882** – Lane oriented
- And


Ultra High speed dispensers






Friendly but Steady

Enhanced counter

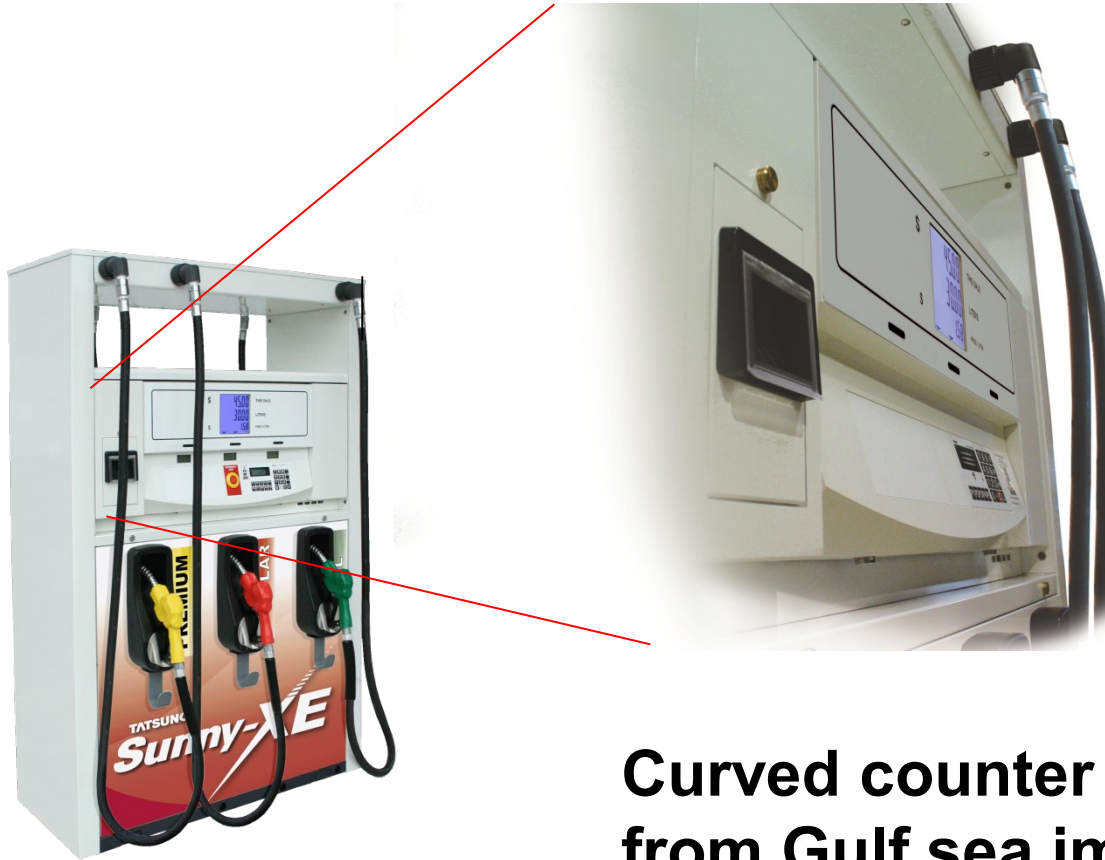


**Curved counter design
from Gulf sea image**



Friendly but Steady

Enhanced counter

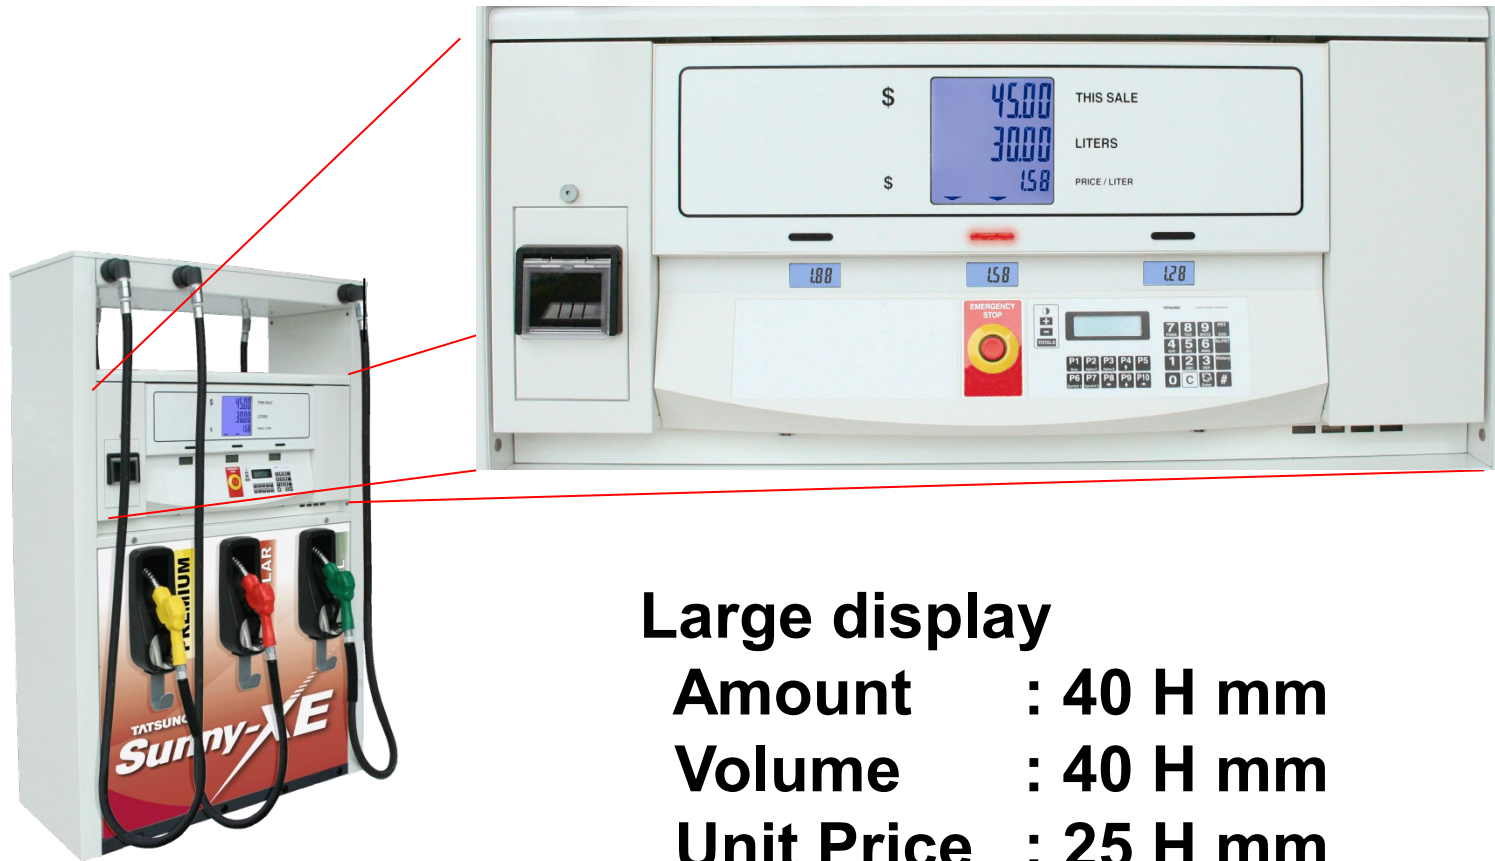


Large display

Amount : 40 H mm


Volume : 40 H mm

Unit Price : 25 H mm




Friendly but Steady


Enhanced counter

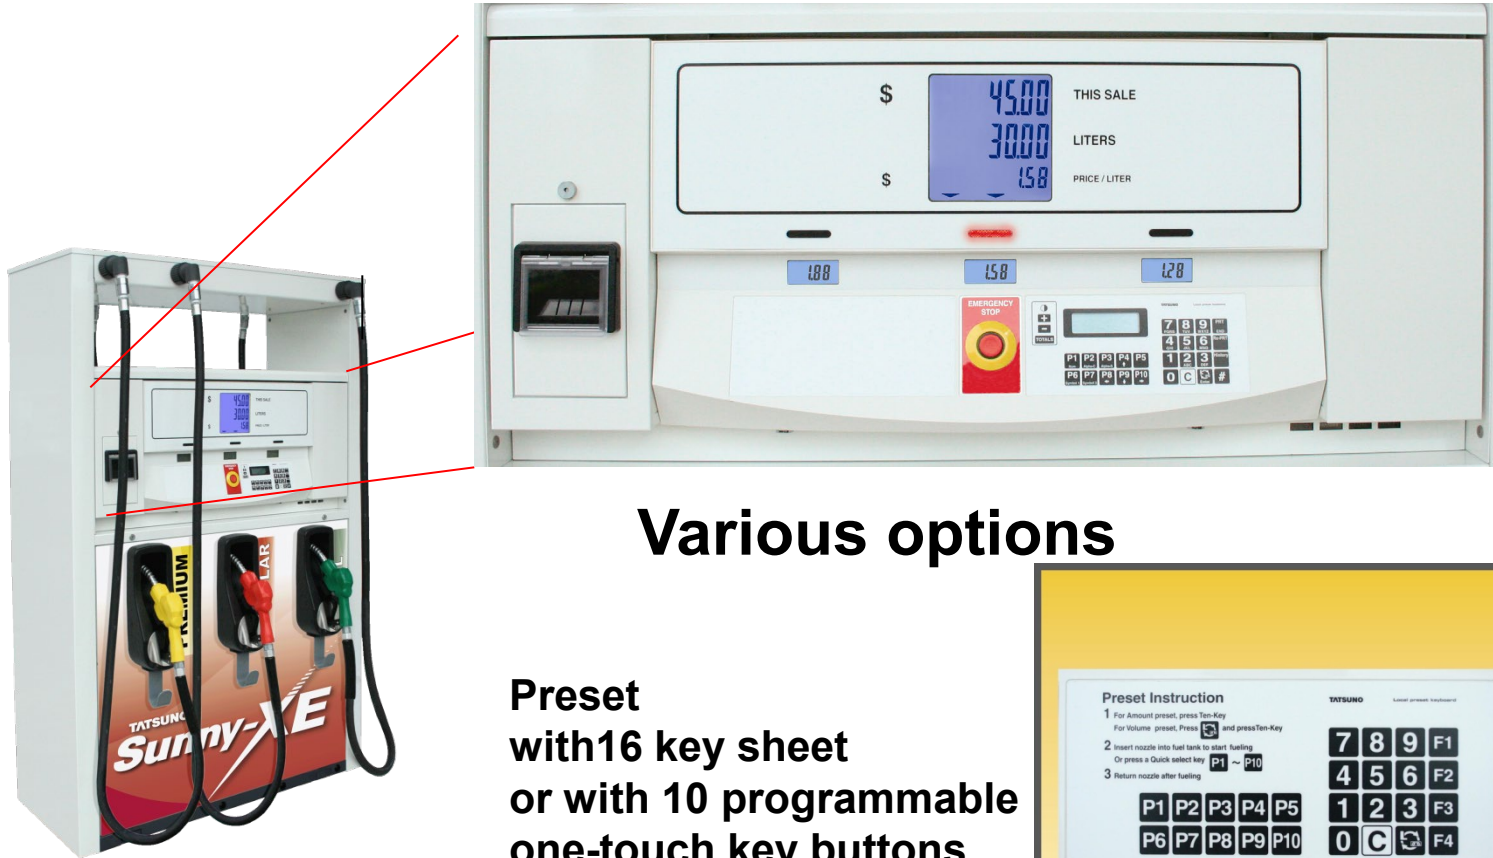

Various options


**Preset
with 16 key sheet
or with 10 programmable
one-touch key buttons**

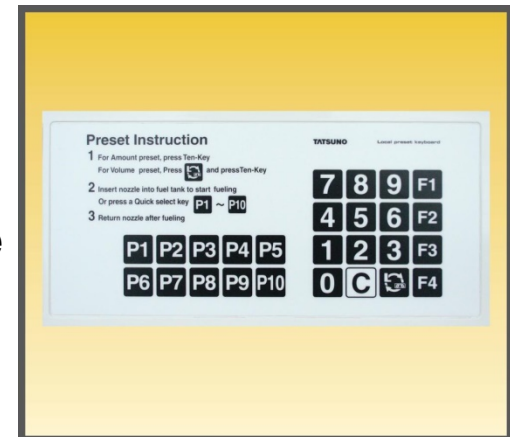



Friendly but Steady


Enhanced counter

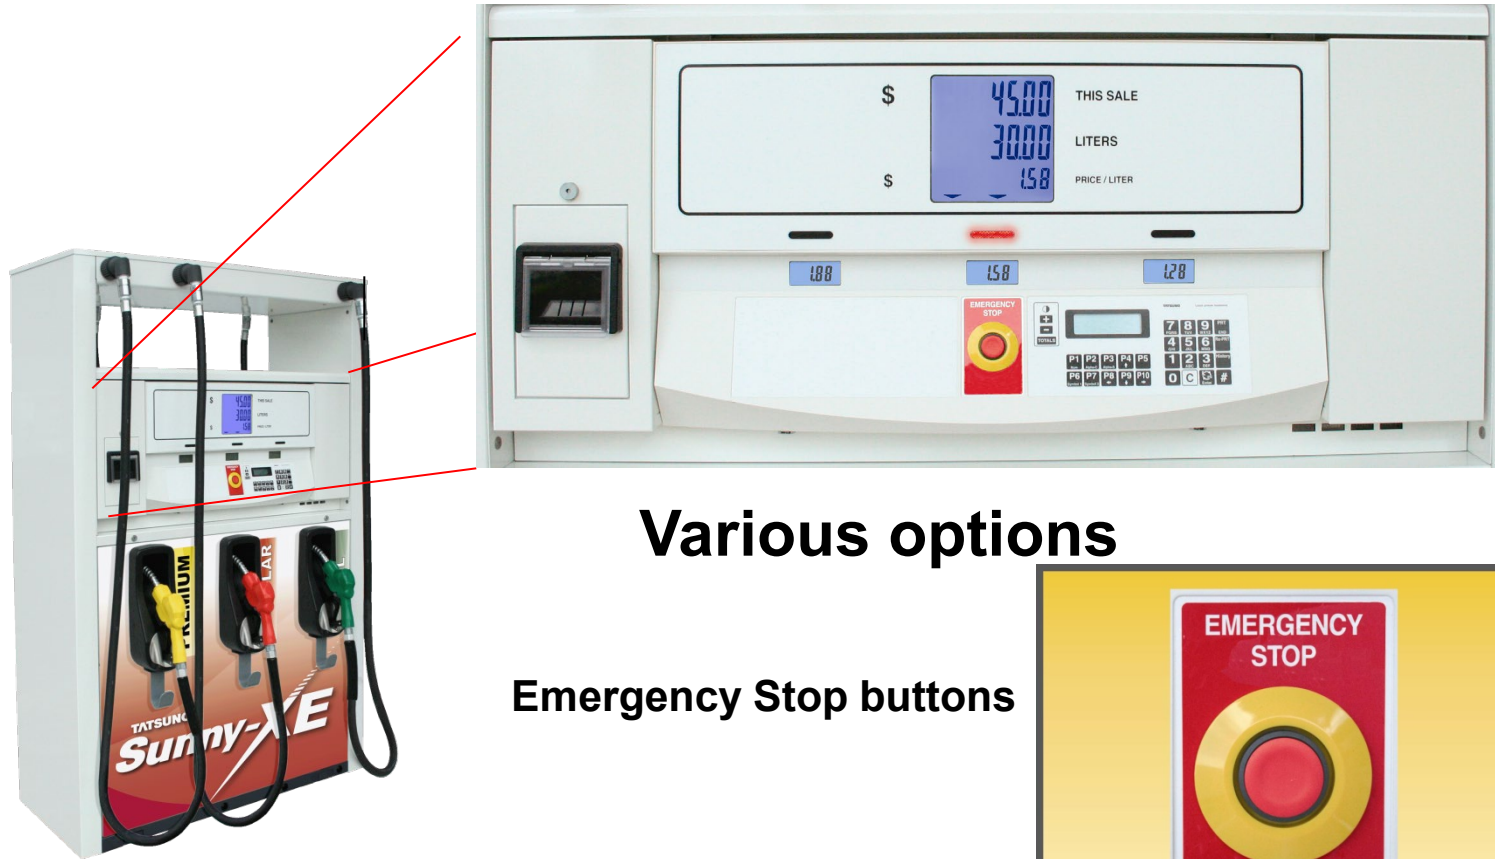

Various options


Emergency Stop buttons





Friendly but Steady


Enhanced counter

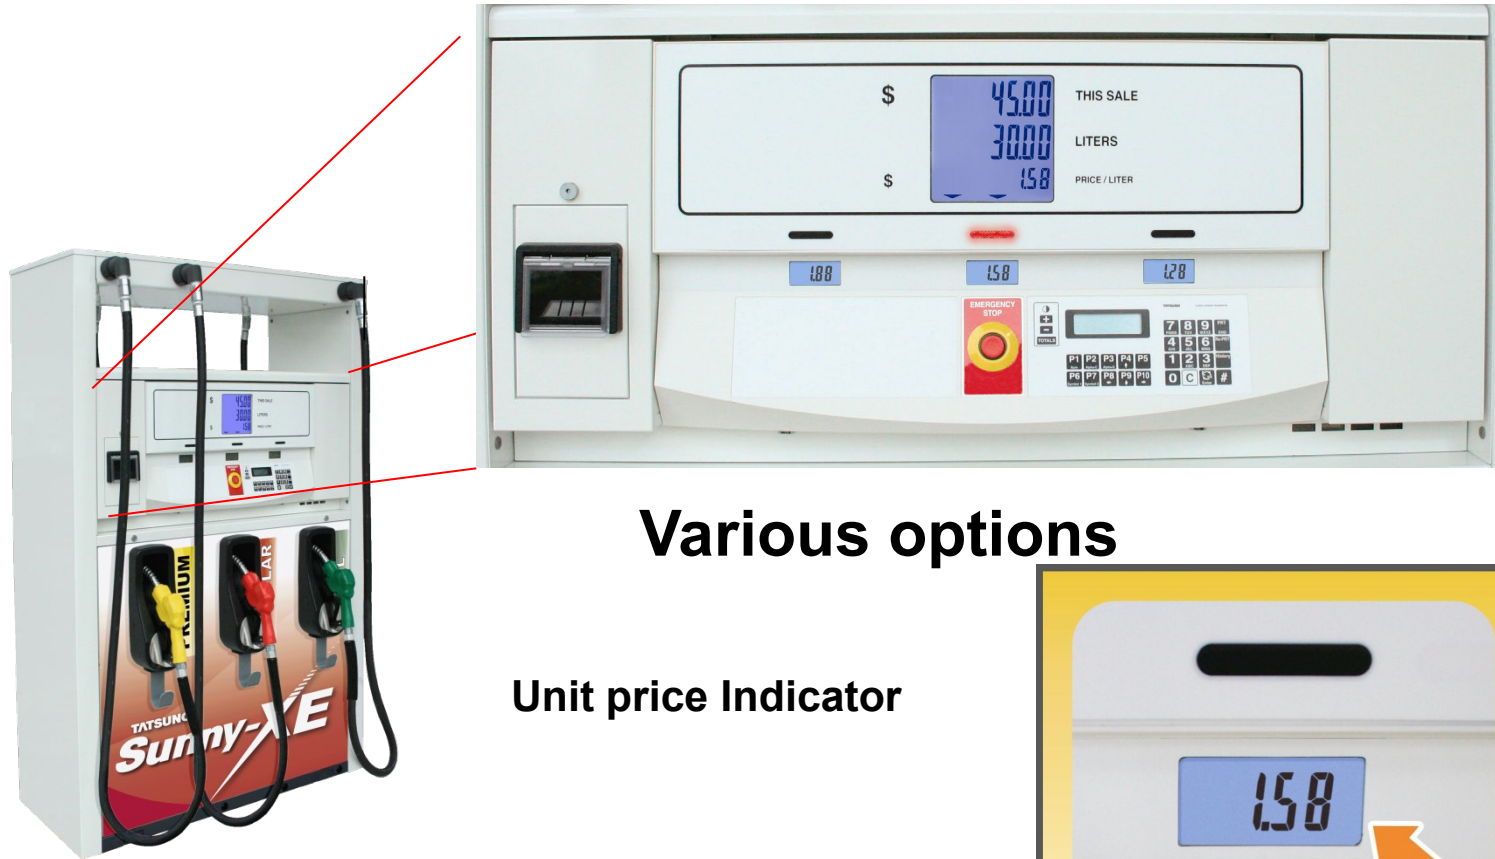

Various options


Unit price Indicator





Friendly but Steady


Enhanced counter

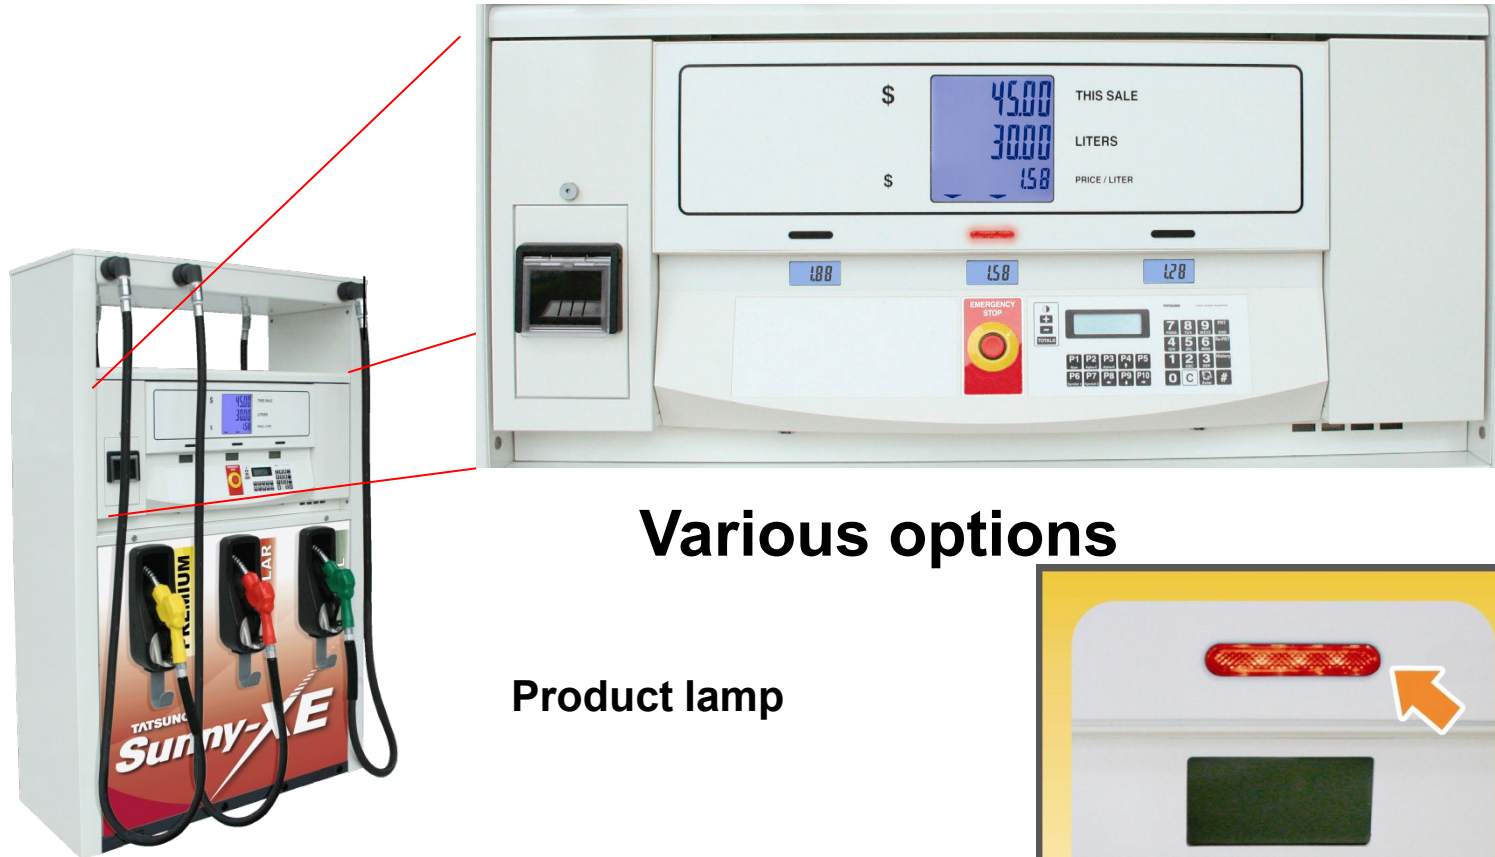

Various options

Product lamp






Friendly but Steady

Enhanced counter




Various options





Friendly but Steady


Enhanced counter

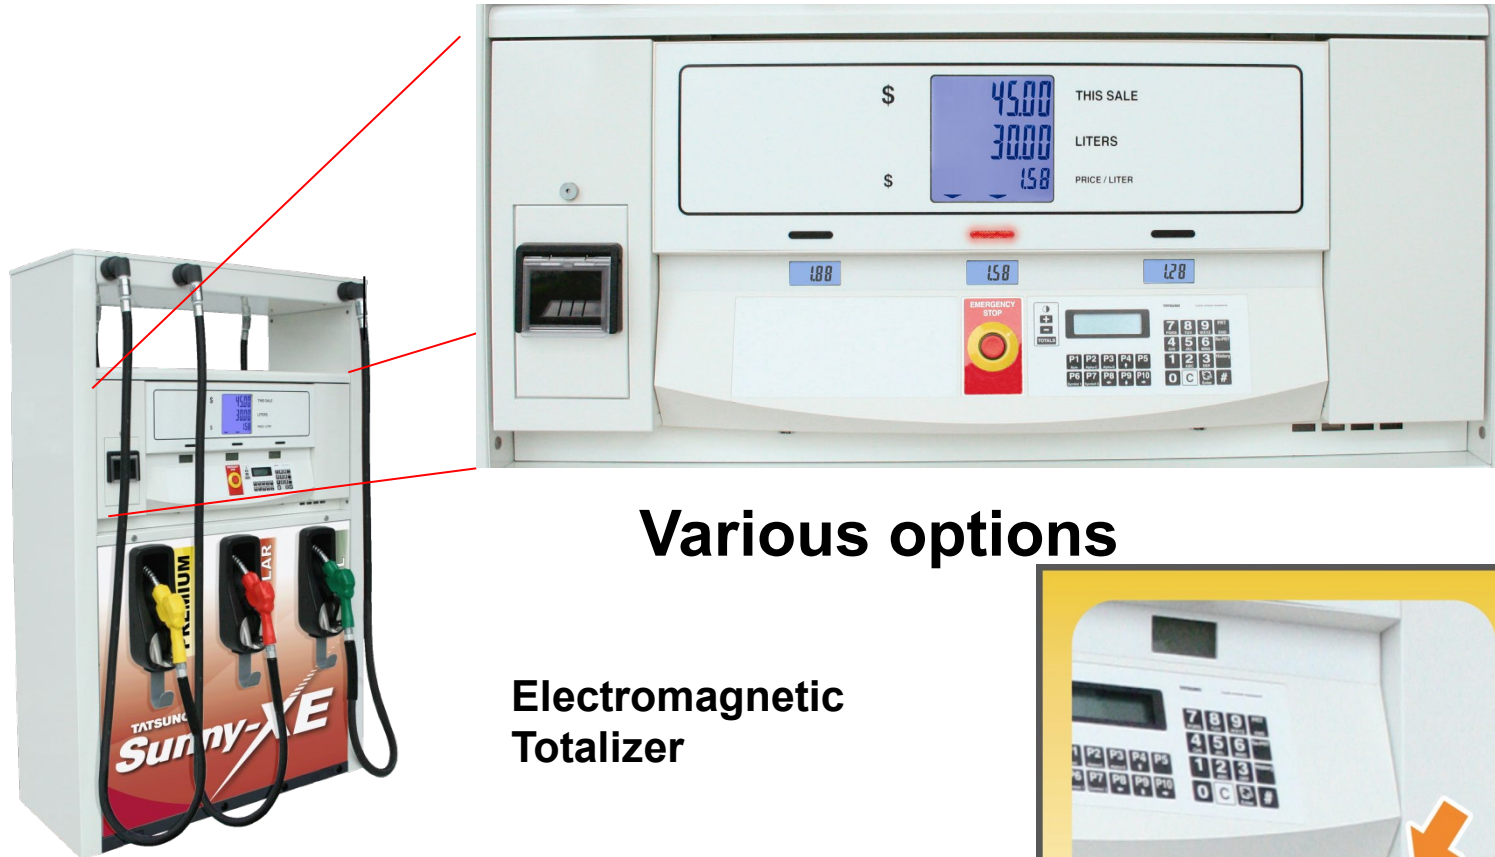

Various options


**Electromagnetic
Totalizer**






Friendly but Steady


Enhanced counter

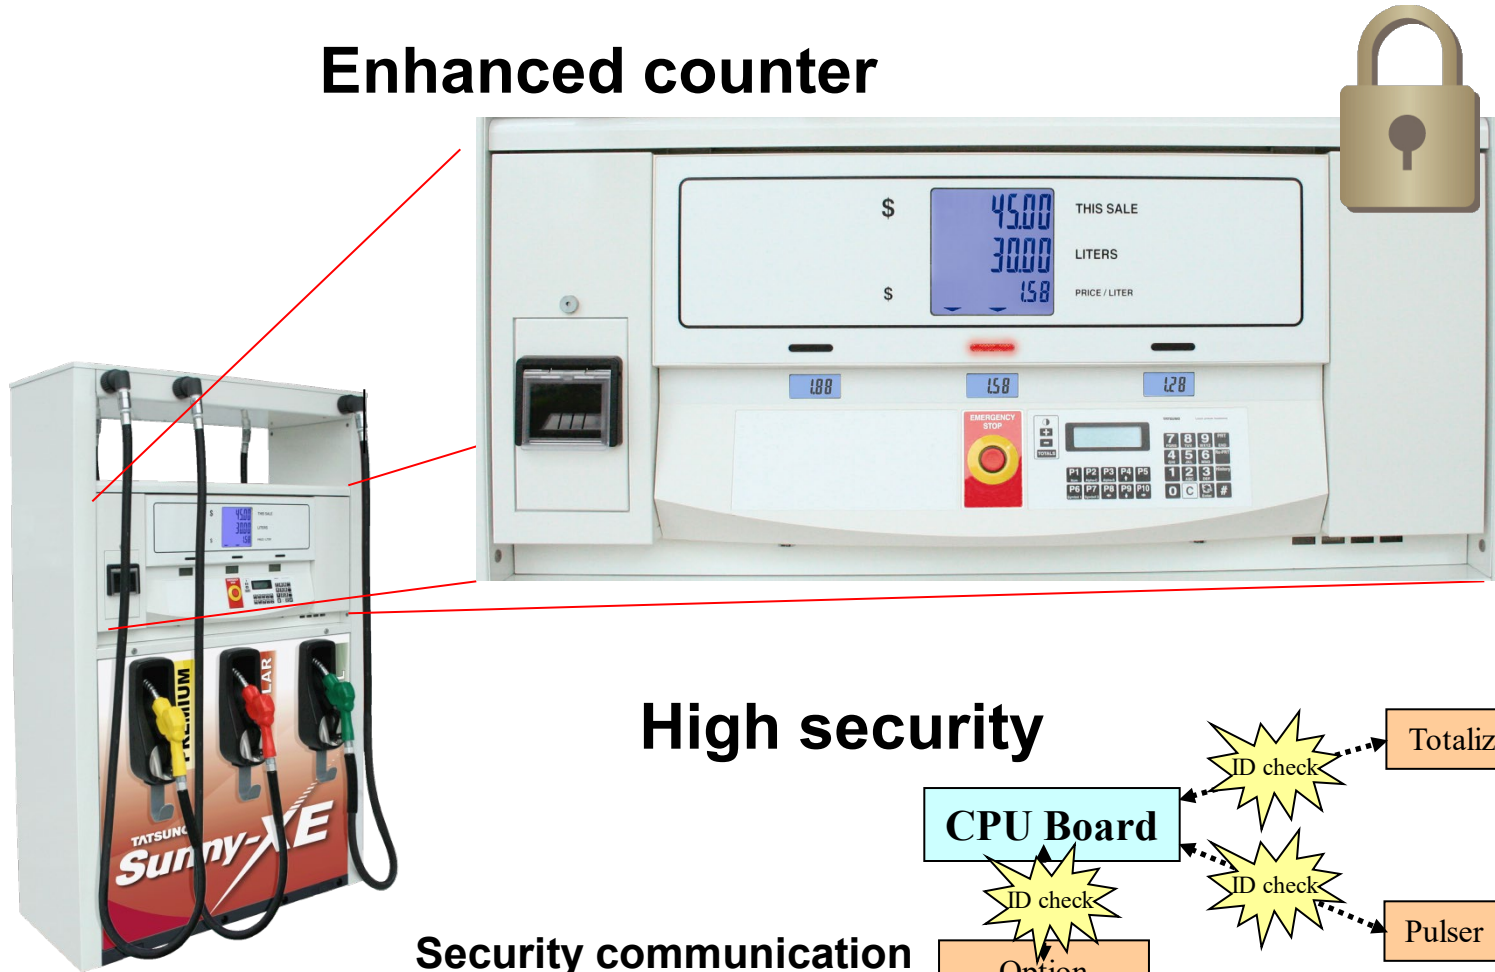

High security

Security communication
between PCBs

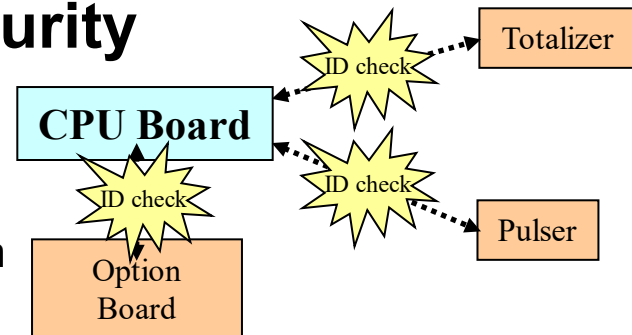



Friendly but Steady


Eco-Power Feature




Under operation



Back-light (idle time)

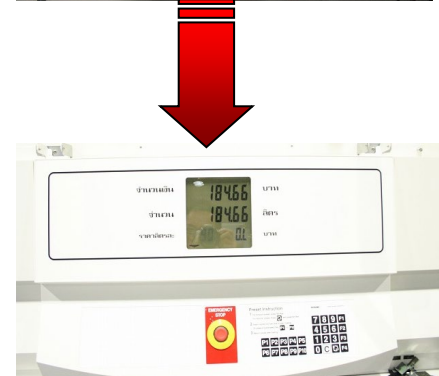

Programmable Power Saving Feature !




Friendly but Steady

Easy maintenance & security




Counter frame

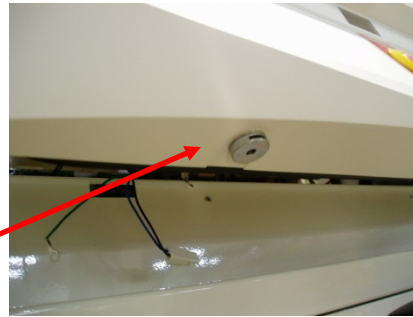

Pump cover



**Common key
For
faster maintenance**



Friendly but Steady

Various accessories



Safety Breakaway Coupling




Safety Breakaway Coupling cover



Filling cap tray




Variety of Tatsuno Nozzle




*You can surely select and customize
the most suitable models
for your operation among Sunny-XE series*

Sunny-XE







Thank you !



Comparison among Tatsuno Models

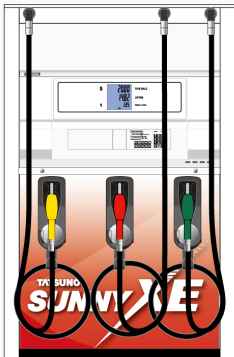	Neo-Sunny	Sunny-XE	Sunny-G II
Model	Multi Type	Multi Type	Narrow Type Side Nozzle
Design (Appearance)	 Size: 1,280 W mm 2,300 H mm 530 D mm	 Size: 1,280 W mm 1,950 H mm 530 D mm	 Size: 800 W mm 1,750 H mm 400 D mm
Manufacturing location	Japan	Japan	Japan




Comparison among Tatsuno Models

Specification table

			Neo-Sunny	Sunny-XE	Sunny-GII
Specification	ITEM				
	1 Nozzle - Automatic type		option	standard	standard
	- Just stop type		standard	option	option
	2 Swivel - Single type		option	standard	standard
	- Double type		standard	option	option
	3 Hose		3/4 - 15 feet	3/4 - 12 feet	3/4 - 15 feet
	4 Anti-kinking Sleeve		N/A	option	standard
	5 Display - 6-6-4 digits		standard	N/A	N/A
	- 7-7-5 digits		option	standard	standard
	Amount		35 mm	40 mm	30 mm
	Volume		35 mm	40 mm	30 mm
	Unit price		24 mm	25 mm	24 mm
	6 Motor - 1 phase 560W		N/A	standard	N/A
	- 1 phase, 750 W		standard	option	standard
	7 OVP		standard	standard	standard
	8 POS interface		standard	standard	standard
	9 Calibration - Electronic		standard - by choice	standard	N/A
	- Mechanical		standard - by choice	N/A	standard





Comparison among Tatsuno Models

		Neo-Sunny	Sunny-XE	Sunny-GII
10	High speed (60L/m)	standard	option	option
11	Max speed (80L/m)	N/A	N/A	option
12	EMG stop button	option	option	option
13	Preset	standard	option	option
14	Electronic totalizer	standard	standard	standard
15	Electromagnetic totalizer	standard	option	option
16	Mechanical totalizer	option	N/A	N/A
17	Breakaway coupling	Tatsuno	option	option
18	Sight glass	option	option	option
19	Paper filter	standard	standard	standard
20	Washable filter	option	option	option
21	Cap tray	option	option	N/A
22	Flexible pipe	standard	option	option
23	Connecting pipe	standard	option	option
24	Product lump	option	option	N/A
25	Individual U/P indicator	option	option	N/A
26	Built-in Printer	option	option	N/A
27	Security system	N/A	option	N/A
	* ID pulser	N/A	option	N/A
	* Security communication between PCBs	N/A	option	N/A

