



MOROOKA



NEW RELEASE

CARRIER

MST-700VD

RUBBER CRAWLER CARRIER

Max. payload 4.3 ton
Enforced bumper for severe condition
Reverse seat to improve
visibility and operability
Dual lever to ensure excellent
maneuverability

KUBOTA V3800
Tier 4 interim engine

It dramatically reduces PM and NOx
in exhaust gas to contribute to the
environment.


Experience and achievement World's No.1 **MOROOKA RUBBER CRAWLER CARRIER**

REVERSE SEAT

Rotational reverse seat is originally featured to support operator when traveling backwards. Rotation can be done by simple one-touch lever.

FORWARD

BACKWARD

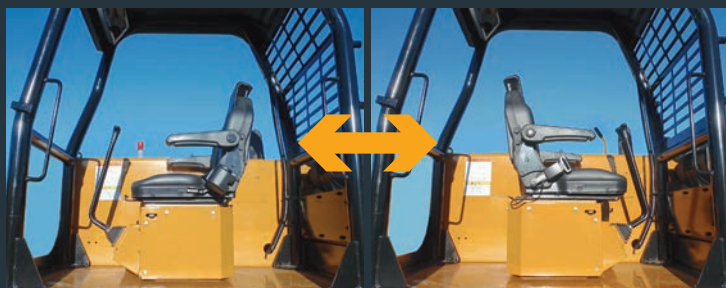

SAFETY

New enforced bumper is originally featured. Canopy is ROPS (roll-over protective structure) and FOPS (falling-object protective structure) certified.



EASY MAINTENANCE

New design enables to do inspection and maintenance easily.



FUEL TANK/BATTERY BOX COVER


RADIATOR COVER

HYDRAULIC PILOT TYPE LEVER

Traveling is done by simply operating pilot-type dual lever. It helps to reduce operator's fatigue, and also has excellent responsiveness and detailed maneuverability.



| Specifications | | |
|-------------------------|--------|------------------|
| Model | | MST-700VD |
| Machine Weight | kg | 5,900 |
| Maximum Payload | kg | 4,300 |
| Engine Model | | KUBOTA V3800 |
| Nominal Output/rpm | kw/rpm | 69.2/2,200 |
| Overall Length | mm | 4,520 |
| Overall Width | mm | 2,225 |
| Overall Height | mm | 2,575 |
| Dump Body | mm | 2,500x1,850x360 |
| Min. Ground Clearance | mm | 350 |
| Crawler Width | mm | 500(550) |
| Drive System | mm | HST |
| Speed Low/High | km/h | 0~7/0~10 |
| Ground Pressure (empty) | kPa | 23.2 |

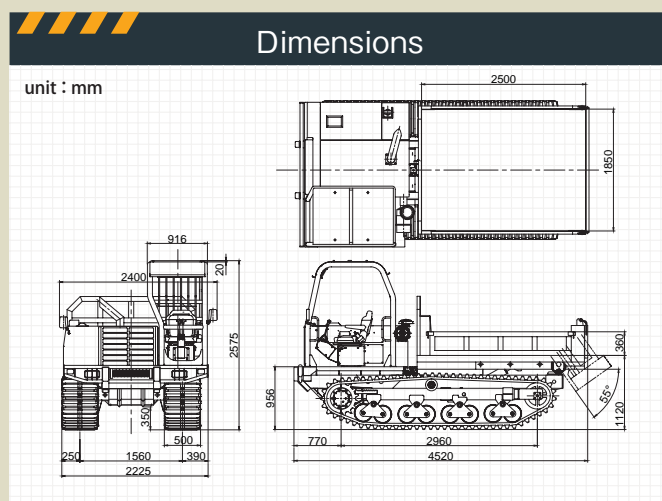

MOROOKA
Morooka Co., Ltd.



CONTACT

Postal Code : 301-0031
358 Shoubeeshindenmachi, Ryugasaki city, Ibaraki prefecture, Japan
TEL : +81-297-66-2111 FAX : +81-297-66-3110
URL : www.morooka.co.jp(Japanese)
www.morooka.com(English)