

# LED DISK DOWN LIGHT

Wattages: 15W

LED Disk Down Light can be widely used in indoor lighting (Damp location) suitable for office, indoor playground, hotel, shop, indoor entertainment places, and other indoor place.




**TIME SWITCH**  
5MIN (FACTORY SETTINGS)



**PIR SENSOR**  
(Standard)



**CCT SWITCH**  
4000K (FACTORY SETTINGS)



**D556-90-CCT-WH-MS**

**D236D-90-CCT-WH**



## Features

- Energy efficient: save up to 80% in energy costs
- High lumen output
- Mercury-free
- Instant-on light
- 50,000 hours at 70% lumen maintenance rated life
- CCT:2700-5000K
- PIR Sensor Function Available
- 5 years manufacturer warranty





## SPECIFICATION

TYPE	D556-90-CCT-WH-MS	D236D-90-CCT-WH
WATTAGE	15W	15W
LUMEN	1135.9 lm	1218.3 lm
EFFICACY	> 75 lm/W	> 80 lm/W
CCT	2700K,3000K,3500K,4000K,5000K	
CRI	> 90	
INPUT VOLTAGE	AC120V	
LIGHTING ANGLE	114	
DIMMABLE	Non-dimmable	
LED TYPE	SMD2835	
CERTIFICATE	UL,Energy Star	UL,Energy Star
TIME ADJUSTABLE	1min/5min/10min	none
DESCRIPTION	PIR Sensor and CCT Adjustable (5-6")	CCT Adjustable (5-6")
LIFE TIME	50000 hours	
WARRANTY	5 year limited	

# LED DISK DOWN LIGHT

Wattages: 15W


## DIMENSION

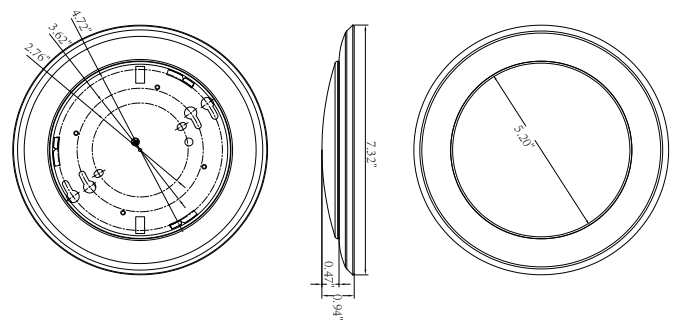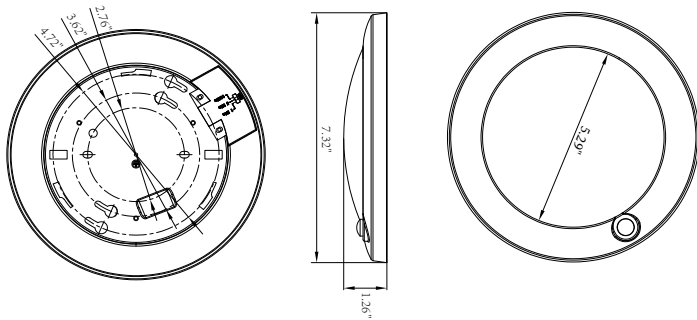

WATTAGE	D556-90-CCT-WH-MS
NT. WEIGHT	1.01 lbs
OUTER BOX	21.26" x 15.75" x 8.07" (20 pcs)

WATTAGE	D236D-90-CCT-WH
NT. WEIGHT	0.84 lbs
OUTER BOX	17.32" x 15.59" x 7.99" (20 pcs)

## STANDARD ACCESSORIES



SPRING CARD BUCKLE



INSTALL SCREWS AND TERMINALS



E27 LAMP HOLDER

## ORDERING INFORMATION

EXAMPLE:


**D556-90-CCT-WH-MS/D236D-90-CCT-WH**

D	556	90	CCT	WH	MS
PRODUCT	NUMBER	CRI	CCT	FINISH	CONTROL
D LED DISK DOWN LIGHT	556 - (556) 236 - (236)	90 CRI=90	CCT CCT Adjustable	WH - (White)	MS - (PRI Sensor)


# LED DISK DOWN LIGHT

Wattages: 15W

## INDUCTION RANGE:

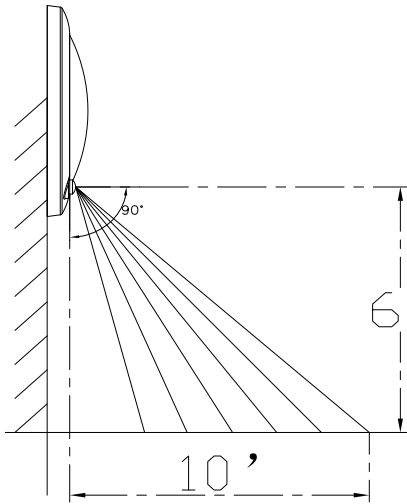

Hanging installation:  
The mounting height is 6 feet  
and the sensing distance is 10 feet  
sensing range 90 degrees




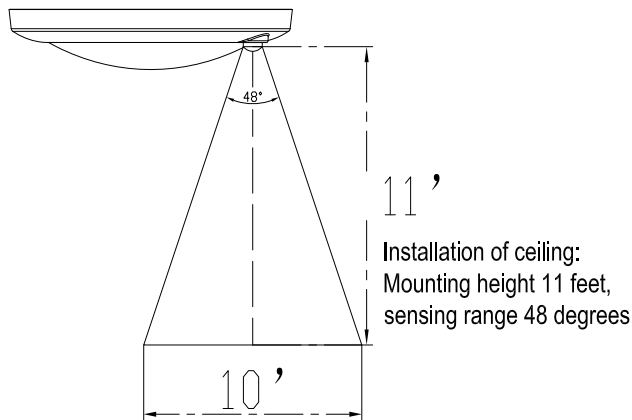


Installation of ceiling:  
Mounting height 11 feet,  
sensing range 48 degrees

## PHOTOMETRICS

For complete IES files, please visit our website.

### D556-90-CCT-WH-MS

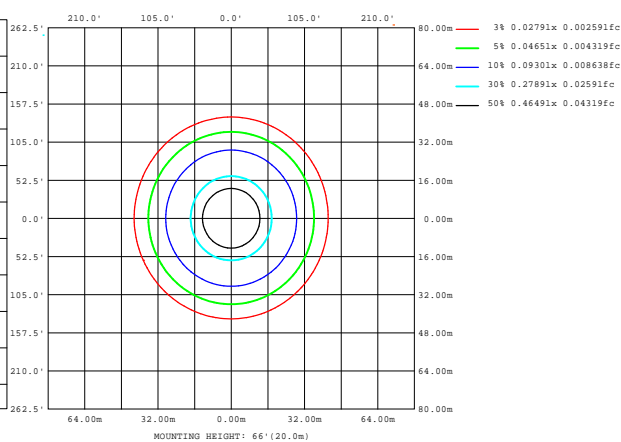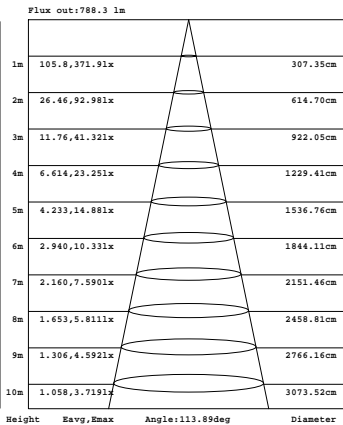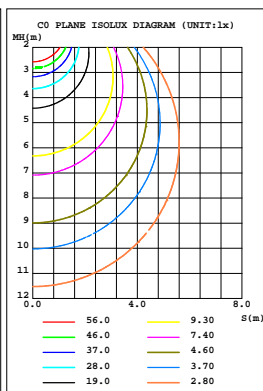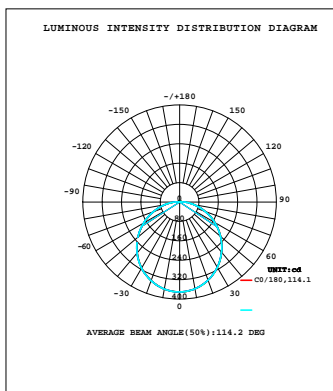

### D236D-90-CCT-WH

