

# E-1 LED Low Profile, Thermoplastic Emergency Light

<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	



## STANDARD



## OPTIONAL

### ILLUMINATION

- Adjustable long lasting, efficient, ultra bright white LED lamp heads.
- One, 0.5W white LED per lamp head.
- Unique all-inclusive lamp, reflector and lens assembly.

### ELECTRICAL

- Dual 120/277 voltage standard. Optional dual 120/230 voltage available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Surface mount back plate fits most standard size junction boxes and snaps into place.
- Suitable for wall or ceiling mount.

### HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.


### OPTIONS

- SPV: UL Listed for special voltage option.
- HL: Provides increased center-to-center spacing (2.0W per head).
- RC: Remote capacity of up to 1.0 watt.

### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- UL Listed for damp locations (0°C – 30°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

### DIMENSIONS

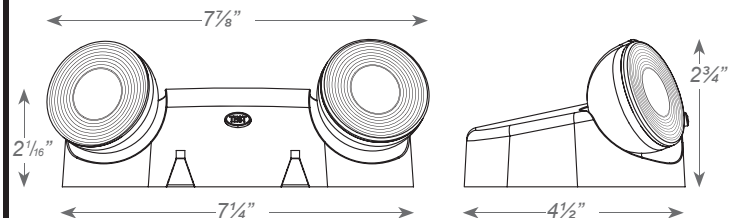

### ORDERING INFORMATION

Sample Part Number: E-1

MODEL	HOUSING COLOR	OPTIONS
E-1	(blank) White	RC Remote Capacity <sup>1</sup>
	B Black	SPV 120/230 Volt 50/60Hz
		HL High Lumen LED <sup>1</sup>

#### NOTES:

<sup>1</sup> -HL and -RC options cannot be combined. 0.5W of remote capacity available standard with -HL option

