

EZR XTEU Compact Thermoplastic Exit Sign

Project:	
Type:	
Catalog #:	

STANDARD



OPTIONAL



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out chevron directional indicators.


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.
- 2C-120V/2C-277V: Voltage-specific Dual circuit option on the AC-only unit enables it to be connected to two different power supplies at the same time.
- Custom: Signs available with requested 'special' wording.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in USA" under the Buy American Act.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

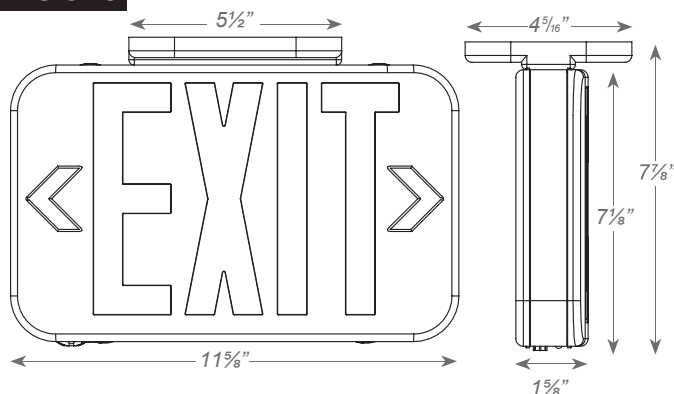

ORDERING INFORMATION

Sample Part Number: EZRXTEU2RWEM

SALIDA face plate option available. Check with your Best Lighting Representative.

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
EZR XTEU	2 Universal Single/ Double Face	R Red	W White	(blank) AC Only	SDT Self-Diagnostics ^{2,3}
		G Green	B Black	EM	2C-120 Dual Circuit with 120V input ⁴
		RG Red/Green ¹			2C-277 Dual Circuit with 277V input ⁴
					Custom Custom Wording
					USA Assembled in the USA

¹ Field selectable

² Available only with EM units.

³ Not available with RG units.

⁴ Available only with AC-only units

EZR_XTEU Compact Thermoplastic Exit Sign

Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EZR _X TEU-RED/GREEN EM	1.0	1.0	0.1	0.1
EZR _X TEU-RED SDT	2.5	2.5	0.05	0.05
EZR _X TEU-GREEN SDT	2.7	2.7	0.05	0.05