

# LED Wall Pack light

Wattages: 15W,25W



**CCT**  
SELECTABLE



The Wall Pack LED Lighting Series can be widely used for Indoor or Outdoor (Wet Location) Excellent for Museums, Art Galleries, Shopping Malls, Office Buildings, Walls and many other applications.



## Features:

- Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V.
- Die Cast aluminium cooling design, high quality and better cooling for LED Tj < 85°C.
- Excellent Optics design, greatly improve the light utilization and evenness.
- The 1-10V Dimming type is continuous.

## Packaging information:

### ❖WSD-WP015W27-345K:

Carton Size:545mmX230mmX285mm  
21.46"x9.06"x11.22" (12Pcs/CTN)

### ❖WSD-WP025W27-345K:


Carton Size:545mmX230mmX285mm  
21.46"x9.06"x11.22" (12Pcs/CTN)

| SPECIFICATION     |                   |         |         |                   |         |         |
|-------------------|-------------------|---------|---------|-------------------|---------|---------|
| TYPE              | WSD-WP015W27-345K |         |         | WSD-WP025W27-345K |         |         |
| WATTAGE           | 15W               |         |         | 25W               |         |         |
| CCT               | 3000K             | 4000K   | 5000K   | 3000K             | 4000K   | 5000K   |
| LUMEN             | 2130 lm           | 2246 lm | 2218 lm | 3423 lm           | 3656 lm | 3571 lm |
| EFFICACY          | > 150 lm/W        |         |         |                   |         |         |
| CRI               | > 70              |         |         |                   |         |         |
| INPUT VOLTAGE     | AC120-277V        |         |         |                   |         |         |
| LIGHTING ANGLE    | 112.4°X105.3°     |         |         |                   |         |         |
| FACTORY SETTINGS  | 4000K             |         |         |                   |         |         |
| LED TYPE          | 2835              |         |         |                   |         |         |
| PF                | > 0.95            |         |         |                   |         |         |
| DRIVER EFFICIENCY | > 89%             |         |         |                   |         |         |
| PROTECTION LEVEL  | WET               |         |         |                   |         |         |
| LIFE TIME         | > 50000 hours     |         |         |                   |         |         |
| WARRANTY          | 5 year limited    |         |         |                   |         |         |

# LED Wall Pack light

Wattages: 15W,25W

## DIMENSION:

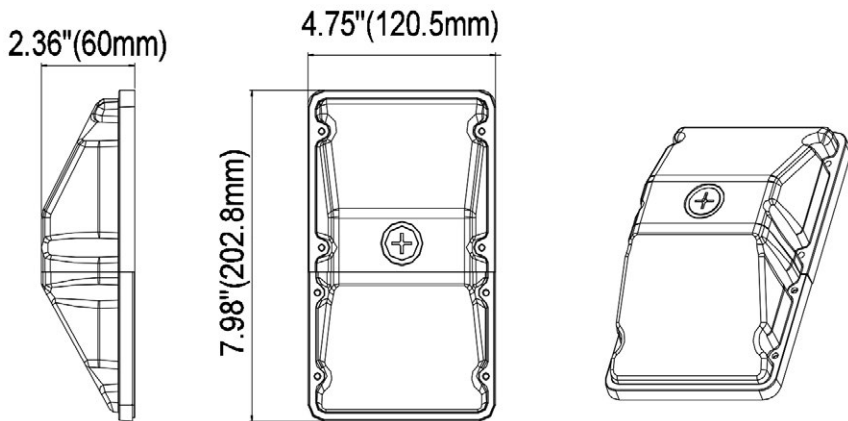

15W/25W

## Specifications:

Shell materials: Aluminum & PC.  
 Net weight : 1.26 lbs  
 Finish: Dark Bronze(Standard)  
 Product Size:202.8mmX120.5mmX60mm  
 7.98"X4.75"X2.36"

## Control Module:

The LED Wall Pack light can adjust the color temperature of the whole lamp, which is convenient and fast. The color temperature can be selected according to the actual needs of customers.



**CCT**  
SELECTABLE



## ORDERING INFORMATION:

### EXAMPLE:

WSD-WP015W27-345K-Z[D,W,B,S]-Y[Blank,P] / WSD-WP025W27-345K-Z[D,W,B,S]-Y[Blank,P]

| WSD         | WP                 | 015                    | 27               | 345K                      | Z  | Y             |
|-------------|--------------------|------------------------|------------------|---------------------------|--|---------------|
| COMPANY     | PRODUCT            | POWER                  | VOLTAGE          | CCT                       | FINISH   | CONTROL       |
| WSD LED INC | WP Wall Pack light | 015 (15W)<br>025 (25W) | 27<br>AC120-277V | 345K<br>3000K/4000K/5000K | D (Dark Bronze)<br>W (White)<br>B (Black)<br>S (Silvery) | P (Photocell) |


# LED Wall Pack light

Wattages: 15W,25W

## PHOTOMETRICS:

For complete IES files, please visit our website.

### WSD-WP015W27-345K (3000K)

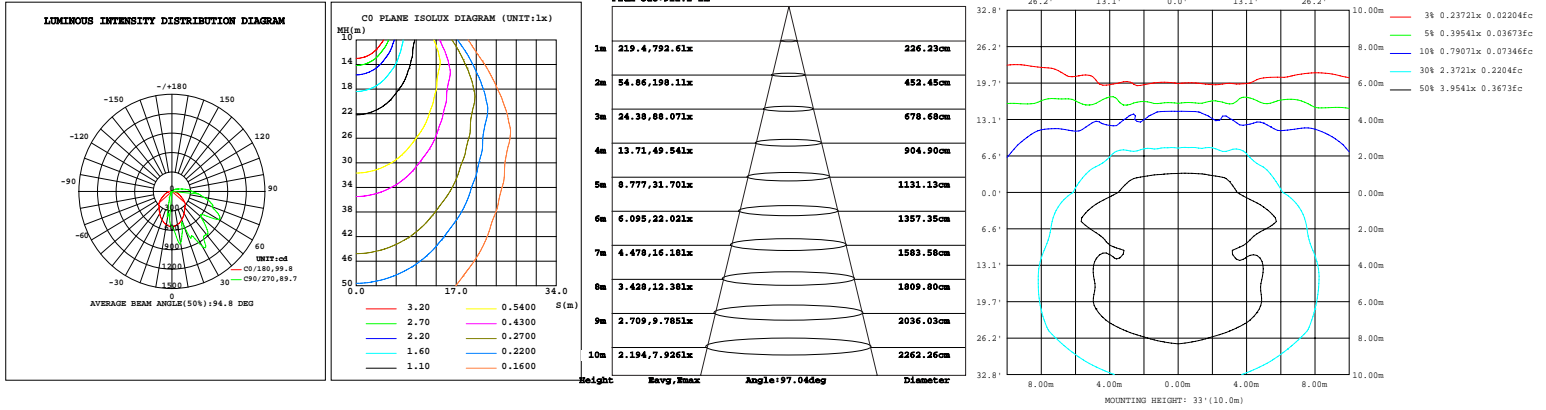

### WSD-WP025W27-345K (3000K)

