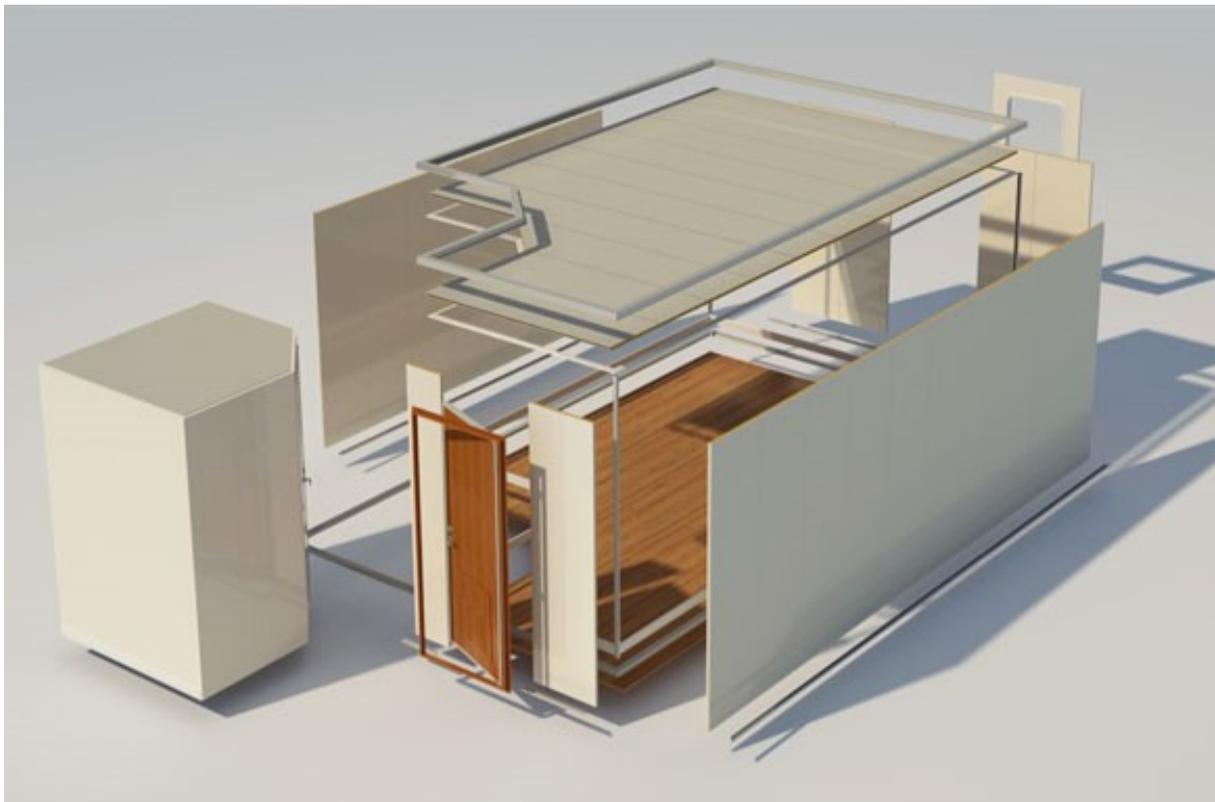




# Marine Accommodation Products

## Product Guide 2019



“Providing quality Approved marine accommodation products from stock”

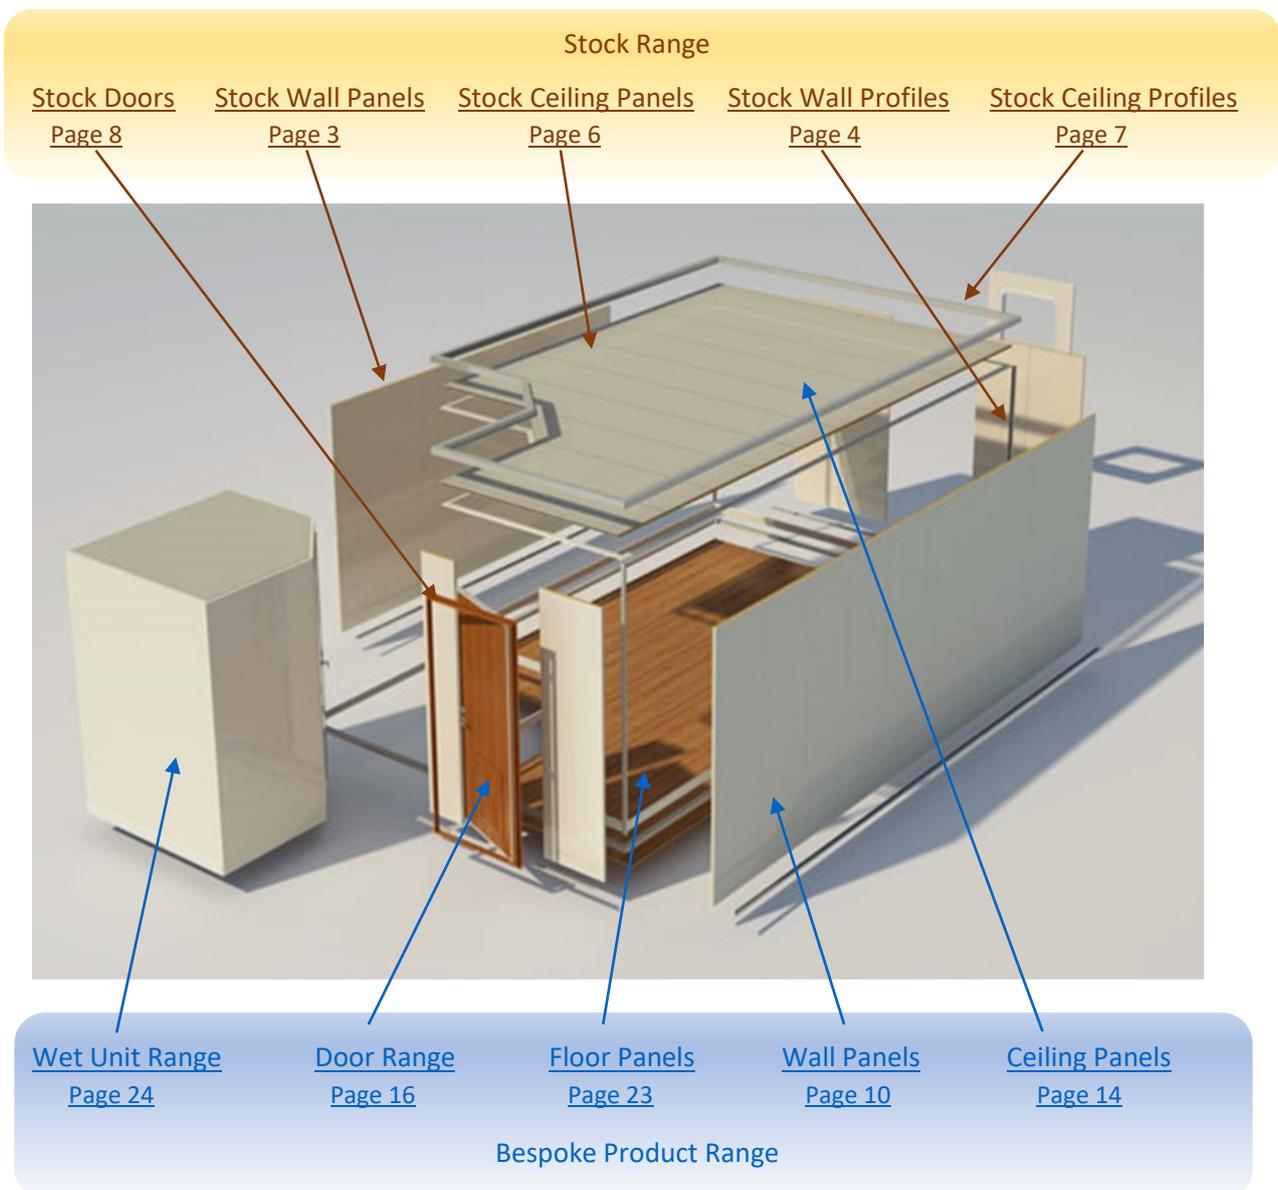
Version v0.1a April 2019

## Introduction

With over 10 years' experience providing high quality marine accommodation materials to customers worldwide, 4SEA Materials B.V., in conjunction with international partners, have identified and established a stock of IMO Approved products for immediate dispatch from our warehouse in Holland.

In addition to our stock range, we can bespoke manufacture our products to individual customer specifications.


All of our products are supplied with a Marine Equipment Directive (MED) Approval and are covered by our 12-month warranty.













## Stock Products

### Stock Wall Panels








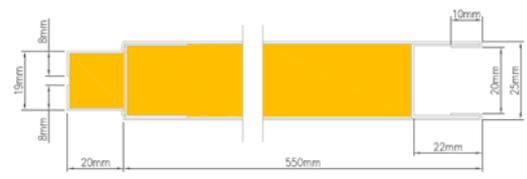
<p>Type 'A' Partition Panel</p>  	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Panel:</td> <td><b>JCP-B3 Partition</b></td> </tr> <tr> <td>Type:</td> <td>Type 'A' T&amp;G Joint</td> </tr> <tr> <td>Fire Class:</td> <td>B15</td> </tr> <tr> <td>Thickness:</td> <td>50mm</td> </tr> <tr> <td>Height:</td> <td>2200mm</td> </tr> <tr> <td>Width:</td> <td>550mm</td> </tr> <tr> <td>Weight:</td> <td>18.6kg/m<sup>2</sup></td> </tr> <tr> <td>Sound Reduction:</td> <td>35dB</td> </tr> <tr> <td>Finish:</td> <td>Gislaved 027-1058 (White) Both Faces</td> </tr> </table>	Panel:	<b>JCP-B3 Partition</b>	Type:	Type 'A' T&G Joint	Fire Class:	B15	Thickness:	50mm	Height:	2200mm	Width:	550mm	Weight:	18.6kg/m <sup>2</sup>	Sound Reduction:	35dB	Finish:	Gislaved 027-1058 (White) Both Faces
Panel:	<b>JCP-B3 Partition</b>																		
Type:	Type 'A' T&G Joint																		
Fire Class:	B15																		
Thickness:	50mm																		
Height:	2200mm																		
Width:	550mm																		
Weight:	18.6kg/m <sup>2</sup>																		
Sound Reduction:	35dB																		
Finish:	Gislaved 027-1058 (White) Both Faces																		

<p>Type 'A' Lining Panel</p>  	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Panel:</td> <td><b>JCP-L3 Lining</b></td> </tr> <tr> <td>Type:</td> <td>Type 'A' T&amp;G Joint</td> </tr> <tr> <td>Fire Class:</td> <td>B15</td> </tr> <tr> <td>Thickness:</td> <td>25mm</td> </tr> <tr> <td>Height:</td> <td>2200mm</td> </tr> <tr> <td>Width:</td> <td>550mm</td> </tr> <tr> <td>Weight:</td> <td>15.2kg/m<sup>2</sup></td> </tr> <tr> <td>Sound Reduction:</td> <td>31dB</td> </tr> <tr> <td>Finish:</td> <td>Gislaved 027-1058 (White) Galvanised Steel Reverse</td> </tr> </table>	Panel:	<b>JCP-L3 Lining</b>	Type:	Type 'A' T&G Joint	Fire Class:	B15	Thickness:	25mm	Height:	2200mm	Width:	550mm	Weight:	15.2kg/m <sup>2</sup>	Sound Reduction:	31dB	Finish:	Gislaved 027-1058 (White) Galvanised Steel Reverse
Panel:	<b>JCP-L3 Lining</b>																		
Type:	Type 'A' T&G Joint																		
Fire Class:	B15																		
Thickness:	25mm																		
Height:	2200mm																		
Width:	550mm																		
Weight:	15.2kg/m <sup>2</sup>																		
Sound Reduction:	31dB																		
Finish:	Gislaved 027-1058 (White) Galvanised Steel Reverse																		

### Stock Partition Panel Profiles


<p><b>FB02(T) Top Profile</b></p> 		<p>Length: 3000mm          Thickness: 1mm          Weight: 0.94 Kg/m          Finish: Galvanised Steel          Notes:          1. Supplied with 5mm Diameter Holes at 375mm Spacing</p>
<p><b>FB02(B) Bottom Profile</b></p> 		<p>Length: 3000mm          Thickness: 1mm          Weight: 0.94 Kg/m          Finish: Galvanised Steel          Notes:          1. Supplied with 5mm Diameter Holes at 375mm Spacing</p>
<p><b>FB08 End Profile</b></p> 		<p>Length: 2200mm          Thickness: 0.6mm          Weight: 0.57 Kg/m          Finish: PVC Foil          Stock Finish: Gislaved 027-1058 (White)</p>
<p><b>FB07 Internal Angle Profile</b></p> 		<p>Length: 2200mm          Thickness: 0.6mm          Weight: 0.49 Kg/m          Finish: PVC Foil          Stock Finish: Gislaved 027-1058 (White)</p>
<p><b>FB09 External Angle Profile</b></p> 		<p>Length: 2200mm          Thickness: 0.6mm          Weight: 0.99 Kg/m          Finish: PVC Foil          Stock Finish: Gislaved 027-1058 (White)</p>

### Stock Lining Panel Profiles

<p><b>FL08(T) Top Profile</b></p> 		<p>Length: 3000mm          Thickness: 1mm          Weight: 0.75 Kg/m          Finish: Galvanised Steel</p> <p>Notes          1. Supplied with 5mm Diameter Holes at 375mm Spacing</p>
<p><b>FL08(B) Bottom Profile</b></p> 		<p>Length: 3000mm          Thickness: 1mm          Weight: 0.75 Kg/m          Finish: Galvanised Steel</p> <p>Notes          1. Supplied with 5mm Diameter Holes at 375mm Spacing</p>
<p><b>FL14 End Profile</b></p> 		<p>Length: 2200mm          Thickness: 0.6mm          Weight: 0.45 Kg/m          Finish: PVC Foil          Stock Finish: Gislaved 027-1058 (White)</p>
<p><b>FL13 Corner Profile</b></p> 		<p>Length: 2200mm          Thickness: 0.6mm          Weight: 0.92 Kg/m          Finish: PVC Foil          Stock Finish: Gislaved 027-1058 (White)</p>


## Stock Ceiling Panels
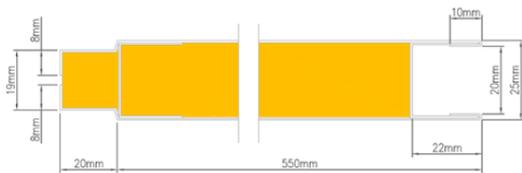
### Ceiling Panels – JCP-C2, Tongue & Groove







Panel:	<b>JCP-C2 Self Supporting Ceiling</b>
Fire Class:	B15
Thickness:	25mm
Length:	1000mm (Stock) 2400mm (Stock)
Width:	550mm
Weight:	15.7kg/m <sup>2</sup>
Sound Reduction:	30dB
Finish:	Gislaved 027-1058 (White)

### Ceiling Panels – JCP-C9, Hook Joint

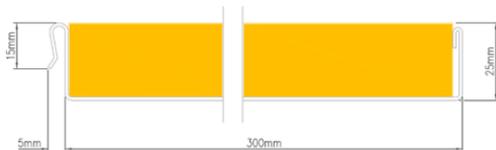

Panel:	<b>JCP-C9 Hook Joint Ceiling</b>
Fire Class:	B0
Thickness:	25mm
Length:	2200mm (Stock) 2400mm (Stock)
Width:	300mm
Weight:	8.7kg/m <sup>2</sup>
Sound Reduction:	30dB
Finish:	Gislaved 027-1058 (White)

### Stock Ceiling Panel Profiles
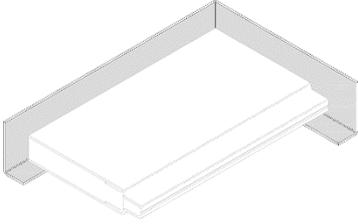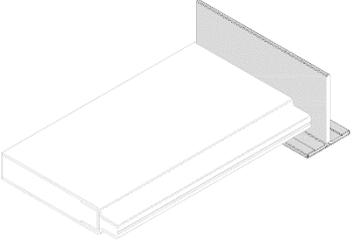
<p><b>FC02 Perimeter Profile</b></p> 		<p>Length: 3000mm          Thickness: 1mm          Weight: 0.57 Kg/m          Finish: PVC Foil          Stock Finish: Gislaved 027-1058 (White)</p>
<p><b>FC03 Hanger Profile</b></p> 		<p>Length: 3000mm          Thickness: 1.2mm + 0.6mm          Weight: 2.05 Kg/m          Finish: PVC Foil          Stock Finish: Gislaved 027-1058 (White)</p>

## Stock Doors

B15 Cabin Door



Door:	<b>CGFM-3</b>
Type:	Single Leaf
Fire Class:	B15
Clear Opening Height:	1950mm
Clear Opening Width:	600mm
Sill:	20mm
Handing:	R.I. and L.I.
Door Leaf Thickness:	40mm
Weight:	60kg
Sound Reduction:	32dB
Finish	
Door Leaf:	Gislaved 027-1058 (White)
Frame:	RAL 9010
Hardware:	C-1 Lock (Key & Thumbturn)

B15 Cabin WC Door



Door:	<b>CGFM-3</b>
Type:	Single Leaf
Fire Class:	B15
Clear Opening Height:	1800mm
Clear Opening Width:	600mm
Sill:	120mm
Handing:	R.I. and L.I.
Door Leaf Thickness:	40mm
Weight:	60kg
Sound Reduction:	32dB
Finish	
Door Leaf:	Gislaved 027-1058 (White)
Frame:	RAL 9010
Hardware:	C-4 Lock (Thumbturn & Indicator)

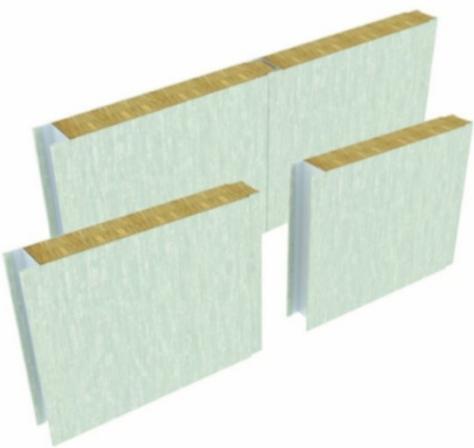
Stock Doors (continued)

<p><b>B15 Public WC Door</b></p> 	<p>Door: <b>CGFM-3</b></p> <p>Type: Single Leaf</p> <p>Fire Class: B15</p> <p>Clear Opening Height: 1800mm</p> <p>Clear Opening Width: 600mm</p> <p>Sill: 0mm</p> <p>Handing: R.I. and L.I.</p> <p>Door Leaf Thickness: 40mm</p> <p>Weight: 55kg</p> <p>Sound Reduction: 32dB</p> <p>Finish</p> <p>Door Leaf: Gislaved 027-1058 (White)</p> <p>Frame: RAL 9010</p> <p>Hardware: C-4 Lock (Thumbturn &amp; Indicator)</p>
---------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<p><b>B15 Access Hatch</b></p> 	<p>Door: <b>HL-BJXM-A</b></p> <p>Type: Single Leaf</p> <p>Fire Class: B15</p> <p>Clear Opening Height: 1200mm</p> <p>Clear Opening Width: 400mm</p> <p>Sill: n/a</p> <p>Door Leaf Thickness: 40mm</p> <p>Weight: -</p> <p>Sound Reduction: -</p> <p>Finish</p> <p>Door Leaf: Gislaved 027-1058 (White)</p> <p>Frame: RAL 9010</p> <p>Hardware: Triangle Lock</p>
--------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

## Bespoke Product Range

### Bespoke Wall Panel Range

<p>Type 'A' Tongue &amp; Groove Joint</p> 	<p>Panel: <b>JCP-B3 Partition</b> <b>JCP-L3 Lining</b></p> <p>Type: Type A T&amp;G Joint</p> <p>Fire Class: B15</p> <p>Thickness: 50mm &amp; 25mm</p> <p>Height: Partition 2460mm (max) Lining 2980mm (max)</p> <p>Width: 550mm</p> <p>Weight: 18.6 &amp; 15.7kg/m<sup>2</sup></p> <p>Sound Reduction: 35 &amp; 32dB</p> <p>Finish Options: PVC RAL Paint Galvanised Steel Stainless Steel</p> <p>Notes 1. Also available with A30 and B0 Fire Ratings.</p>
<p>Type 'C' Clip Joint</p> 	<p>Panel: <b>JCP-B1 Partition</b> <b>JCP-L1 Lining</b></p> <p>Type: Type C Clip Joint</p> <p>Fire Class: B15</p> <p>Thickness: 50mm &amp; 30mm</p> <p>Height: Partition 2460mm (max) Lining 2980mm (max)</p> <p>Width: 550mm</p> <p>Weight: 18.4 &amp; 15.9kg/m<sup>2</sup></p> <p>Sound Reduction: 35 &amp; 33dB</p> <p>Finish Options: PVC RAL Paint Galvanised Steel Stainless Steel</p> <p>Notes 1. Also available with A60, A30 and B0 Fire Ratings.</p>


Bespoke Wall Panel Range (continued)

Cable Conduit Panels	
	<p>Panel: <b>JCP-B (D) Partition</b></p> <p>Type: Type A T&amp;G Joint Type C Clip Joint</p> <p>Fire Class: B15</p> <p>Thickness: 50mm</p> <p>Height: 2460mm (max)</p> <p>Width: 550mm</p> <p>Weight: 17.9kg/m<sup>2</sup></p> <p>Sound Reduction: -</p> <p>Finish Options: PVC RAL Paint Galvanised Steel Stainless Steel</p>

Aluminium Honeycomb Panels	
	<p>Panel: <b>JCP-L2-L Lining</b></p> <p>Type: Type C Clip Joint</p> <p>Fire Class: B0</p> <p>Thickness: 25mm</p> <p>Height: 2500mm (max)</p> <p>Width: 550mm</p> <p>Weight: 10.9kg/m<sup>2</sup></p> <p>Sound Reduction: 30dB</p> <p>Finish Options: PVC RAL Paint Aluminium</p> <p>Notes</p> <ol style="list-style-type: none"> <li>1. Other arrangements and Fire Ratings available.</li> </ol>


Bespoke Wall Panel Range (continued)

Acoustic Panels	
	<p>Panel: <b>JCP-B (G) Partition</b></p> <p>Type: Type A T&amp;G Joint Type C Clip Joint</p> <p>Fire Class: B15</p> <p>Thickness: 50mm</p> <p>Height: 2460mm (max)</p> <p>Width: 550mm</p> <p>Weight: 21.9kg/m<sup>2</sup></p> <p>Sound Reduction: 45dB</p> <p>Finish Options: PVC RAL Paint Galvanised Steel Stainless Steel</p>

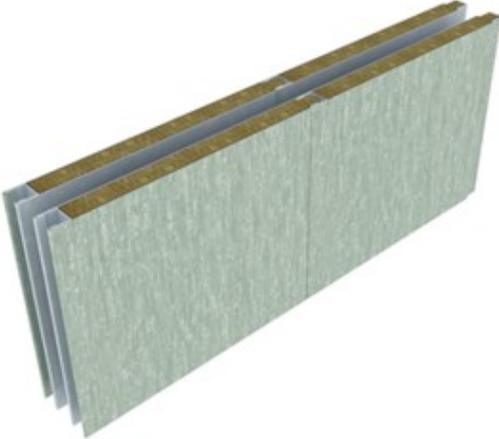Acoustic Double Panels	
	<p>Panel: <b>JCP-AL Partition</b></p> <p>Type: Type A T&amp;G Joint</p> <p>Fire Class: A30</p> <p>Thickness: 25 + 25 + 25mm</p> <p>Height: 2460mm (max)</p> <p>Width: 550mm</p> <p>Weight: 32.3kg/m<sup>2</sup></p> <p>Sound Reduction: 46dB</p> <p>Finish Options: PVC RAL Paint Galvanised Steel Stainless Steel</p>


Bespoke Wall Panel Range (continued)

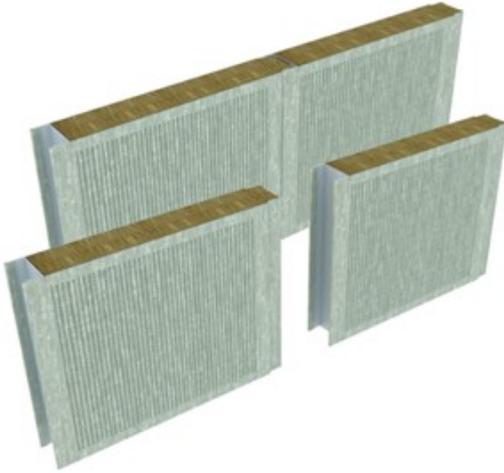Acoustic Perforated Panels



Panel:	<b>JCP-L4 Lining Panels</b>
Type:	Type A T&G Joint
Fire Class:	B15
Thickness:	25mm
Height:	2980mm (max)
Width:	550mm
Weight:	13.6kg/m <sup>2</sup>
Sound Reduction:	NRC = 0.65
Finish Options:	PVC RAL Paint Galvanised Steel Stainless Steel

### Bespoke Ceiling Panel Range
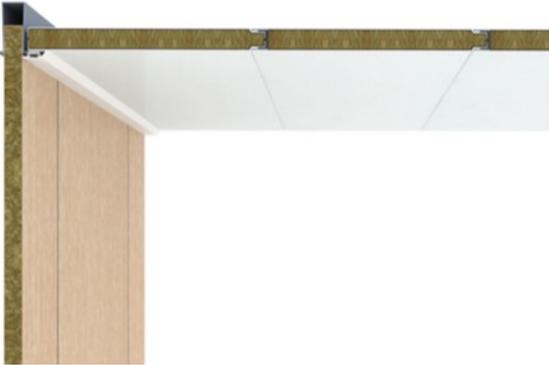
<p>Ceiling Panels – JCP-C2, Tongue &amp; Groove</p> 	<p>Panel: <b>JCP-C2 Self Supporting Ceiling</b></p> <p>Fire Class: B15</p> <p>Thickness: 25mm</p> <p>Length: 2460mm (max)</p> <p>Width: 550mm</p> <p>Weight: 15.7kg/m<sup>2</sup></p> <p>Sound Reduction: 32dB</p> <p>Finish Options: PVC RAL Paint Stainless Steel</p>
---------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<p>Ceiling Panels – JCP-C9, Hook Joint</p> 	<p>Panel: <b>JCP-C9 Hook Joint Ceiling</b></p> <p>Fire Class: B0</p> <p>Thickness: 25mm</p> <p>Length: 2400mm (max)</p> <p>Width: 300mm</p> <p>Weight: 8.7kg/m<sup>2</sup></p> <p>Sound Reduction: 30dB</p> <p>Finish Options: PVC RAL Paint Stainless Steel</p>
--------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Bespoke Ceiling Panel Range (continued)

<p>Type D Ceiling Panel</p> 	<p>Panel: <b>JCP-C6B Strip Ceiling</b></p> <p>Fire Class: B15</p> <p>Thickness: 25 + 25mm</p> <p>Length: 2400mm (max)</p> <p>Width: 275 + 25mm</p> <p>Weight: 11.7kg/m<sup>2</sup></p> <p>Sound Reduction: 35dB</p> <p>Finish Options: PVC RAL Paint Stainless Steel</p>
---------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<p>Square Ceiling Panel</p> 	<p>Panel: <b>JCP-C7 Square Ceiling Panels</b></p> <p>Fire Class: B0 &amp; B15</p> <p>Thickness: 25 &amp; 50mm</p> <p>Length: 600mm</p> <p>Width: 600mm</p> <p>Weight: 7.9 &amp; 9.7kg/m<sup>2</sup></p> <p>Sound Reduction: 30 &amp; 35dB</p> <p>Finish Options: PVC RAL Paint Stainless Steel</p>
-----------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

## Bespoke Door Range

### A60 Single Door



Door:	<b>CGFM-1</b>
Type:	Single Leaf
Fire Class:	A60
Clear Opening Height:	2400mm (max)
Clear Opening Width:	1200mm (max)
Door Leaf Thickness:	40mm
Weight:	-
Sound Reduction:	36dB
Finish Options:	PVC RAL Paint Galvanised Steel Stainless Steel

#### Notes

1. Available with Vision Panel 400 x 400mm (max).
2. Available with Hose Port 150 x 150mm (max).
3. Available with Kick Out Panel 540 x 440mm (max).

### A60 Double Door



Door:	<b>CGFM-1E</b>
Type:	Double Leaf
Fire Class:	A60
Clear Opening Height:	2250mm (max)
Clear Opening Width:	2000mm (max)
Door Leaf Thickness:	57mm
Weight:	-
Sound Reduction:	30dB
Finish Options:	PVC RAL Paint Galvanised Steel Stainless Steel

#### Notes

1. Available with Vision Panel 400 x 400mm (max).
2. Available with Hose Port 150 x 150mm (max).

Bespoke Door Range (continued)

A60 Single Door Weathertight & Gastight



Door: **CGFM-1F**  
 Type: Single Leaf  
 Fire Class: A60  
 Clear Opening Height: 2750mm (max)  
 Clear Opening Width: 1200mm (max)  
 Door Leaf Thickness: 40mm  
 Weight: -  
 Sound Reduction: 35dB  
 Finish Options: PVC  
 RAL Paint  
 Galvanised Steel  
 Stainless Steel

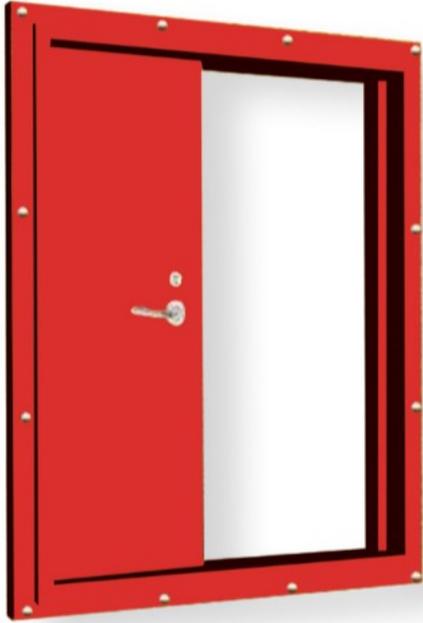
A60 Double Door Weathertight & Gastight



Door: **CGFM-1G**  
 Type: Double Leaf  
 Fire Class: A60  
 Clear Opening Height: 2750mm (max)  
 Clear Opening Width: 2400mm (max)  
 Door Leaf Thickness: 57mm  
 Weight: -  
 Sound Reduction: 33dB  
 Finish Options: PVC  
 RAL Paint  
 Galvanised Steel  
 Stainless Steel

Bespoke Door Range (continued)

A60 Single Leaf Sliding Door



Door:	<b>CGFM-YM</b>
Type:	Single Leaf
Fire Class:	A60 (ABS Approval Only)
Clear Opening Height:	2400mm (max)
Clear Opening Width:	1800mm (max)
Door Leaf Thickness:	60mm
Weight:	-
Sound Reduction:	-
Finish Options:	PVC RAL Paint Galvanised Steel Stainless Steel

A0/A15 Single Door



Door:	<b>CGFM-2</b>
Type:	Single Leaf
Fire Class:	A0 / A15
Clear Opening Height:	2400mm (max)
Clear Opening Width:	1200mm (max)
Door Leaf Thickness:	40mm
Weight:	-
Sound Reduction:	36dB
Finish Options:	PVC RAL Paint Galvanised Steel Stainless Steel

Bespoke Door Range (continued)

B30 Single Door



Door: **CGFM-3X**  
 Type: Single Leaf  
 Fire Class: B30  
 Clear Opening Height: 2100mm (max)  
 Clear Opening Width: 950mm (max)  
 Door Leaf Thickness: 40mm  
 Weight: -  
 Sound Reduction: -  
 Finish Options: PVC  
 RAL Paint  
 Galvanised Steel  
 Stainless Steel

Notes

1. Available with Vent (upper or lower position)

B15 Cabin Door



Door: **CGFM-3**  
 Type: Single Leaf  
 Fire Class: B15  
 Clear Opening Height: 2100mm (max)  
 Clear Opening Width: 950mm (max)  
 Door Leaf Thickness: 40mm  
 Weight: -  
 Sound Reduction: 39dB  
 Finish Options: PVC  
 RAL Paint  
 Galvanised Steel  
 Stainless Steel

Notes

1. Available with Vision Panel 400 x 400mm (max).
2. Available with Hose Port 150 x 150mm (max).
3. Available with Kick Out Panel 540 x 440mm (max).
4. Available with integrated Vent.

Bespoke Door Range (continued)

B15 Double Door



**Door:** **CGFM-3A**  
**Type:** Double Leaf  
**Fire Class:** B15  
**Clear Opening Height:** 2100mm (max)  
**Clear Opening Width:** 1900mm (max)  
**Door Leaf Thickness:** 40mm  
**Weight:** -  
**Sound Reduction:** 30dB  
**Finish Options:** PVC  
 RAL Paint  
 Galvanised Steel  
 Stainless Steel

Notes

1. Available with Vision Panel 400 x 400mm (max).
2. Available with Hose Port 150 x 150mm (max).
3. Available with Kick Out Panel 540 x 440mm (max).
4. Available with integrated Vent.

B15 Access Hatch



**Door:** **HLJRT**  
**Type:** Single Leaf  
**Fire Class:** B15  
**Clear Opening Height:** 1900mm (max)  
**Clear Opening Width:** 800mm (max)  
**Door Leaf Thickness:** 23mm  
**Weight:** -  
**Sound Reduction:** -  
**Finish Options:** PVC  
 RAL Paint  
 Galvanised Steel  
 Stainless Steel

Bespoke Door Range (continued)

B15 Double Leaf Access Hatch



**Door:** **HLDJRT**  
**Type:** Double Leaf  
**Fire Class:** B15  
**Clear Opening Height:** 1950mm (max)  
**Clear Opening Width:** 1900mm (max)  
**Door Leaf Thickness:** 42mm  
**Weight:** -  
**Sound Reduction:** -  
**Finish Options:** PVC  
 RAL Paint  
 Galvanised Steel  
 Stainless Steel

B15 Single Leaf Ceiling Hatch




**Door:** **HL-TJXM-A**  
**Type:** Single Leaf  
**Fire Class:** B15  
**Clear Opening Length:** 800mm (max)  
**Clear Opening Width:** 450mm (max)  
**Door Leaf Thickness:** 40mm  
**Weight:** -  
**Sound Reduction:** -  
**Finish Options:** PVC  
 RAL Paint  
 Galvanised Steel  
 Stainless Steel



### Optional Door Equipment

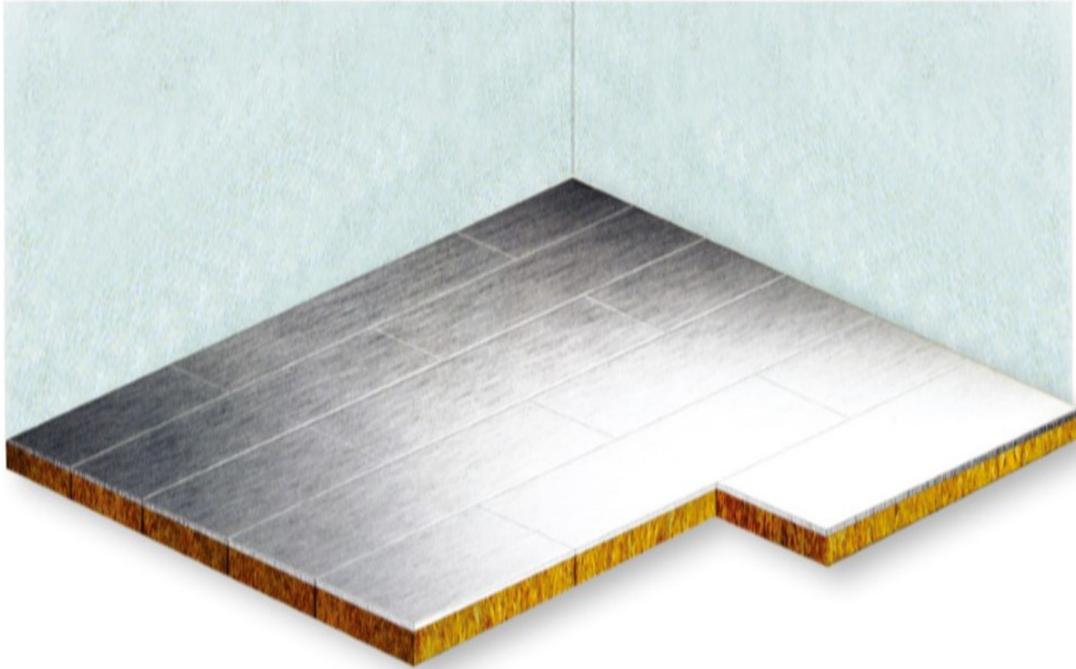Door Closer		
Kick-out Panel		<p>Max Dimensions            Height: 540mm            Width: 440mm</p>
Vent Grill		
Hose Port		<p>Max Dimensions            Height: 150mm            Width: 150mm</p>
Door Holdback		
Vision Panel		<p>Max Dimensions            Height: 400mm            Width: 400mm            Diameter: 250mm</p>


## Bespoke Floating Floor Panels



Panel:	JCP-DF2 Floor Panels
Fire Class:	A60
Thickness:	52.5mm
Length:	1950mm
Width:	450mm
Weight:	28.2kg/m <sup>2</sup>
Sound Reduction:	59dB
Finish Options:	Galvanised Steel Stainless Steel

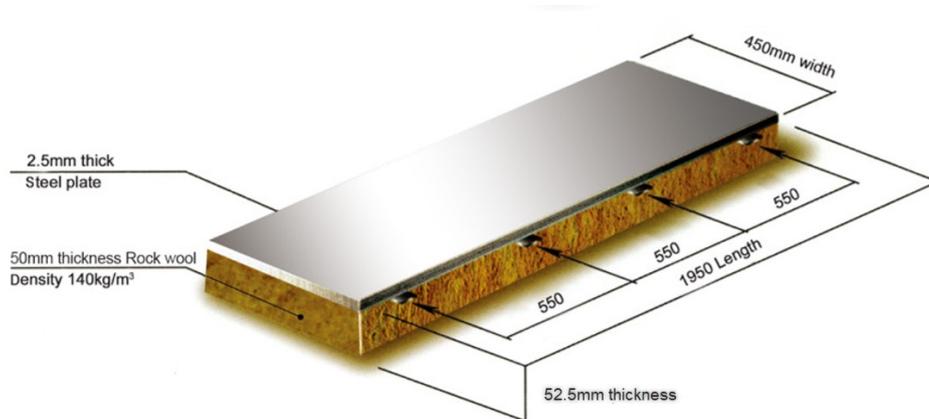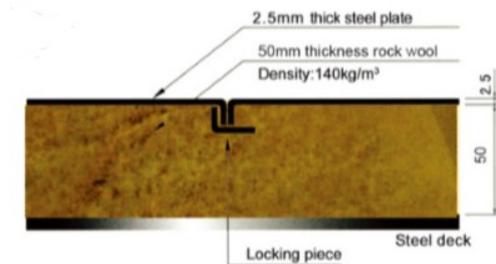

## Bespoke Prefabricated Wet Units

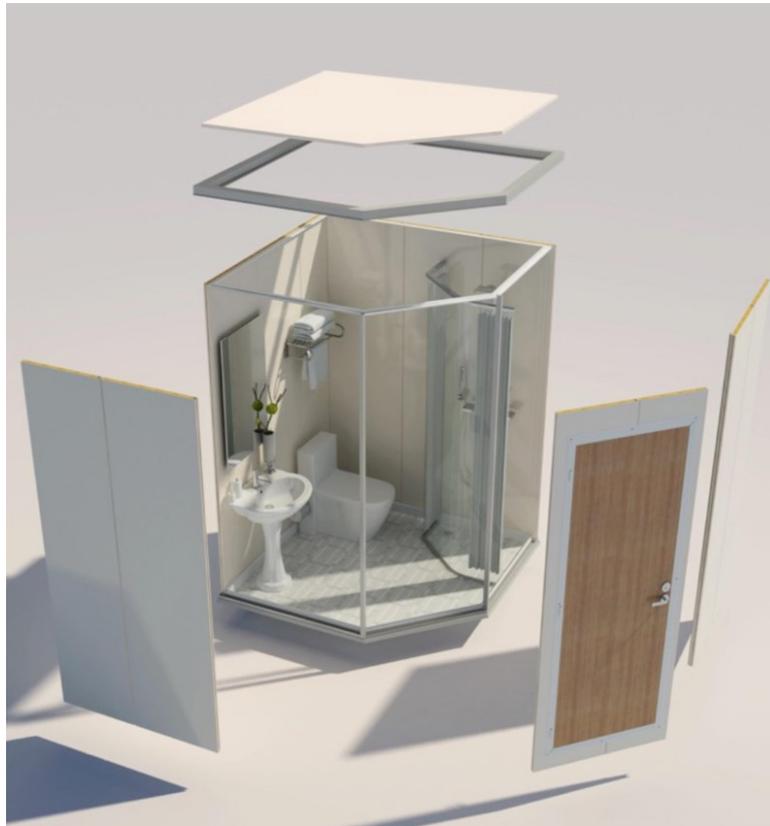


Prefabricated Wet Units are custom designed to suit individual requirements and are certified with a B15 fire rating. In general, there are three main categories of wet unit, namely Common Type, Lightweight Type and Floor Heater Type.

Each Wet Unit is manufactured with customer specified fixtures and are designed for simple on-site installation.




Standard Wet Unit Layouts

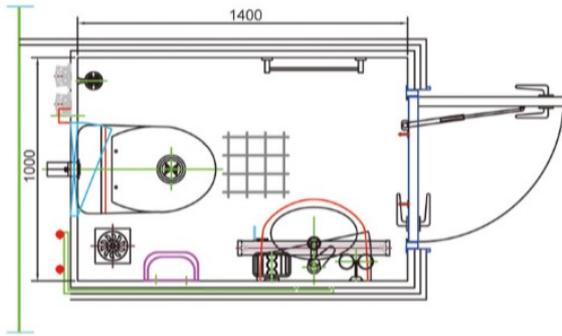Type A




Type B

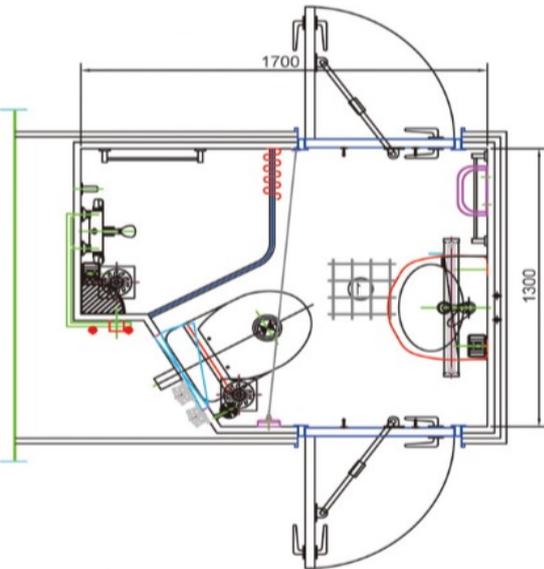


Standard Wet Unit Layouts (continued)

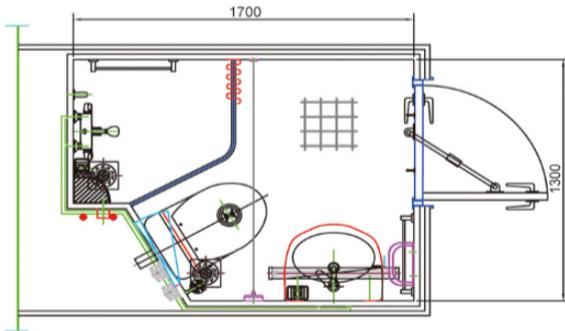Type C




Type D

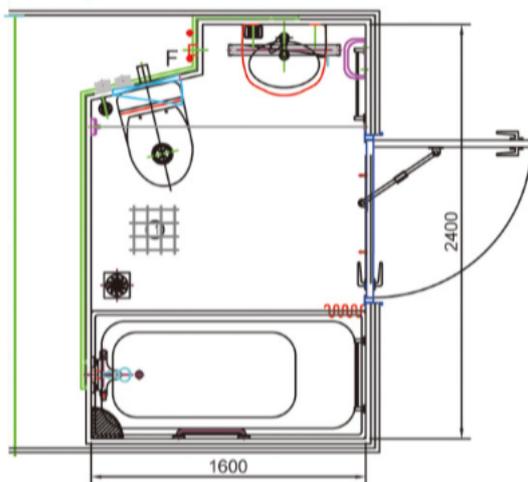


Standard Wet Unit Layouts (continued)

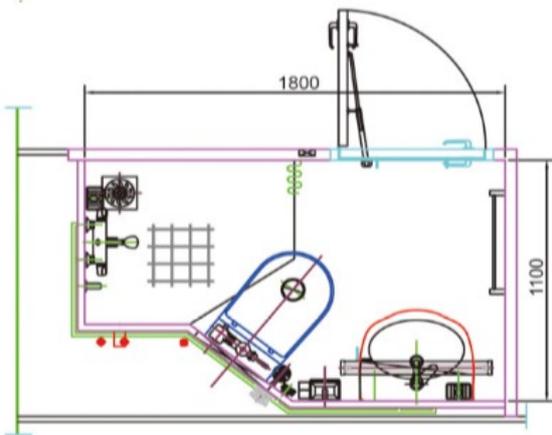Type E



Type F

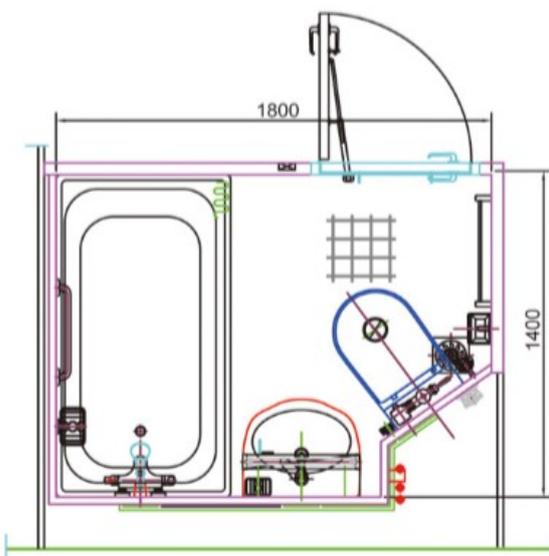



**Registered Office:**

4SEA Materials B.V.  
Patrijzenlaar 4,  
4854EC Bavel,  
Netherlands

Tel: +31 (0) 6 42458311

E-mail: [4SEABV@gmail.com](mailto:4SEABV@gmail.com)

Company Registration No. 73391360  
VAT No. NL859507130B01