




LITHIUM



DISTANCE:	44 FEET	VOLUME:	24.685 mL
RATIO:	9.15:1	FORWARD:	16.38 mL
DROP BRUSH:	36 FEET	REVERSE:	8.305 mL
TANKS:	TERRAIN & CURRENT	PUMP:	MULTI

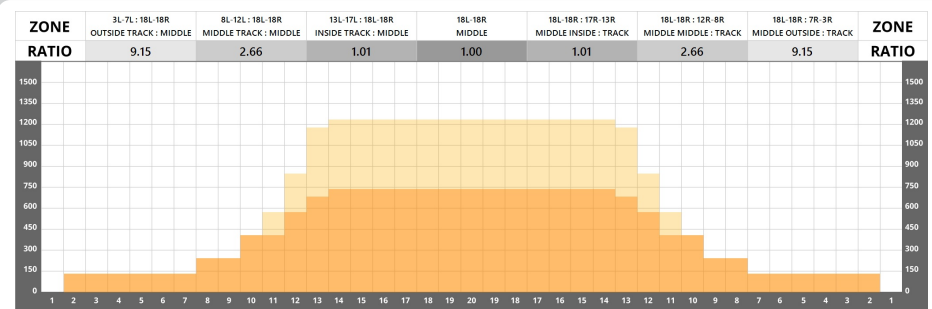

FORWARD LOADS DATA


#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	3	45	14	4	A - Terrain	0 → 4	4,995
2	8L	8R	2	55	18	4	A - Terrain	4 → 9	2,750
3	10L	10R	3	55	18	3	A - Terrain	9 → 17	3,465
4	12L	12R	3	55	18	3	A - Terrain	17 → 24	2,805
5	13L	13R	2	55	22	3	A - Terrain	24 → 30	1,650
6	14L	14R	1	55	22	3	A - Terrain	30 → 33	715
7	2L	2R	0	55	30	3	A - Terrain	33 → 44	0

REVERSE LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	0	55	26	3	B - Current	36 → 33	0
2	13L	13R	4	55	22	3	B - Current	33 → 21	3,300
3	12L	12R	2	55	18	3	B - Current	21 → 16	1,870
4	11L	11R	3	55	18	3	B - Current	16 → 8	3,135
5	2L	2R	0	55	14	4	B - Current	8 → 0	0

THIS PATTERN IS DESIGNED FOR:

VARIABLE BUFFER SPEEDS | VARIABLE MICROLITER STREAMS | DUAL CONDITIONING TANKS | REVERSE DROP BRUSH
 This pattern may require adjustments if using a lane machine that does not have these features

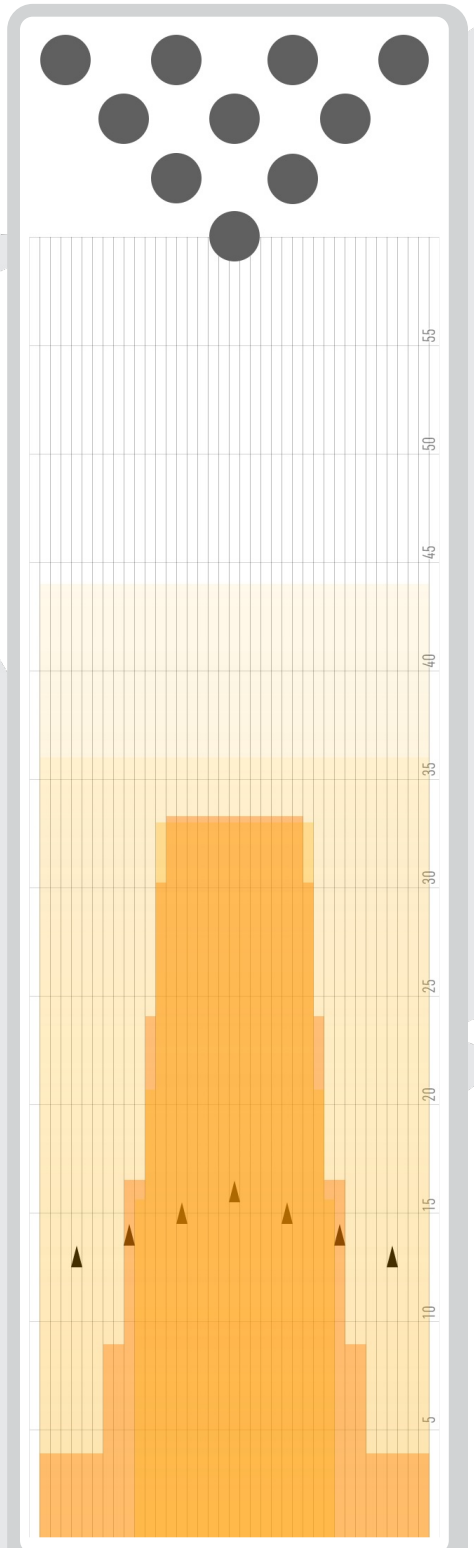

KEGEL PATTERN LIBRARY APP



[PATTERNLIBRARY.KEGEL.NET](https://patternlibrary.kegel.net)



SCAN QR CODE TO
 SHARE AND
 DOWNLOAD
 THIS PATTERN

