


Oil Pattern Distance	39	Reverse Brush Drop	35	Oil Per Board	50 ul
Forward Oil Total	14.4 mL	Reverse Oil Total	13.45 mL	Volume Oil Total	27.85 mL
Tank Configuration	A Only	Tank A Conditioner		Tank B Conditioner	

	START	STOP	LOADS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	3	18	3	A	111	0.0	5.1	5.1	5550
2	8L	8R	3	18	3	A	75	5.1	12.7	7.6	3750
3	12L	10R	3	18	3	A	57	12.7	20.3	7.6	2850
4	14L	12R	3	18	3	A	45	20.3	27.9	7.6	2250
5	2L	2R	0	18	3	A	0	27.9	33.0	5.1	0
6	2L	2R	0	22	3	A	0	33.0	39.0	6.0	0

	START	STOP	LOADS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	22	3	A	0	39.0	34.0	-5.0	0
2	13L	11R	1	22	3	A	17	34.0	30.9	-3.1	850
3	11L	10R	2	18	3	A	40	30.9	25.8	-5.1	2000
4	10L	9R	2	18	3	A	44	25.8	20.7	-5.1	2200
5	9L	9R	2	18	3	A	46	20.7	15.6	-5.1	2300
6	7L	7R	2	18	3	A	54	15.6	10.5	-5.1	2700
7	5L	5R	1	14	3	A	31	10.5	8.6	-1.9	1550
8	2L	2R	1	14	3	A	37	8.6	6.7	-1.9	1850
9	2L	2R	0	14	3	A	0	6.7	0.0	-6.7	0

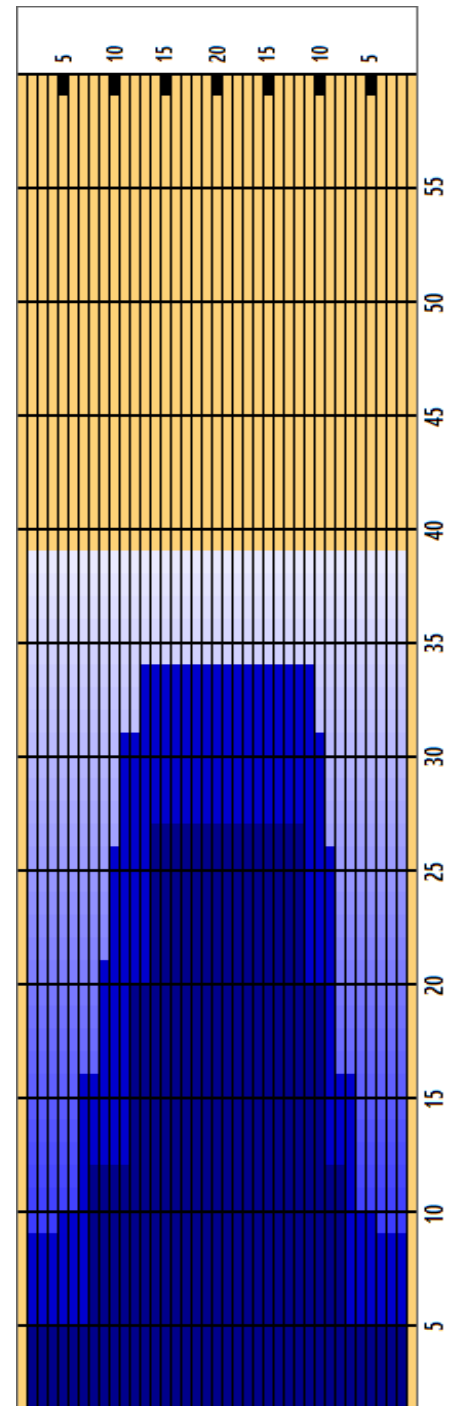

Cleaner Ratio Main Mix NA Forward
 Cleaner Ratio Back End Mix NA Reverse
 Cleaner Ratio Back End Distance NA Combined
 Buffer RPM: 4 = 700 | 3 = 500 | 2 = 200 | 1 = 100



--

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside:Middle	Middle:Middle	Inside:Middle	Middle: Inside	Middle:Middle	Middle:Outside
Track Zone Ratio	4.6	1.62	1.03	1	1.34	4.6

