


The Trusted Solution for a Beautiful Roof.


BEAUTY You Can See. **QUALITY** You Can Feel.

NOW THAT IT'S TIME TO REPLACE YOUR ROOF, WHY TAKE ANYTHING FOR GRANTED? We never do. Since 1951, IKO has been protecting American homes and families just like yours against the elements.

Whether it's elegant and sophisticated or laid-back and casual, or somewhere in-between, IKO Cambridge® Architectural shingles come in a wide range of stunning color blends to express your personality, reflect your taste and potentially boost your home's resale value too.

Their modern, laminated two-piece design provides the depth, dimension and texture of genuine wood shakes for an upscale appearance without the upscale price tag. Now unleash your exterior designer and dress up your home with an exciting new look, for less than you might expect.

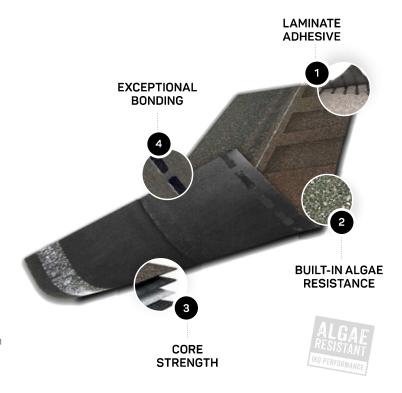

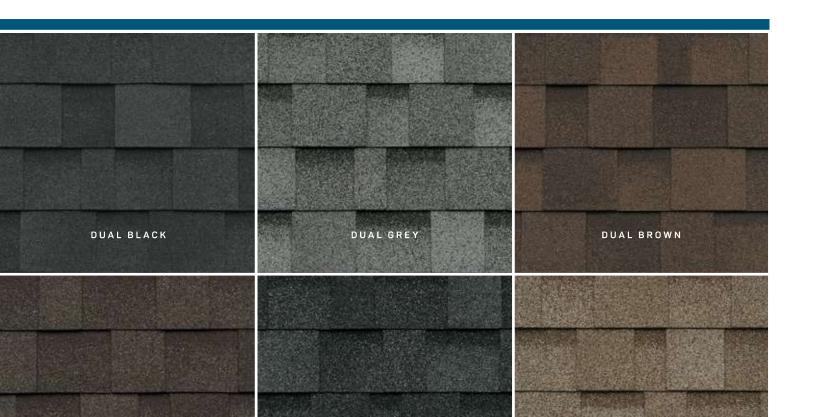

PERFORMANCE You Can Trust.

- **1 LAMINATE ADHESIVE.** Five strips of our tough, construction-grade adhesive are used to laminate the shim to the tooth.
- **BUILT-IN ALGAE RESISTANCE.** Special colorfast granules embedded in the shingles' surface help inhibit the growth of blue-green algae that can cause unattractive black stains, streaks and discoloration.
- 3 CORE STRENGTH. Our resilient fiberglass mat is coated top and bottom with weathering asphalt, then surfaced with colored granules. It's heavy-duty for exceptional durability and structural integrity.
- 4 **EXCEPTIONAL BONDING.** IKO's FastLock® sealant on the shingles' bottom edge gets extra-tacky when activated by the sun's heat. This creates a strong bond to help ensure maximum protection against wind uplift, blow-off and water penetration.

Limited Warranty¹	Limited Lifetime ³
Iron Clad Protection¹	10 Years (U.S. only)
Limited Wind Warranty¹	110 mph (177 km/h)
Limited High-Wind Warranty Upgrade ^{1,2}	130 mph (210 km/h)
PRODUCT SPECIFICATION	
PRODUCT SPECIFICATION	S ⁴
Length	S ⁴ 40 7/8 in (1038 mm)
PRODUCT SPECIFICATION	S ⁴
PRODUCT SPECIFICATION Length	S ⁴ 40 7/8 in (1038 mm)
PRODUCT SPECIFICATION Length Width	S ⁴ 40 7/8 in (1038 mm) 13 3/4 in (349 mm)
PRODUCT SPECIFICATION Length Width Exposure	\$4 40 7/8 in (1038 mm) 13 3/4 in (349 mm) 5 7/8 in (149 mm) 33 1/3 ft² (3.1 m²)





IMPORTANT! To ensure complete satisfaction, please view several full-size shingles and an actual roof installation prior to final color selection as the shingle swatches and photography shown online, in our brochures and in our **ROOFViewer®** tool may not accurately reflect shingle color and do not fully represent the entire color blend range, nor the impact of sunlight.

Note: Product and color availability may vary by region. Products with Miami Dade NOA, FBC product approval and Texas Department of Insurance listings are available. Please contact IKO for details. *See I imited Warrantu.



Shingles are your home's first line of defense, but they protect, perform and look their best installed with the **IKO Proformax Integrated Roofing Accessories** shown below.



DECK PROTECTION

SYNTHETIC UNDERLAYMENT

ROOF STARTERS

CAPPING SHINGLES

IKO GoldSeam™ Roof Sealing Tape

1a. Apply where the fascia and eaves meet.1b. Apply over seams when sealing the deck using

synthetic underlayment.

StormShield®

1c. Apply under shingled roofs to help prevent water infiltration due to ice dams and wind-driven rain.

2. Stormtite™

It's IKO's economical synthetic underlayment choice. Stronger than conventional felts, Stormtite installs easily, even in cool weather, due to its light weight. Stormtite is the perfect combination of strength and flexibility.

3. Leading Edge Plus™ or EdgeSeal™

Apply starter shingles with IKO's own highstrength thermally activated sealant or use the double-sided starter roll at eaves and rakes to help ensure wind resistance at that critical first course of shingles.

4. Hip & Ridge 12™

These capping shingles are available in colors that pair with every Cambridge color. Installation is easy, just separate the tapered pieces along the perforation, bend and nail in place. No waste.





