




Set-up Instructions

US patent no. 9,051,751,B2
Canadian patent no. 2,913,435
Additional patents pending


Step 1:
Fill weight bags
with sand or rocks




Step 2:
Set frame in upright position and undo Velcro strap

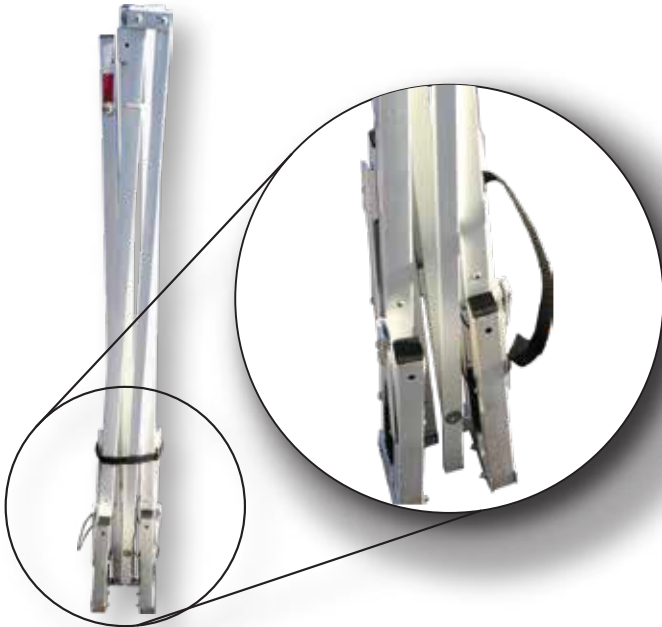


Step 4:
Pull sides to extend frame so that bottom horizontal bars are parallel to the ground and slide locking mechanism to lock bottom arms in position.

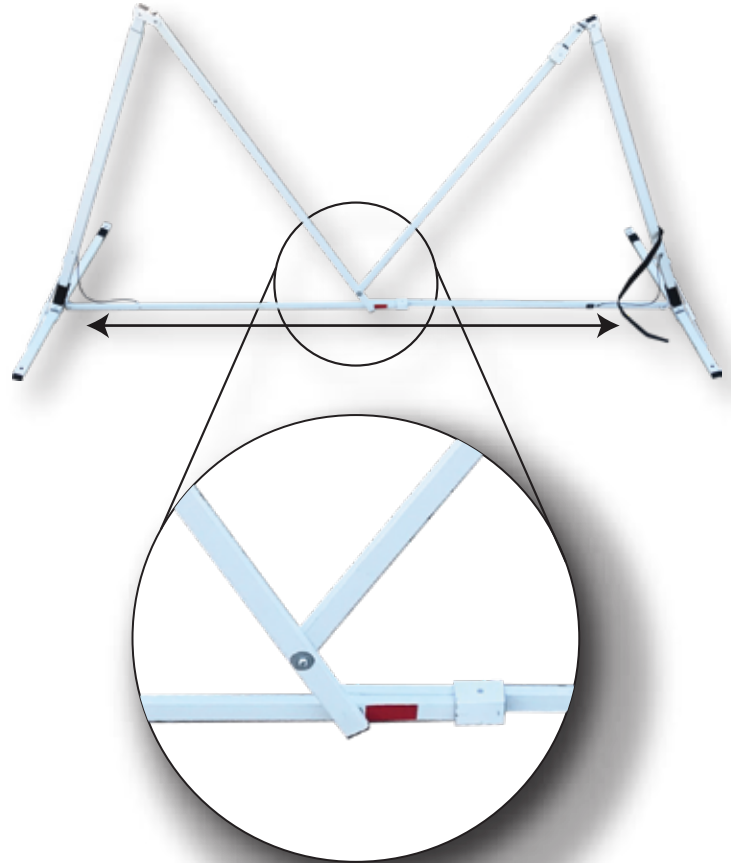

Step 3:
Fold all feet down (4) and lock in position

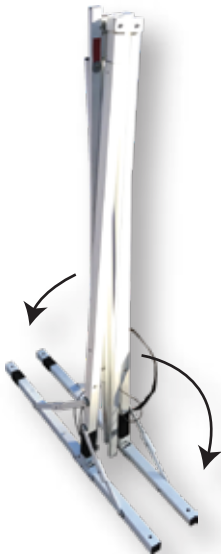

Step 5:
Pull top horizontal bars up so they are parallel to the ground and slide locking mechanism to lock top arms in position.

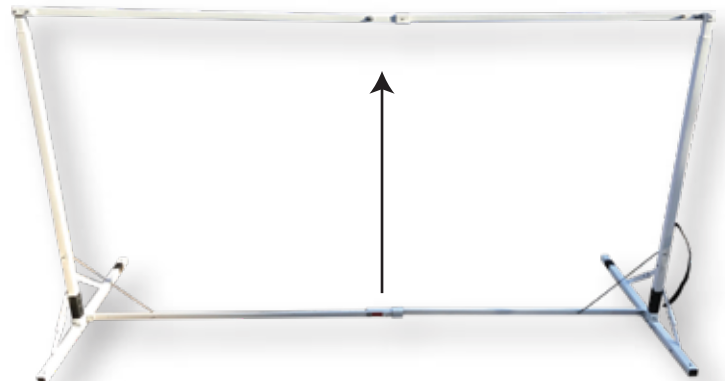

Step 6:


Move frame to desired location. Set weight bags on the long feet (Velcro to Velcro) and extend sides of frame up until pins lock in place

**Step 7:**

Next place screen on the short foot side of frame. Slide screen pockets over top corners of the frame (Image A) and attach the Velcro at bottom of screen to the Velcro at bottom of frame (Image B) and attach Velcro on side of screen to Velcro on side of frame (Image C).

**Image A****Image B****NOTE:**

Once assembled, height can be adjusted by pushing the locking pins in on the legs and lowering the top of frame down. To have the screen fold nicely in the middle , make sure that the Velcro strips at mid screen are attached to the Velcro pieces at mid frame (Image C).

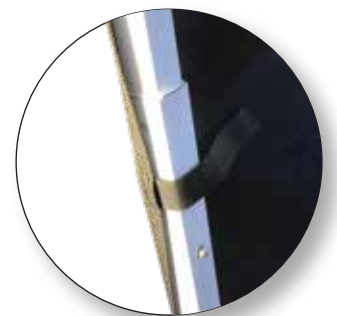**Image C****To fold away for storage**

Reverse the set up procedure

Note: frame must be in the lowered height position

Slide locking mechanism back on top and bottom arms and secure to attached magnet

Wrap Velcro back around the unit

Note: when folding the horizontal top and bottom arms for storage make sure the red markings on top and bottom arms are facing each other.

Place back in carrying bag

Please visit the website for warranty information. www.thebreezscreen.com