Product Introduction

» Case opener, case packer, case sealer, palletizer
Case Erector, Case Packer, Case Sealer and Palletizer

More efficient
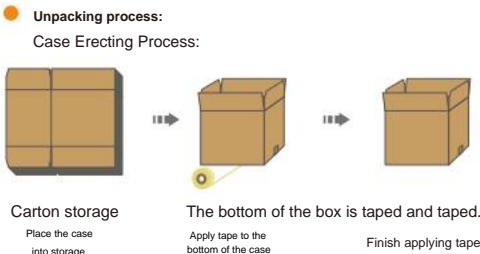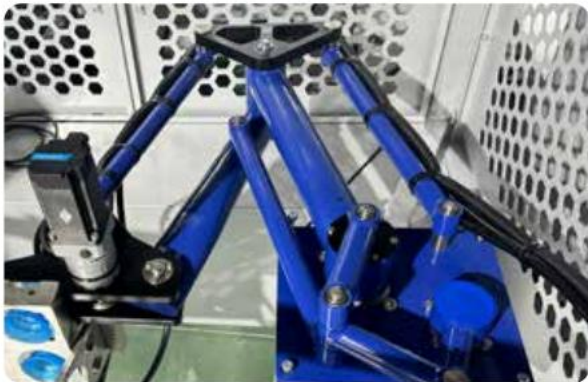
High Efficiency

More secure

Safer

Easy to operate

Easy to Operate

TKXS-400 Robotic Carton Opener

TKXS-400 Robotic Case Erector

NEW
PRODUCT

● **Unpacking process:**
Case Erecting Process:

Carton storage	The bottom of the box is taped and taped.	
Place the case into storage	Apply tape to the bottom of the case	Finish applying tape

Performance characteristics

Performance FeaturesThe machine

- has a simple structure, is easy to operate and maintain, and is widely used in various industries;
  Simple machine structure, easy to operate and maintain, widely used in various industries;

- The whole machine is unpacked with a robot, which has a high degree of automation and reduces labor costs;
  High automation with robotic case erector, reducing manual labor;

- Low noise, smooth use, no damage to cartons.
  Low noise, stable operation, does not damage cases.
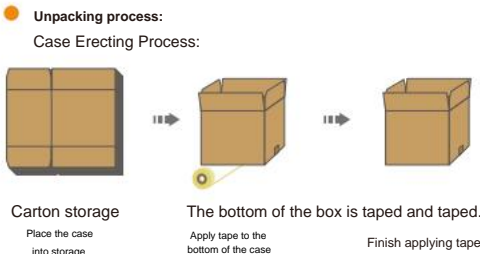
Performance Technical Parameters

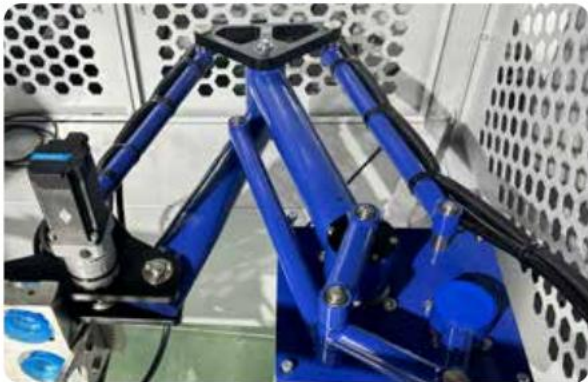|	
Carton size (length) / Case Dimensions (Length)	175-420mm
Carton size (width) / Case Dimensions (Width)	85-350mm
Carton size (height) / Case Dimensions (Height)	150-350mm
Total Power / Total Power	2.0kw
Sealing speed / Sealing Speed	5-25pcs/min
Air pressure supply / Air Pressure Supply	6kg/cỹ
Machine Net Weight / Net Weight	550kg
Machine size / Machine Dimensions	L2400 × W2000 × H1400mm
Power Type / Power Supply	220V 50Hz
TypeApplicable tape / Applicable Tape	W48; W50 (choose one)

TKXM-500 Robotic Carton Opener

TKXM-500 Robotic Case Erector

NEW
PRODUCT

● **Unpacking process:**
Case Erecting Process:

Carton storage	The bottom of the box is taped and taped.	
Place the case into storage	Apply tape to the bottom of the case	Finish applying tape

Performance characteristics

Performance Features

- The machine has a simple structure, is easy to operate and maintain, and is widely used in all walks of life;
  Simple machine structure, easy to operate and maintain, widely used in various industries;

- The whole machine is unpacked with a robot, which has a high degree of automation and reduces labor costs;
  High automation with robotic case erector, reducing manual labor;

- Low noise, smooth use, no damage to cartons.
  Low noise, stable operation, does not damage cases.

Performance Technical Parameters

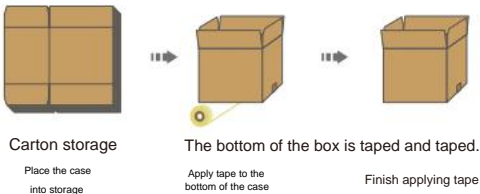|	
Carton size (length) / Case Dimensions (Length)	280-500mm
Carton size (width) / Case Dimensions (Width)	150-400mm
Carton size (height) / Carton Dimensions (Height)	150-400mm
Total Power / Total Power	2.0kw
Sealing speed / Sealing Speed	5-25pcs/min
Air pressure supply / Air Pressure Supply	6kg/cỹ
Machine Net Weight / Net Weight	620kg
Machine size / Machine Dimensions	L2600 × W2100 × H1400mm
Power Type / Power Supply	220V 50Hz
TypeApplicable tape / Applicable Tape	Width less than 60mm / Width 60mm or less

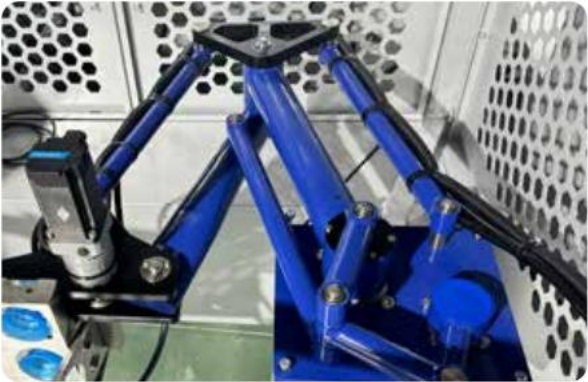# TKXL-650 Robotic Carton Opener

TKXL-650 Robotic Case Erector

NEW PRODUCT

● **Unpacking process:**
Case Erecting Process:

Carton storage

Place the case into storage

The bottom of the box is taped and taped.

Apply tape to the bottom of the case

Finish applying tape

Performance Technical Parameters

Carton size (length) Case Dimensions (Length)	280-650mm
Carton size (width) Case Dimensions (Width)	180-500mm
Carton size (height) Case Dimensions (Height)	150-500mm
Total Power Total Power	2.0kw
Sealing speed Sealing Speed	5-25pcs/min
Air pressure supply Air Pressure Supply	6kg/cÿ
Machine Net Weight Net Weight	750kg
Machine size Machine Dimensions	L2920 × W2100 × H1550mm
Power Type Power Supply	220V 50Hz
TypeApplicable tape Applicable Tape	Width less than 60mm Width 60mm or less

Performance characteristics
Performance Features

● The machine has a simple structure, is easy to operate and maintain, and is widely used

in all walks of life;
Simple machine structure, easy to operate and maintain, widely used in various industries;

● The whole machine is unpacked with a robot, which has a high degree of automation and reduces labor costs;
High automation with robot case opening, reducing manual labor;

● Low noise, smooth use, no damage to cartons.
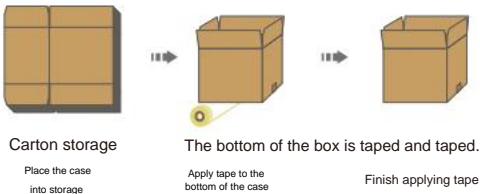Low noise, stable operation, does not damage cartons.

KXS-400 Robotic Carton Opener

KXS-400 Robotic Case Erector

● **Unpacking process:**
Case Erecting Process:

Carton storage

Place the case into storage

The bottom of the box is taped and taped.

Apply tape to the bottom of the case

Finish applying tape

Performance Technical Parameters

Carton size (length) Case Dimensions (Length)	175-420mm
Carton size (width) Case Dimensions (Width)	85-350mm
Carton size (height) Case Dimensions (Height)	150-350mm
Total Power Total Power	2.0kw
Sealing speed Sealing Speed	5-30pcs/min
Air pressure supply Air Pressure Supply	6kg/cÿ
Machine Net Weight Net Weight	450kg
Machine size Machine Dimensions	L2400 × W2000 × H1400mm
Power Type Power Supply	220V 50Hz
TypeApplicable tape Applicable Tape	W48mm

Performance characteristics
Performance FeaturesThe machine

● has a simple structure, is easy to operate and maintain, and is widely used in

various industries;
Simple machine structure, easy to operate and maintain, widely used in various industries;

● The whole machine is unpacked with a robot, which has a high degree of automation and reduces labor costs;
High automation with robot case opening, reducing manual labor;

● Low noise, smooth use, no damage to cartons.
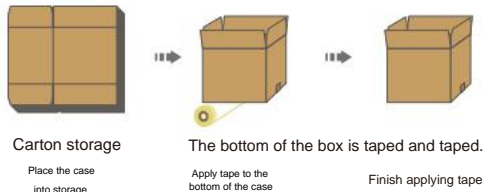Low noise, stable operation, does not damage cartons.

KXM-500 Robotic Carton Opener

KXM-500 Robotic Case Erector

Unpacking process:
Case Erecting Process:

Carton storage	The bottom of the box is taped and taped.	
Place the case into storage	Apply tape to the bottom of the case	Finish applying tape

Performance characteristics
Performance FeaturesThe machine

● has a simple structure, is easy to operate and maintain, and is widely used in
various industries;
Simple machine structure, easy to operate and maintain, widely used in various industries;

● The whole machine is unpacked with a robot, which has a high degree of automation and reduces labor costs;
High automation with robot case opening, reducing manual labor;

● Low noise, smooth use, no damage to cartons.
Low noise, stable operation, does not damage cartons.
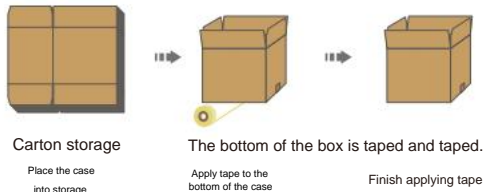

Performance Technical Parameters

Carton size (length) / Case Dimensions (Length)	280-500mm
Carton size (width) / Case Dimensions (Width)	150-400mm
Carton size (height) / Case Dimensions (Height)	150-400mm
Total Power / Total Power	2.0kw
Sealing speed / Sealing Speed	5-30pcs/min
Air pressure supply / Air Pressure Supply	6kg/cÿ
Machine Net Weight / Net Weight	620kg
Machine size / Machine Dimensions	L2600 × W2000 × H1400mm
Power Type / Power Supply	220V 50Hz
TypeApplicable tape / Applicable Tape	Width less than 60mm / Width 60mm or less

---

KXL-650 Robotic Carton Opener

KXL-650 Robotic Case Erector

Unpacking process:
Case Erecting Process:

Carton storage	The bottom of the box is taped and taped.	
Place the case into storage	Apply tape to the bottom of the case	Finish applying tape

Performance characteristics
Performance Features

● The machine has a simple structure, is easy to operate and maintain, and is widely used
in all walks of life;
Simple machine structure, easy to operate and maintain, widely used in various industries;

● The whole machine is unpacked with a robot, which has a high degree of automation and reduces labor costs;
High automation with robot case opening, reducing manual labor;

● Low noise, smooth use, no damage to cartons.
Low noise, stable operation, does not damage cartons.
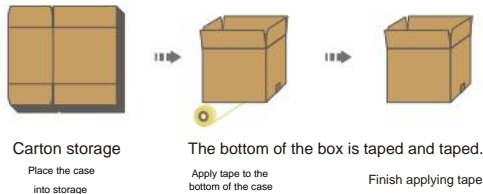

Performance Technical Parameters

Carton size (length) / Case Dimensions (Length)	280-650mm
Carton size (width) / Case Dimensions (Width)	180-500mm
Carton size (height) / Case Dimensions (Height)	150-500mm
Total Power / Total Power	2.0kw
Sealing speed / Sealing Speed	5-25pcs/min
Air pressure supply / Air Pressure Supply	6kg/cÿ
Machine Net Weight / Net Weight	750kg
Machine size / Machine Dimensions	L2920 × W2100 × H1550mm
Power Type / Power Supply	220V 50Hz
TypeApplicable tape / Applicable Tape	Width less than 60mm / Width 60mm or less

DKXM-500 Dual Servo Carton Opener

DKXM-500 Dual Servo Case Erector

Unpacking process:
Case Erecting Process:

| Carton storage | The bottom of the box is taped and taped. | |
| Place the case into storage | Apply tape to the bottom of the case | Finish applying tape |

Performance Technical Parameters

Carton size (length) / Case Dimensions (Length)	280-500mm
Carton size (width) / Case Dimensions (Width)	150-400mm
Carton size (height) / Case Dimensions (Height)	150-400mm
Total Power / Total Power	0.8kw
Sealing speed / Sealing Speed	5-15pcs/min
Air pressure supply / Air Pressure Supply	6kg/cǚ
Machine Net Weight / Net Weight	320kg
Machine size / Machine Dimensions	L2007 × W1895 × H1400mm
Power Type / Power Supply	220V 50Hz
TypeApplicable tape / Applicable Tape	Width less than 60mm / Width 60mm or less

Performance characteristics
Performance FeaturesThe machine

- has a simple structure, is easy to operate and maintain, and is widely used in various industries;
  Simple machine structure, easy to operate and maintain, widely used in various industries;

- The whole machine is unpacked with two servo motors, which has a high degree of automation and reduces labor;
  High automation with dual servo, reducing manual labor;

- Low noise, smooth use, no damage to cartons.
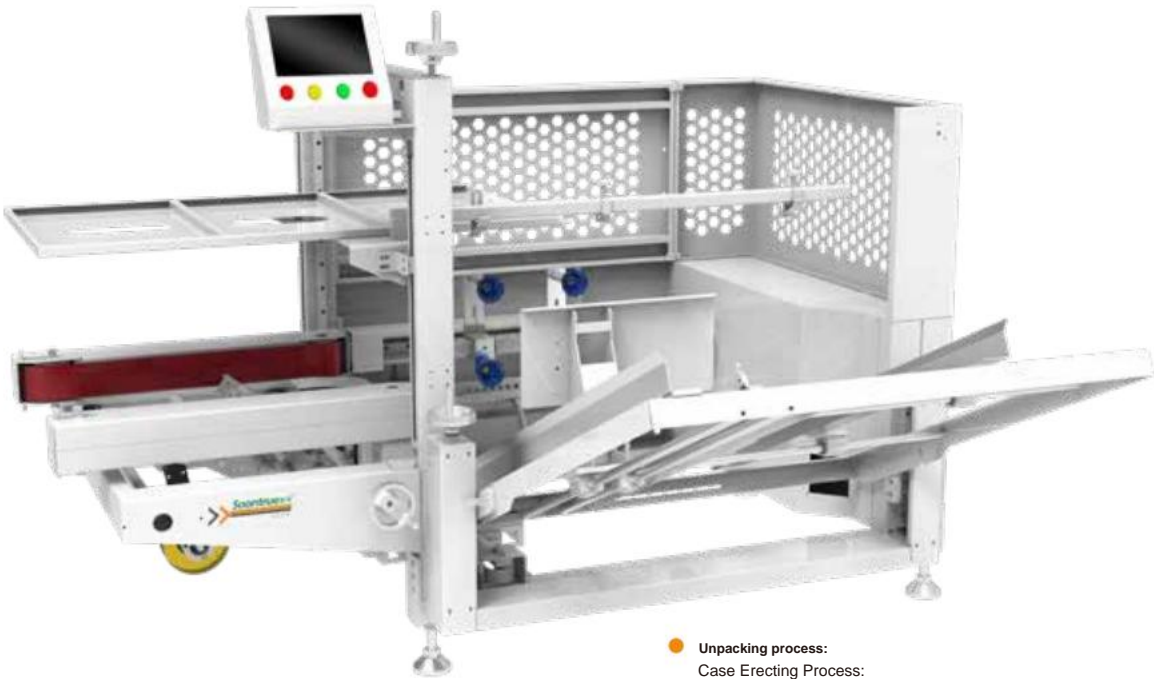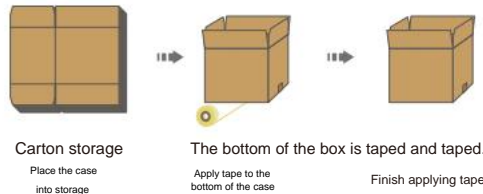 Low noise, stable operation, does not damage cartons.

DKXL-650 Dual Servo Carton Opener

DKXL-650 Dual Servo Case Erector

Unpacking process:
Case Erecting Process:

| Carton storage | The bottom of the box is taped and taped. | |
| Place the case into storage | Apply tape to the bottom of the case | Finish applying tape |

Performance Technical Parameters

Carton size (length) / Case Dimensions (Length)	280-660mm
Carton size (width) / Case Dimensions (Width)	180-500mm
Carton size (height) / Case Dimensions (Height)	150-500mm
Total Power / Total Power	0.8kw
Sealing speed / Sealing Speed	5-15pcs/min
Air pressure supply / Air Pressure Supply	6kg/cǚ
Machine Net Weight / Net Weight	450kg
Machine size / Machine Dimensions	L2390 × W2000 × H1340mm
Power Type / Power Supply	220V 50Hz
TypeApplicable tape / Applicable Tape	Width less than 60mm / Width 60mm or less

Performance characteristics
Performance Features

- The machine has a simple structure, is easy to operate and maintain, and is widely used in all walks of life;
  Simple machine structure, easy to operate and maintain, widely used in various industries;

- The whole machine is unpacked with two servo motors, which has a high degree of automation and reduces labor;
  High automation with dual servo, reducing manual labor;

- Low noise, smooth use, no damage to cartons.
  Low noise, stable operation, does not damage cartons.

Optional Case Storage for Case Erector

Performance characteristics:

Performance Features

- The structure is simple and light, easy to maintain, and no need to stop the machine when changing the box;
  Simple machine structure, easy to operate and maintain, widely used in various industries; Used with
- the carton opener, effectively increase the number of carton inventory
  High automation with robotic case erector, reducing manual labor;
- Low noise, smooth use, no damage to cartons.
  Low noise, stable operation, does not damage cases.

Performance Technical Parameters

Storage box quantity Case Storage Quantity	About 100-150
	1500mm (customizable)
Case Storage Length	
Net weight of container Case Storage Net Weight	160kg
Power Type	pneumatic
Power Type	
Storage size	L1800 × W1220 × H740mm
Case Storage Dimensions	

Conventional pneumatic horizontal storage

Conventional Pneumatic Horizontal
Case Storage

Chain plate powered horizontal storage

Chain Plate Driven Horizontal
Case Storage

Performance characteristics:

Performance Features

- The structure is simple and light, easy to maintain, and no need to stop the machine when changing the box;
  Simple machine structure, easy to operate and maintain, widely used in various industries;
- Used with case erector, effectively increase the number of cases in the case inventory. High automation with robotic case erector, reducing manual labor; low noise, smooth use process, no damage to the carton.
- Low noise, stable operation, does not damage cases.

Performance Technical Parameters

Storage box quantity Case Storage Quantity	180-250
Length of container Case Storage Length	1800mm (1500/1800/2300mm can be customized)
Net Weight Case Storage Net Weight	230-350kg
Power Type Power Type	Motor drive
Case Size Case Storage Dimensions	L2300 × W1300 × H1200mm

SCFX-500 Automatic Case Folder and Case Sealer

● **Sealing process:**

Sealing Process
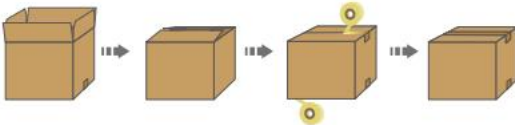
Push the carton in and fold the lid automatically. Taping is completed.

| Case Pushed In | Automatic Folding | Upper and Lower
Tape Application | Tape Application
Completed |

Performance Technical Parameters

Carton size (length) Case Dimensions (Length)	250-600mm
Carton size (width) Case Dimensions (Width)	150-500mm
Carton size (height) Case Dimensions (Height)	150-500mm
Total Power Total Power	0.6kw
Sealing speed Sealing Speed	5-30pcs/min
Air pressure supply Pressure Supply	6kg/cÿ
Machine Net Weight Net Weight	250kg
Machine size Machine Dimensions	L2000 × W840 × H1650 mm
Power Type Power Supply	220V 50Hz
TypeApplicable tape Applicable Tape	W48; W65; W75 (choose one)

Performance characteristics:

Performance FeaturesThe machine

- has a simple structure, is easy to operate and maintain, and is widely used in various industries;
  Simple machine structure, easy to operate and maintain, widely used in various industries;
- Adopt automatic folding and sealing to reduce labor;
  Using automated folding and sealing of the lid driven by the motor to reduce manual work;
- Low noise, smooth use, no damage to cartons.
  Low noise, stable operation, does not damage cases.