# **MCU312**





#### **Proteus Control Unit**

- 12" Sunlight Viewable Touchscreen Display
- New and Improved User Interface
- Conforms to IP65
- 8 Dedicated Hot-Keys
- Dedicated Crawler and Camera Control Pods
- Ergonomic, Soft-Touch, Waterproof, Anti-Microbial Keyboard
- Embedded Reporting Software with all major reporting standards
- Weatherproof, Industrial Case

With our new and improved Control Unit, you can view, record, and annotate inspection footage with ease! Designed with the user in mind the ergonomic unit and control panels aid you in the field. This new system is more powerful and simpler to use than ever.

## **Compatibility**






#### **Technical Data**

Controls	Dedicated camera and dedicated crawler control pods
Battery	Lithium Ion + up to 7.5 hours on screen time
Charging	Powered from Proteus interface or USB-C (20 VDC) adaptor
Screen	12" sunlight viewable touchscreen (1000 nits)
Keyboard	Full size QWERTY IP68 backlit silicone keyboard
Video Recording	MPEG4 (WinCan compatiable)
Image Capture	JPEG (Live or from recorded video)
Internal Storage	256GB (Expandable to 2TB+)
External Media	Supports external storage via USB
Language Support	Multi language support
Connections	Control interface, power and USB
Environmental Rating	IP65
Weight	7 kg / 15.5 lbs
Dimensions	501 x 173 x 395 mm / 19.5 x 7 x 15.5 inch
Processor	INTEL® Quad Core 1.5 GHz Processor
RAM	4 GB
Reporting Software	Embedded Minicam Reporting Software powered by WinCan ProTouch
Video Output	HDMI via USB-C







### **Proteus Control Unit**

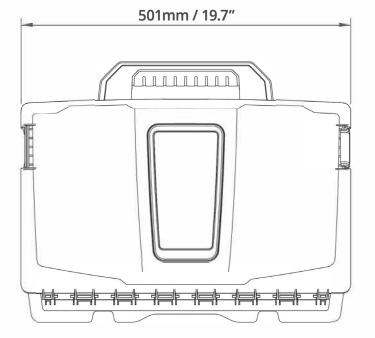



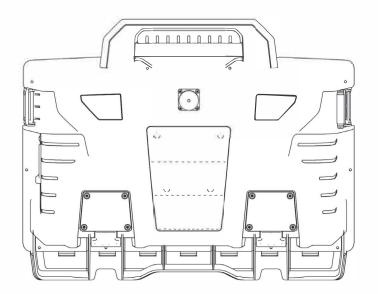





DYNACAM LTD

