


## Specifications

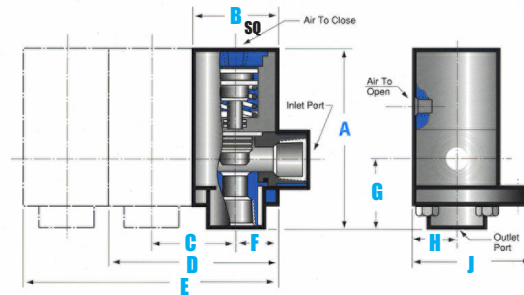


VALVE	A	B	C	D	E	F	G	H	J
1/2" ACR	3.62	1.75	3.75	3.50	5.25	.88	1.38	.88	2.44
1" ACR	5.75	2.75	2.75	5.50	8.25	1.38	2.25	1.38	3.50

dimensions for 1" are same in 3/4" version

## How to Order

### ACR XWXX-OCC

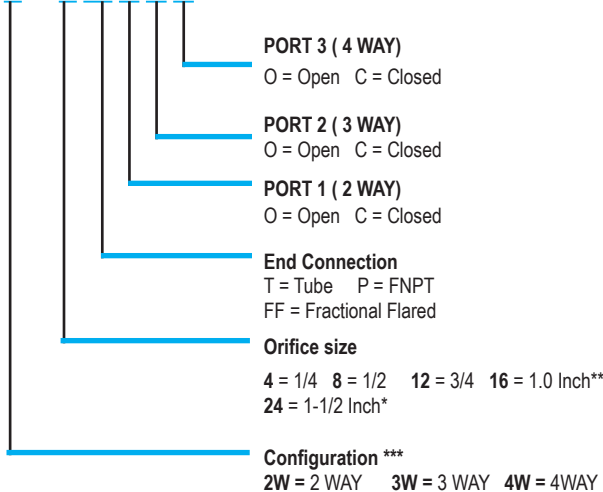

**Note 1 \*** ACR Valves with 1-1/2" dia orifice are only available with FNPT port connection. 1-12" dia valves are only available in 2way open, 2way closed and 3way configurations. This model is not available in configurations of 4 way & up.

**Note 2 \*\*** ACR Valves with 1/4" & 1/2" dia orifices can be ordered in configurations ranging from 2 way to 15 way ACR Valves with 3/4" & 1.0 dia orifices are available up to 8 way configuration ( see example on how to order )

**Note 3 \*\*\*** When valves are being ordered in configurations of 5 way and up the port designation changes from the typical designation ( see 4 way designator style ) to a revised designation. Example 4 way ACR-4W8P-CXC 5 way ACR-5W8P-CX4 6 way ACR-6W8P-CX5

**Note :** All pneumatic portions of valve are PVC unless specified. For Polypropylene or PVDF add as follows ( see below )

**Example :** ACR 2W8P-C-PP indicates Polypropylene pneumatic portion, ACR 2W8P-C-PVDF indicates PVDF pneumatic portion



**NACOM FLOW CONTROLS INCORPORATED** 1702 Newport circle Unit D Santa ana Calif 92705  
Tel: 714 957-5780 Fax: 714 957-5876