


# DILUTION DRAIN VALVE

## D.D.V SERIES Specifications

### Water pressure requirements

Requires 30 psi minimum up to 80 psi maximum

When water pressure is activated, a unique spool valve design moves forward and aspirates with the tank dry  
When water pressure is deactivated a teflon coated isolated return spring automatically.

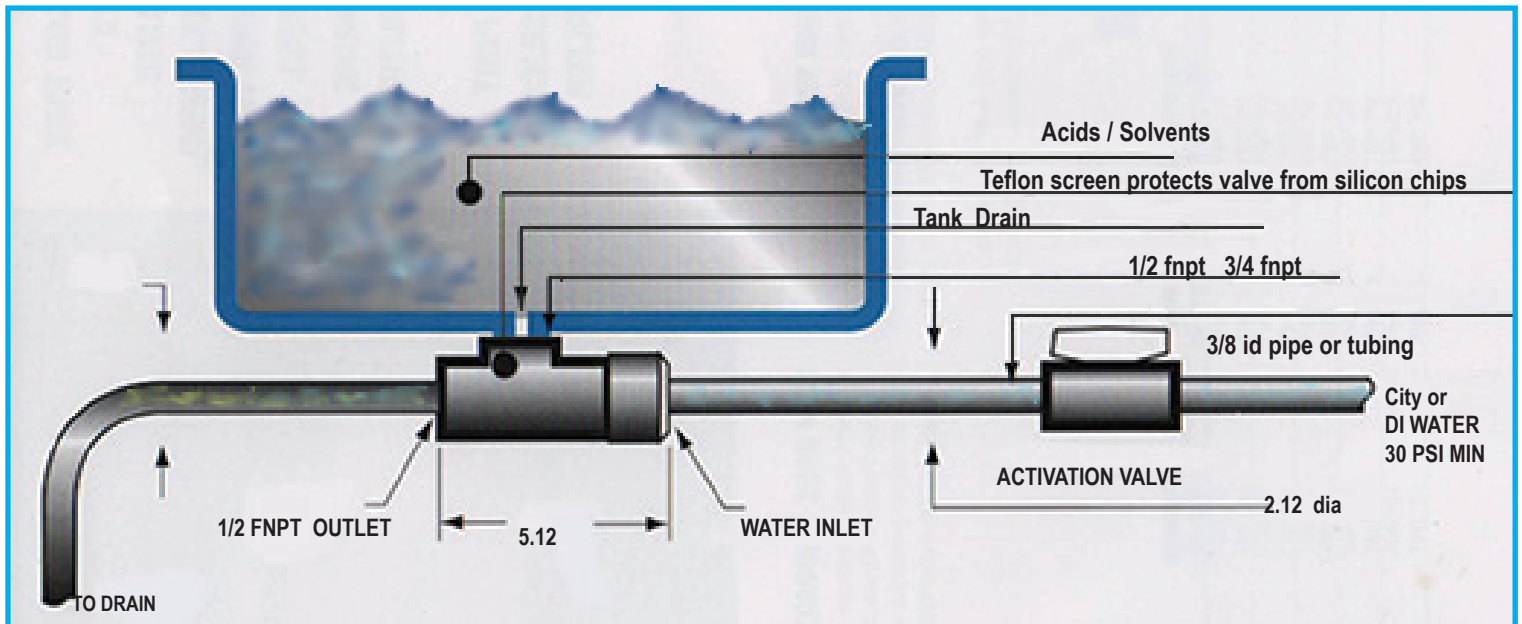

Nacom's PTFE Dilution Drain Valve

Warning : Although we offer Dilution Drain Valves in 2:1 , 6:1 and 10:1 ratios we recommend 10:1 ratio dilution rates . Depending on the solution being diluted it is possible that when diluting at 2:1 & 6:1 ratios exothermic reaction can occur. NACOM assumes no liability anyway when diluting at unsafe ratios. 10:1 ratio is recommended . 10:1 ratio definition is 10 cups of water to 1 cup of acids or chemical being diluted.