


SIV SERIES

Small Changes, Big Accomplishments





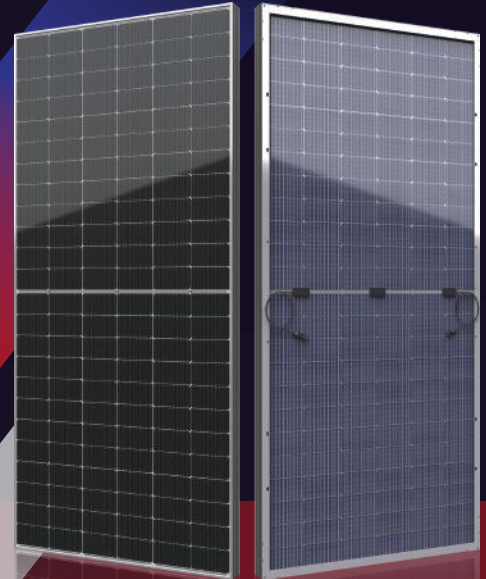

525-540W



● SIV SERIES

Seraphim redefined the high-efficiency module series by integrating 182mm silicon wafers with multi-busbar and half-cut cell technologies. Seraphim panel combined creative technology effectively and extremely improved the module efficiency and power output.

● KEY FEATURES

-  Less mismatch to get more power
-  Less power loss by minimizing the shading impact
-  Competitive low light performance
-  3 times EL test to ensure best quality
-  Ideal choice for utility and commercial scale projects by reduced BoS and improved ROI
-  Outstanding reliability proven by PVEL for stringent environment condition:
 - Sand, acid, salt and hail stones
 - 2400 Pa wind load and 5400 Pa snow load
 - Anti-PID

● QUALITY SYSTEM

ISO9001 / ISO14001 / ISO45001



● PRODUCT CERTIFICATION



● INSURANCE



● WARRANTY

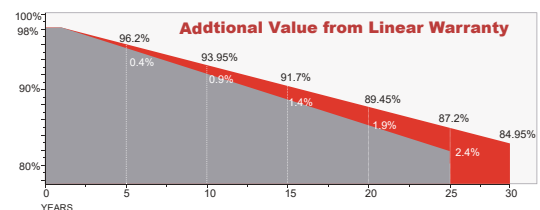


Mechanical Specifications

External Dimension	2285 x 1134 x 30 mm
Weight	32.5 kg
Solar Cells	PERC Mono crystalline(144pcs)
Front / Back Glass	2.0mm AR coating semi-tempered glass, low iron
Frame	Anodized aluminium alloy
Junction Box	IP68, 3 diodes
Output Cables	4.0mm ² , 250mm(+)/350mm(-) or Customized Length

Packing Configuration

Container	20'GP	40'HQ
Pieces per Pallet	32	32
Pallets per Container	4	20
Pieces per Container	128	640

Technical drawing

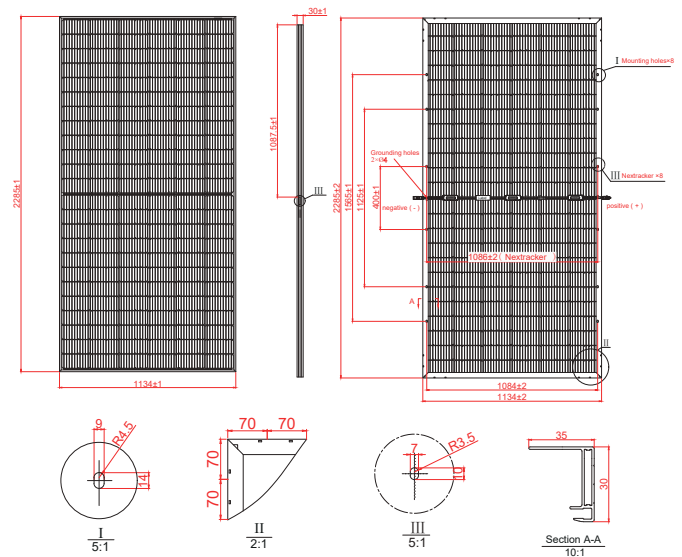

Electrical Characteristics



Module Type	SRP-525-BMA-BG			SRP-530-BMA-BG			SRP-535-BMA-BG			SRP-540-BMA-BG		
	Front STC	Front NOCT	Back STC	Front STC	Front NOCT	Back STC	Front STC	Front NOCT	Back STC	Front STC	Front NOCT	Back STC
Maximum Power -P _{mp} (W)	525	395	368	530	399	371	535	402	375	540	406	378
Open Circuit Voltage -V _{oc} (V)	49.20	45.90	49.18	49.33	46.03	49.28	49.40	46.09	49.38	49.50	46.18	49.48
Short Circuit Current -I _{sc} (A)	13.50	10.91	9.52	13.60	10.99	9.59	13.70	11.08	9.66	13.81	11.16	9.74
Maximum Power Voltage -V _{mp} (V)	40.78	38.22	40.89	41.03	38.27	41.10	41.29	38.33	41.35	41.55	38.39	41.61
Maximum Power Current -I _{mp} (A)	12.88	10.35	9.00	12.92	10.42	9.03	12.96	10.50	9.07	13.00	10.59	9.09
Module Efficiency STC-η _m (%)	20.26			20.45			20.65			20.84		
Power Tolerance (W)	(0, +3%)											
Pmax Temperature Coefficient	-0.35 %/°C											
Voc Temperature Coefficient	-0.27 %/°C											
Isc Temperature Coefficient	+0.05 %/°C											

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5
Power measurement tolerance: +/-3%

Rear Side Power Gain(SRP-530-BMA-BG)

Power Gain	10%	15%	20%	25%	30%
Maximum Power -P _{mp} (W)	583	610	636	663	689
Open Circuit Voltage -V _{oc} (V)	49.33	49.33	49.33	49.33	49.33
Short Circuit Current -I _{sc} (A)	14.96	15.64	16.32	17.00	17.68
Maximum Power Voltage -V _{mp} (V)	41.03	41.03	41.03	41.03	41.03
Maximum Power Current -I _{mp} (A)	14.21	14.86	15.50	16.15	16.80

I-V Curve

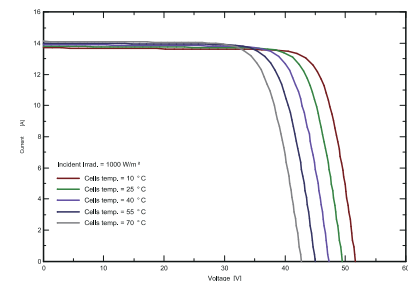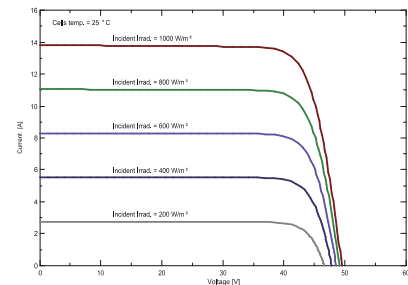

Application Conditions

Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	25 A
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature	45±2 °C
Bifaciality	70%±10%
Mechanical Load	Front side 5400 Pa / Back side 2400 Pa

Specifications are subject to change without further notification SRP-DS-EN-2021V2.0 © Copyright 2021 Seraphim



JIANGSU SERAPHIM SOLAR SYSTEM CO., LTD

Add: No.10, TongshunRd, HenglinTown, Wujin District, 213000, Changzhou, China
Tel: +86-519-68788166 Email: info@seraphim-energy.com