




776 Jernee Mill Road Suite 128, Sayreville, NJ 08872
1-888-308-3879

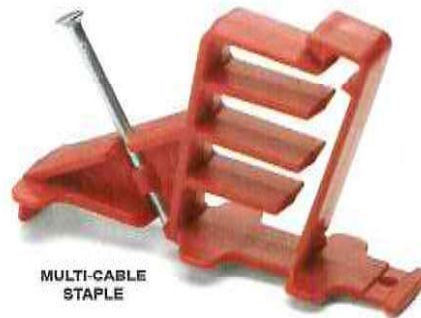

Special cable staples

Staples (and drilled holes) need to be at least 1-1/4 in. away from the edge of a framing member. In some cases, that means stacking wires on top of one another and using one staple to secure them. Most standard staples can handle two wires. Never install staples over multiple wires unless the staple is approved for it. The staple package should list how many wires it's rated for. The staple shown here is good for up to four wires.