

EVERBLUE™

PAVERS




EVERBLUE™

INTERIOR AND EXTERIOR PAVERS


**LOW MAINTENANCE.
NO FADING. NO SHALING. NO WORRIES.**

LOW MAINTENANCE

PROFESSIONALS EXPERIENCE NO MORE CALL BACKS. HOMEOWNERS
HAVE A PRODUCT WITH THE LOWEST MAINTENANCE IN THE
INDUSTRY.



PATIOS



POOL DECKS



STAIRS & STEPS



WALKWAYS

NO SHALING. NO WORRIES.

BLUESTONE IS POPULAR BUT INSTALLATIONS CAN BE PRONE TO SHALING
AND FADING. NOT ANY MORE.



Thermal Blue

24"x 24" - 60cm x 60cm
(23½" x 23½")

12"x 24" - 30cm x 60cm
(11¾" x 23½")

12"x 12" - 30cm x 30cm
(11¾" x 11¾")



Thermal Blue

24"x 24" - 60cm x 60cm
(23½" x 23½")

12"x 24" - 30cm x 60cm
(11¾" x 23½")

12"x 12" - 30cm x 30cm
(11¾" x 11¾")

Available Sizes

EVERBLUE Pavers



12" x 12" (11¾" x 11¾")

30cm x 30cm



12" x 24" (11¾" x 23¾")

30cm x 60cm



24" x 24" (23¾" x 23¾")

60cm x 60cm



12" x 48" (11¾" x 47¾")

30cm x 120cm



24" x 48" (23¾" x 47¾")

60cm x 120cm

Full Color Variegated



Thermal Blue




Available Sizes



12" x 12" (11¾" x 11¾")
30cm x 30cm




12" x 24" (11¾" x 23¾")
30cm x 60cm



24" x 24" (23¾" x 23¾")
60cm x 60cm

Sand



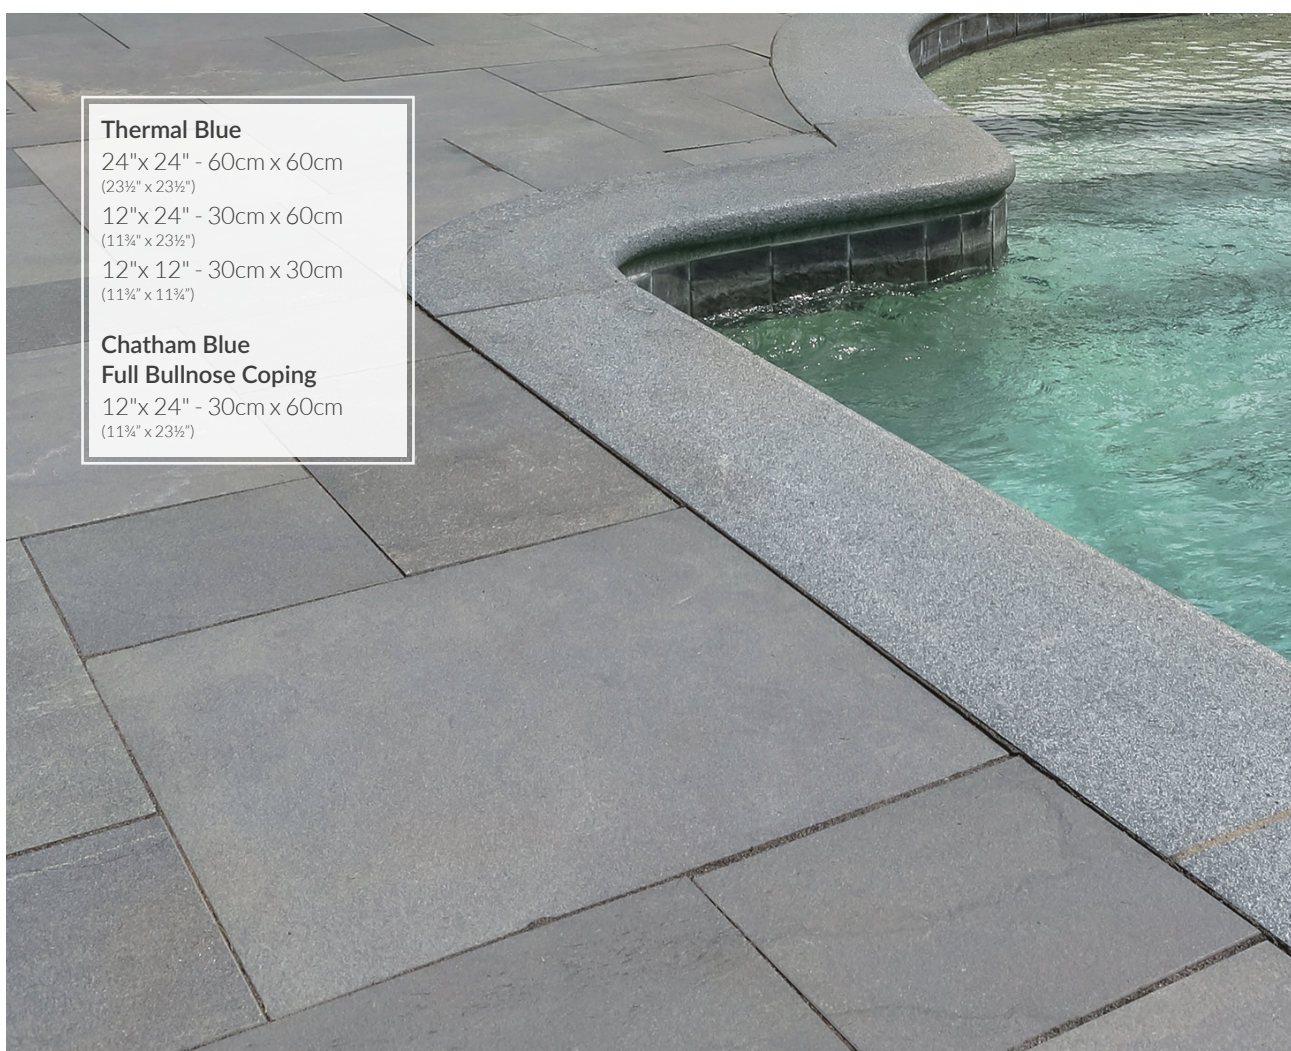



Full Color Variegated

24"x 48" - 60cm x 120cm
(23½" x 47½")

24"x 24" - 60cm x 60cm
(23½" x 23½")

12"x 24" - 30cm x 60cm
(11¾" x 23½")

12"x 12" - 30cm x 30cm
(11¾" x 11¾")



Sand

24"x 24" - 60cm x 60cm
(23½" x 23½")



12"x 24" - 30cm x 60cm
(11¾" x 23½")

Special Pieces

DOUBLE BEVEL COPING

30cm X 60cm - 12" X 24" (11 $\frac{3}{4}$ " x 23 $\frac{1}{2}$ ")

Available in Thermal Blue and Full Color

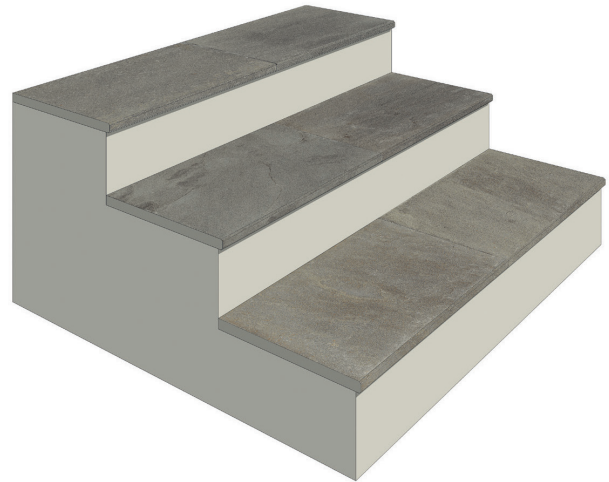
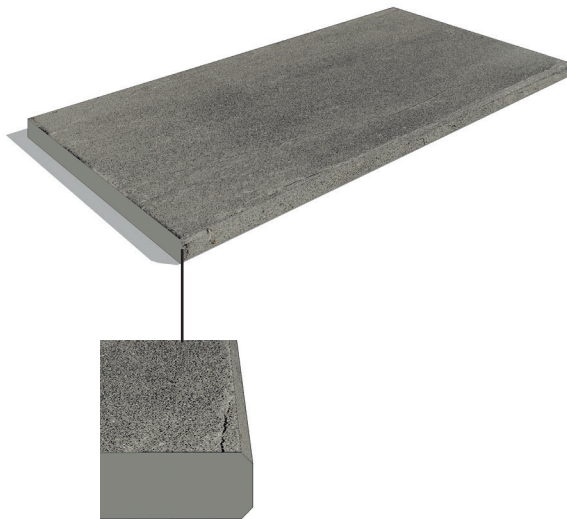


BULLNOSE COPING

A rounded edge design great for pools.

Available in all colors.

11 $\frac{3}{4}$ " x 23 $\frac{1}{3}$ "

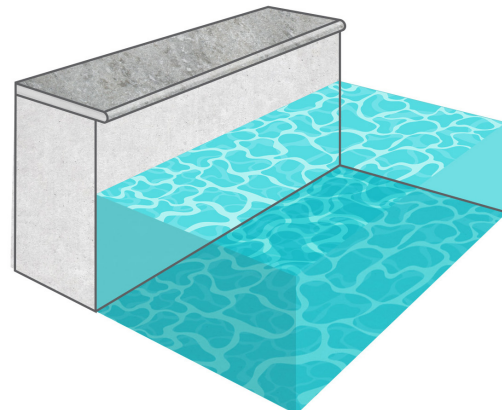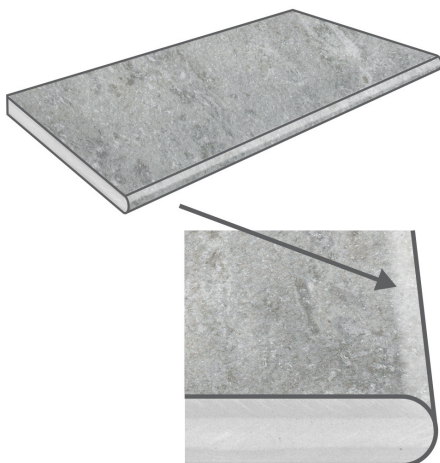

Advantages



LIGHTER AND EASIER
TO HANDLE THAN
CONCRETE PAVERS



SUPERIOR IN FIRE
RESISTANCE AND
DURABILITY TO
WOOD TILES



SUPERIOR IN STRENGTH
AND IMPACT RESISTANCE
TO CERAMIC TILES
SUPPORTS OVER 2000LB



RESISTANT TO
DAMAGE BY FROST,
SNOW, ICE AND HEAT
(-40°F - 210°F)



REMOVABLE AND
REUSABLE



EASY TO CLEAN
STAIN, CHEMICAL
AND SALT RESISTANT



EASY TO INSTALL



SLIP RESISTANT AND
QUICK DRAINING



THERMAL INSULATION
(HOT/COLD)

Installation

FLOATING INSTALLATION
ON SPACER FEET



RAISED INSTALLATION
ON FLAT SURFACES




INSTALLATION
ON CEMENT




INSTALLATION
ON SAND




Patterns

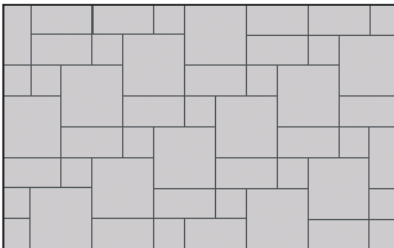


PATTERN A - most popular




No. 1 pcs	24"x24" - 60x60 cm	57.2%
No. 1 pcs	12"x24" - 30x60 cm	28.5%
No. 1 pcs	12"x12" - 30x30 cm	14.3%




PATTERN D*




No. 1 pcs	24"x48" - 60x120 cm	40%
No. 2 pcs	24"x24" - 60x60 cm	40%
No. 2 pcs	12"x24" - 30x60 cm	20%

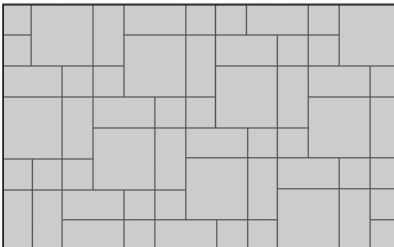


PATTERN B




No. 1 pcs	24"x24" - 60x60 cm	40%
No. 2 pcs	12"x24" - 30x60 cm	40%
No. 2 pcs	12"x12" - 30x30 cm	20%




PATTERN E*



No. 1 pcs	24"x48" - 60x120 cm	66.7%
No. 2 pcs	12"x48" - 60x120 cm	33.3%

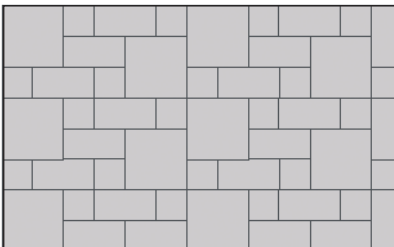

PATTERN C




No. 2 pcs	24"x24" - 60x60 cm	44.5%
No. 3 pcs	12"x24" - 30x60 cm	33.3%
No. 4 pcs	12"x12" - 30x30 cm	22.2%

Thermal Blue

24"x 24" - 60cm x 60cm
(23½" x 23½")

12"x 24" - 30cm x 60cm
(11¾" x 23½")

12"x 12" - 30cm x 30cm
(11¾" x 11¾")

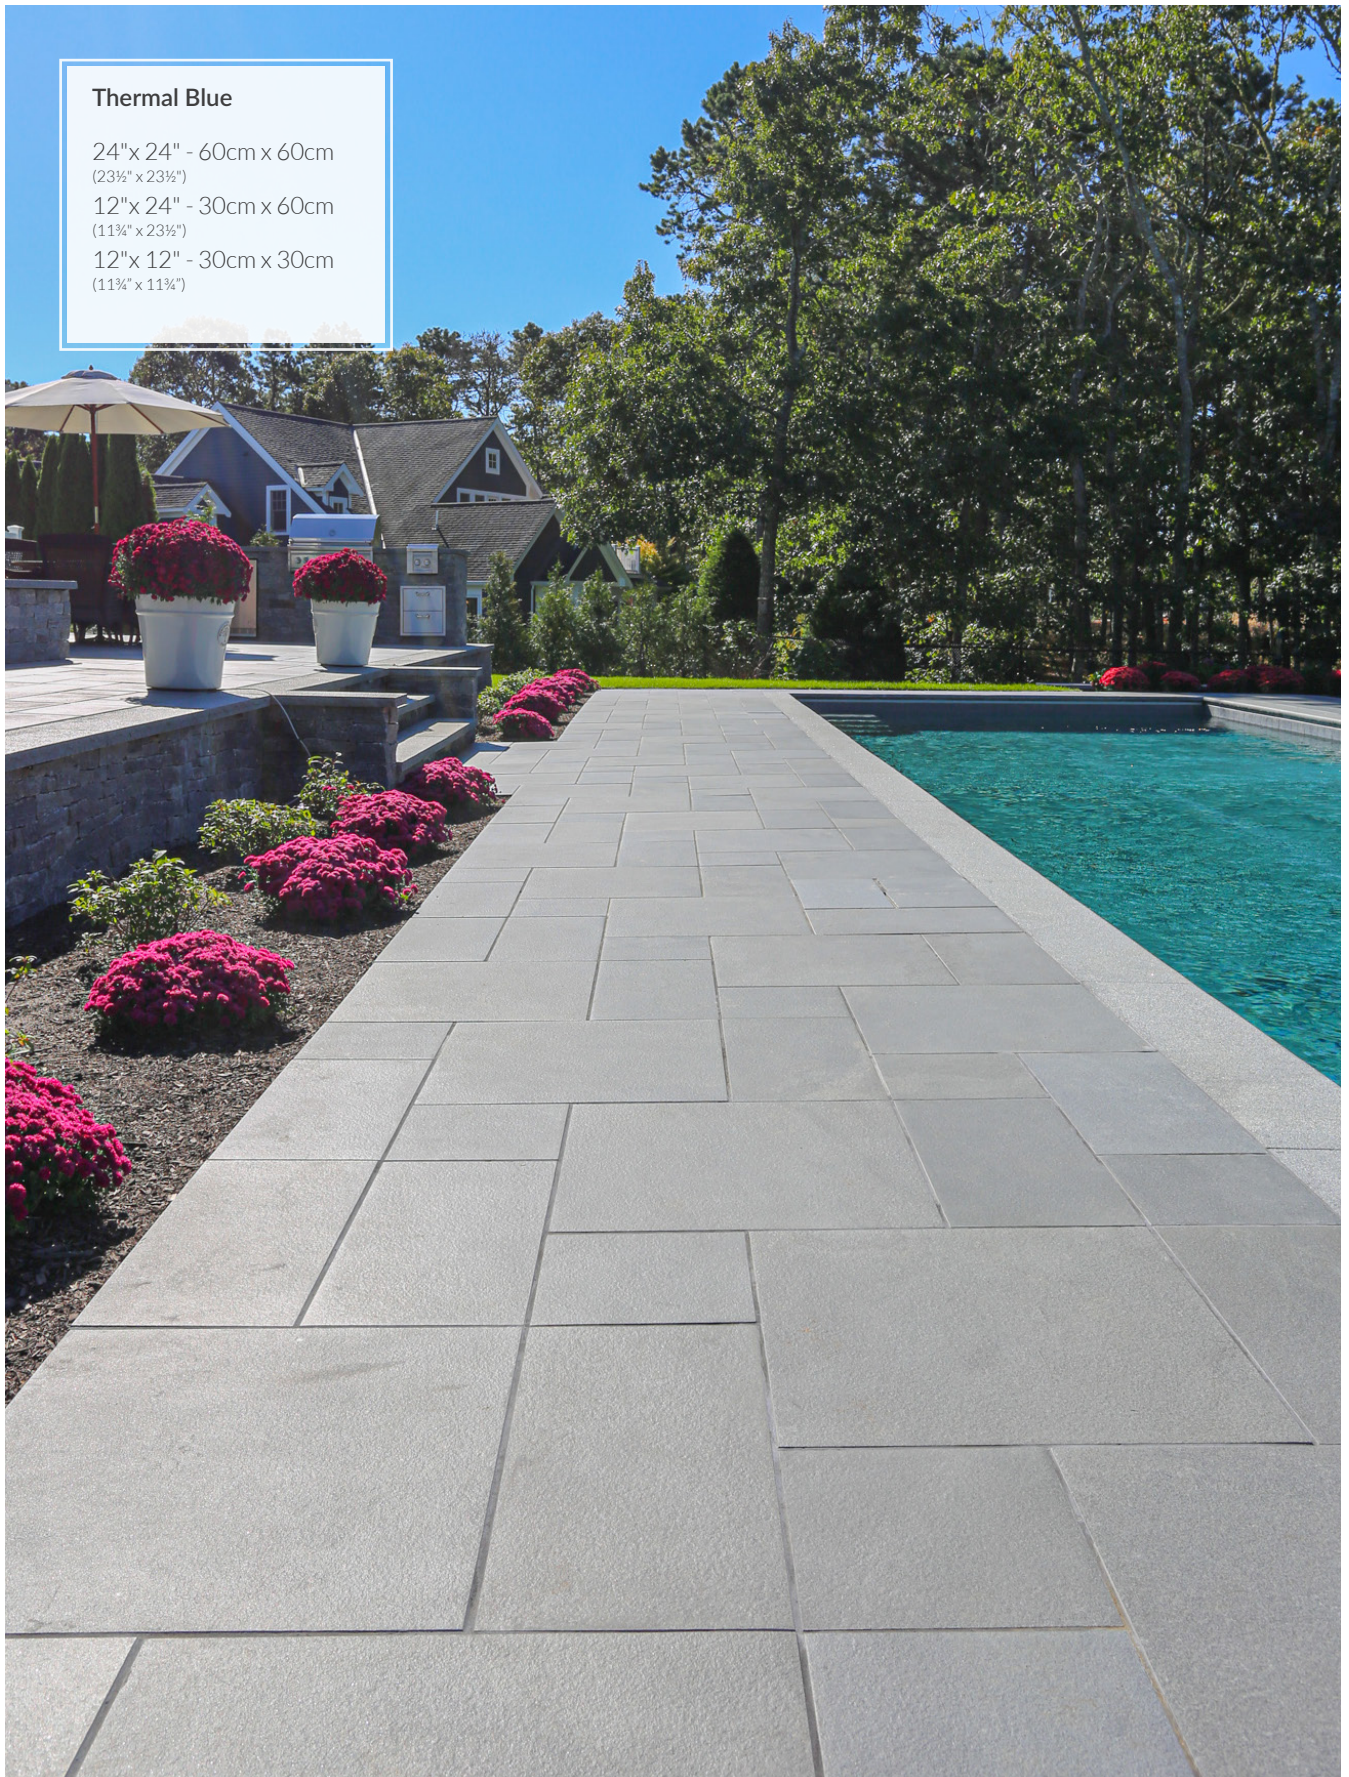



Full Color Variegated



Thermal Blue



Sand

Comparison of Technical Data

EVERBLUE™ Pavers VS. NATURAL PENNSYLVANIA Bluestone		
Data	EVERBLUE™ Pavers	NATURAL PENNSYLVANIA Bluestone
Water Absorption	0.05%	1.6%
Resistance to Stain	All	Not guaranteed
Chemical Resistance	Resistant	Not guaranteed
Fade Resistance on Exposure to Light and UV Rays	No fading or change in color	Change in color
Surfaces Fragility	No flaking or crumbling	Flakes and crumbles
Length & Width	Dimension proportions are guaranteed	Dimension proportions are not guaranteed
Uniformity of Thickness	Guaranteed	Not guaranteed
Frost & Salt Resistance	Guaranteed	Not guaranteed
Slip Resistance	Guaranteed	Not guaranteed
Installation on Pedestals/Raised Floor	Guaranteed	Not guaranteed
Average Weight	46 kg / sqm 9.38 lbs / sq. ft.	Real full color 160 kg / sqm 32.7 lbs / sq. ft. Real trueblue 110 kg / sqm 22.5 lbs / sq. ft.
Breaking Strength/Flexural Strength	3800 lbf	1900 lbf

Additional specs are located in the installation guide



EVERBLUE™