


FarmTRX

MOISTURE SENSOR

The FarmTRX Moisture Sensor adds moisture capability to your FarmTRX Yield Monitor.

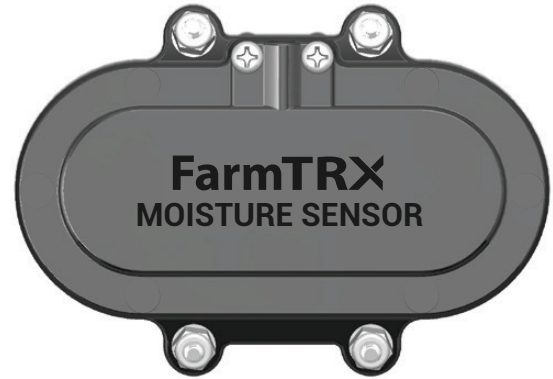

- ✓ View instant & average moisture values on the FarmTRX Mobile App while harvesting
- ✓ Moisture values enable wet & dry yield total calculations
- ✓ Determine weight and volume lost to moisture
- ✓ View & export moisture maps from the FarmTRX Web App

How it works: The FarmTRX Moisture Sensor uses the dielectric properties of grain flowing over it, which is directly related to the grain's moisture content.

Installation Overview:

Option 1: Plasma Cutter - Time: 30 Minutes

Remove clean grain elevator lower door. Determine mounting location using supplied instructions.

Clamp plasma cutter guide to door and cut hole for sensor face & mounting bolts.


Bolt moisture sensor to door, re-attach door to grain elevator, and plug wiring harness into Yield Monitor Interconnect Wiring Harness.

Option 2: Hole Saw & Grinder - Time 1 hr +

Remove clean grain elevator lower door. Determine mounting location using supplied instructions.

Tape drilling template to door, mark center points for hole-saw & mounting bolt locations. Using 1 3/4" hole saw, drill two holes at marked positions from template. Cut the remaining triangular sections using the template and a zipblade on a grinder. Drill mounting bolt locations.

Bolt moisture sensor to door, re-attach door to grain elevator, and plug wiring harness into Yield Monitor Interconnect Wiring Harness.

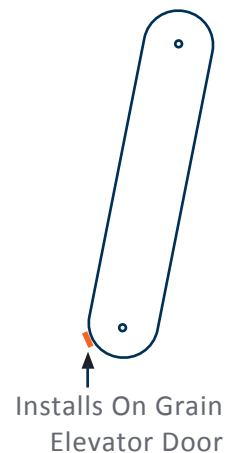

What's Included:

- ✓ Moisture Sensor
- ✓ Plasma Cutting Template
- ✓ Plug-and-Play Wiring Harness
- ✓ Mounting Hardware