
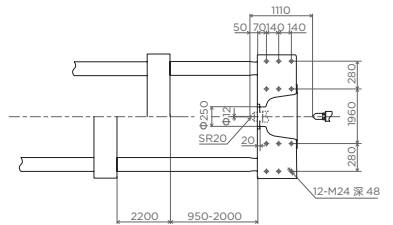


SK 系列技术参数表

SK SERIES TECHNICAL PARAMETER TABLE

项目 / 机型 Item/type		单位 Unit	SK2800/54000		SK2800/72000		SK3300/C72000		SK3300/C94000	
注射部分 Injection part										
螺杆型号 Screw type										
螺杆直径 Screw diameter		mm	190	210	215	230	215	230	240	260
螺杆长径比 Screw diameter ratio		L/D	23	21	23	20.5	23	20.5	23	21
理论注射容积 Theoretical injection volume		cm³	36840	45004	49350	56476	49350	56476	64207	75354
注射量 (PS) Injection volume (PS)		g	33893	41404	45402	51958	45402	51958	59070	69325
最大对空注射速率 Maximum rate for injection to air		cm³/s	1990	2431	2377	2720	2377	2720	2615	3069
注射压力 Injection pressure		MPa	146	120	147	128	147	128	146	125
注射行程 Injection stroke		mm	1300		1360		1360		1420	
最大注射速度 Maximum injection speed		mm/s	70		66		66		58	
螺杆最高转速 Maximal Rotational Speed of Screw		r/min	63		63		63		63	
锁模部分 Clamping part										
锁模力 Clamp Tonnage		KN	28000				33000			
移模行程 Toggle stroke		mm	2100				2200			
拉杆内间距 Distance between tie bars		mm×mm	1920×1720				2110×1910			
最大模厚 Maximum mould height		mm	1900				2000			
最小模厚 Minimum mould height		mm	850				950			
顶出行程 Ejection stroke		mm	500				550			
顶出力 Ejector force forward		KN	465				618			
顶针回缩力 Ejector force backard		KN	365				483			
顶针数量 Amount of die thimble		Pcs	1+32				1+32			
其它 Others										
电机功率 Motor power		KW	55+55+55+37		55+55+55+55		55+55+55+55		55+55+55+55+55	
电热功率 Heater power		KW	115		233		233		233	
温控区数量 Quantity of temperature-control zones			1+8		1+8		1+8		1+8	
料斗容积 Bucket capacity		kg	400				400			
油箱容积 Oil tank capacity		L	2000				2500			
外形尺寸 Boundary dimension(L×W×H)		m	19.6×4.4×4.2				21.5×4.45×5.6			
机器重量 Machine weight		Ton	190		205		255		265	

模板侧面尺寸
Side Dimension Of
The Molding Board

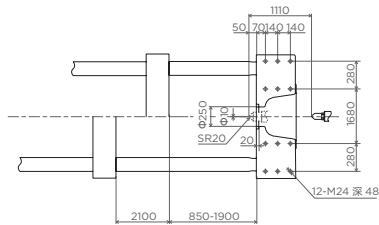

SK 系列模板正面尺寸
Front Dimension Of Sk Series
Molding Board

