
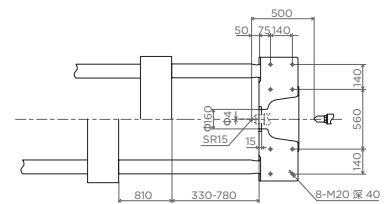


SK 系列技术参数表

SK SERIES TECHNICAL PARAMETER TABLE

项目 / 机型 Item/type		单位 Unit	SK350 / C2070				SK470/C2600			
注射部分 Injection part										
螺杆型号 Screw type			A	B	C	D	A	B	C	D
螺杆直径 Screw diameter		mm	60	65	70	75	65	70	75	80
螺杆长径比 Screw diameter ratio		L/D	22.5	21	21.5	20	22.5	21	21.3	20
理论注射容积 Theoretical injection volume		cm³	918	1078	1250	1435	1211	1404	1612	1834
注射量 (PS) Injection volume (PS)		g	835	981	1138	1306	1102	1278	1467	1669
最大对空注射速率 Maximum rate for injection to air		cm³/s	258	302	350	403	338	392	450	512
注射压力 Injection pressure		MPa	226	193	166	145	215	186	162	142
注射行程 Injection stroke		mm	325				365			
最大注射速度 Maximum injection speed		mm/s	92				102			
螺杆最高转速 Maximal Rotational Speed of Screw		r/min	182				192			
锁模部分 Clamping part										
锁模力 Clamp Tonnage		KN	3500				4700			
移模行程 Toggle stroke		mm	700				810			
拉杆内间距 Distance between tie bars		mm×mm	713×660				765×712			
最大模厚 Maximum mould height		mm	730				780			
最小模厚 Minimum mould height		mm	330				330			
顶出行程 Ejection stroke		mm	190				210			
顶出力 Ejector force forward		KN	123				123			
顶针回缩力 Ejector force backard		KN	89				89			
顶针数量 Amount of die thimble		Pcs	1+12				1+12			
其它 Others										
电机功率 Motor power		KW	37				45			
电热功率 Heater power		KW	24.95/28.55				26.85/30.45			
温控区数量 Quantity of temperature-control zones			1+5				1+5			
料斗容积 Bucket capacity		kg	50				50			
油箱容积 Oil tank capacity		L	520				580			
外形尺寸 Boundary dimension(L×W×H)		m	7.1×1.75×2.2				7.6×1.8×2.3			
机器重量 Machine weight		Ton	13				16.2			

模板侧面尺寸
Side Dimension Of
The Molding Board

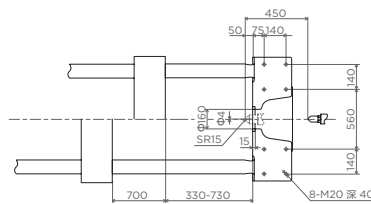

SK 系列模板正面尺寸
Front Dimension Of Sk Series
Molding Board

