

95 Hudson River Road, Ste. 1, Waterford, NY 12188

Tel: (518) 238-3457 • Fax (518) 233-0123

BOBL@UPSTATEPP.COM • CHRISBY@UPSTATEPP.COM • WWW.UPSTATEPP.COM

PIPING PRODUCTS



VALVES



TEFLON LINED VESSELS & ACCESSORIES



STRAINERS



DIAPHRAGM PUMP



EXPANSION JOINTS




TASK-LINE GASKETS



SIGHT FLOW INDICATOR



CHEMICAL/HIGH PURITY HOSES

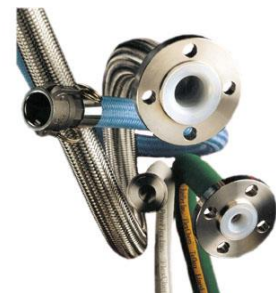

FLANGEX FLARING MACHINE



95 Hudson River Road, Ste. 1, Waterford, NY 12188

Tel: (518) 238-3457 • Fax (518) 233-0123

BOBL@UPSTATEPP.COM • CHRISBY@UPSTATEPP.COM • WWW.UPSTATEPP.COM

CHEMICAL COMPATABILITY DRIVES

The type of pipe & fittings that should be selected:

Vinyl, Epoxy and Furan

- Pressures to 300 psi
- Temp rating (-)40°F to (+)200°F
- 10 ml exterior corrosion barrier
- UV inhibitors – 25-year warranty

Gorilla Fittings – Fully Resin Rich Liner


Lined Pipe & Fittings (PTFE-PFA-ETFE-PVDF)

CHEMTITE - CS and SS Lined pipe

- Pressures to 200 psi
- Temp rating (-)20°F to (+)400°F
- Resistant to all acids, solvents, bleach solutions, phenols, caustics, peroxides and more

DURCOR - High Strength FRP Composite PTFE Lined Piping System

- ZERO CORROSION RATE
- Size range 1" to 8"
- Pressures to 275 psi
- Temp ratings uninsulated (-)40°F to (+)300°F
- No exterior priming or painting requested
- ¼ the weight of steel
- Lower Freight Cost
- Faster & Safer to install
- Superior strength to weight ratio

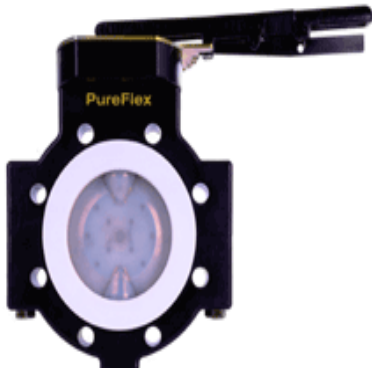

**End Corrosion Attack
with Durcor®**

