

CLIMBING EQUIPMENT



#1 PRO LADDER™



# LEADING THE WAY IN CLIMBING SOLUTIONS



At Werner, "Get Home Safe" is more than a motto — it's our mission. Whether you're working at 5 feet or 50 stories off the ground, work confidently with Werner. From ladders to fall protection, Werner offers you a full line of climbing equipment that's engineered to provide maximum stability, safety and comfort at every height. Our products are designed to be used anywhere from the home to the most demanding job sites.

We continually strive to improve manufacturing techniques through ongoing testing and facility investment. Recognized for their durability, quality and safety, Werner products are developed based on application, industry research, product testing and customer insight to ensure the highest quality standards that meet the needs of our end users.



Werner remains the market leader today by continually enhancing and improving its product offering. Recently, the Werner 6200 Series Stepladders were redesigned for better performance and productivity, which included an upgraded ladder top and enhanced bracing for overall durability. Our number one professional grade ladder series was upgraded specifically for professional contractors and continues to be a dependable tool on jobsites everywhere.

## PRODUCT CERTIFICATIONS

Werner ladders are manufactured and tested to the strictest quality standards. All Werner ladders meet or exceed American National Standards Institute (ANSI) and Occupational Safety and Health Administration (OSHA) requirements, where applicable.



### OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION CODE

All Type II, I, IA and IAA fiberglass, aluminum and wood ladders, ladder jacks and extension planks meet or exceed code. OSHA CODE applies to ladders used in the workplace. Werner Co. recommends Type II or heavier duty rated ladders for these applications.



### AMERICAN NATIONAL STANDARDS INSTITUTE

#### PRODUCT LINES MEET OR EXCEED ANSI CODE

Fiberglass Ladders .... A14.5 (2017)  
Aluminum Ladders ..... A14.2 (2017)  
Ladder Jacks ..... A10.8 (2019)  
Extension Planks ..... A10.8 (2019)  
Scaffolding ..... A10.8 (2019)  
Stages ..... A10.8 (2019)  
Work Platforms ..... A10.8 (2019)  
Attic Ladders ..... A14.9 (2019)  
Ladder Accessories ... A14.8 (2013)  
Step Stools ..... A14.11 (2018)

WERNER CLIMBING EQUIPMENT

CLIMBING SOLUTIONS ..... 2

CHOOSING THE RIGHT LADDER FOR THE JOB ..... 4-5

FIBERGLASS

STEPLADDERS ..... 8-25

LEANSAFE ..... 13

STEP STOOLS ..... 16-17

PODIUM LADDERS ..... 18-24

MULTI-LADDERS ..... 25-27

EXTENSION LADDERS ..... 28-41

ALUMINUM

STEPLADDERS ..... 42-49

PLATFORMS ..... 45-47

STEP STOOLS ..... 48-49

WORK PLATFORMS ..... 50-51

MULTI-LADDERS ..... 52-53

EXTENSION LADDERS ..... 54-59

ATTIC LADDERS ..... 60

PORTABLE SCAFFOLDING ..... 61-62

PLANKS ..... 62-63

PUMP JACK SYSTEM ..... 64-65

SCAFFOLDING & STAGES ..... 67

ACCESSORIES

LOCK-IN ACCESSORY SYSTEM ..... 68

STEPLADDER ..... 69

LEVELSAFE PRO ..... 70


WALKTHRU ..... 71

EXTENSION LADDER ..... 72-75

NOTE: Werner is updating our products to reflect our latest branding, including more consistent colors and enhanced safety communications. During this transition, you may receive products that differ slightly from the images shown. Additionally, colors in this catalog are for reference only and may vary due to screen resolution, lighting, and material differences. All products meet ANSI and OSHA specifications.




## STEP 1 SELECT HEIGHT (SIZE)

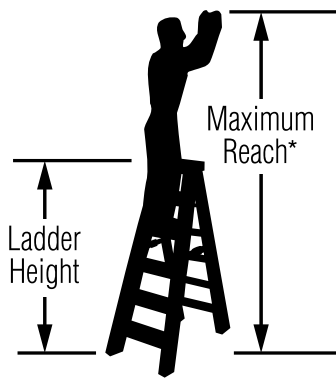


STEPLADDERS	
Ladder Height	Maximum Reach*
4'	8'
6'	10'
7'	11'
8'	12'
10'	14'
12'	16'
14'	18'
16'	20'

### Average Heights

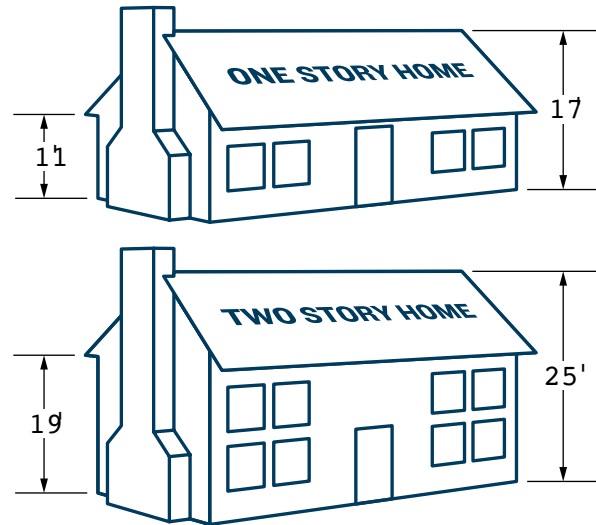


\*Assumes a 5'6" person with a vertical 12" reach.

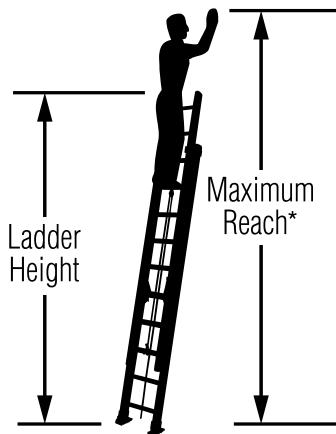

EXTENSION LADDERS		
Ladder Height	Maximum Reach*	Height To Gutter or Top Support Point††
16'	15'	9' max.
20'	19'	9' to 13'
24'	23'	13' to 17'
28'	27'	17' to 21'
32'	31'	21' to 25'
36'	34'	25' to 28'
40'	37'	28' to 31'

†† Support points for extension ladders reflect section overlap, ladder angle, or 3' extension above roof line.

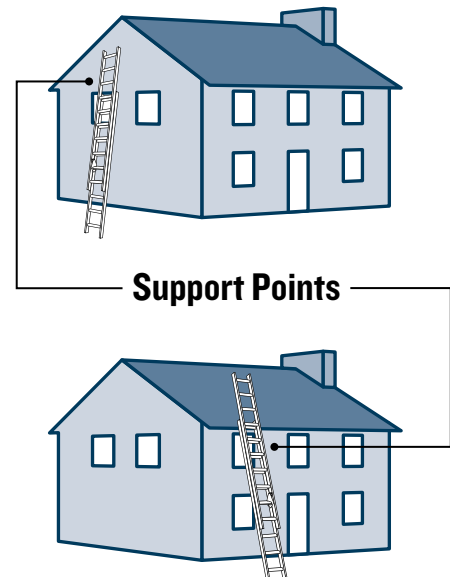



STEP **2** **SELECT PERFORMANCE (DUTY RATING)**

**200-225lb**  
LOAD CAPACITY

LIGHT DUTY BASIC DESIGNS

**250lb**  
LOAD CAPACITY

MEDIUM DUTY INNOVATIVE DESIGNS

**300lb**  
LOAD CAPACITY

HEAVY DUTY RUGGED & DURABLE

**375lb**  
LOAD CAPACITY

COMMERCIAL GRADE MOST DURABLE

STEP **3** **SELECT MATERIAL**



NON CONDUCTIVE FOR WORKING  
NEAR ELECTRICITY



DESIGNED AND TESTED FOR  
EXTREME TEMPERATURES



WON'T DENT, SHATTER, RUST  
OR CORRODE



HIGH VISIBILITY COLOR



NOT FOR USE  
NEAR ELECTRICITY



DESIGNED AND TESTED FOR  
EXTREME TEMPERATURES



WON'T DENT, SHATTER, RUST  
OR CORRODE



**SAFETY ABOVE ALL**



ICONOGRAPHIC SAFETY LABELS  
**Safety Training Videos**  
ACCESSIBLE ON THE JOBSITE



# INCREASE JOBSITE SAFETY & MAXIMIZE PRODUCTIVITY

WITH NEWLY ENHANCED STEP, PODIUM & PLATFORM LADDERS



Quick-reference, multi-lingual safety labels  
and access to interactive video for  
improved compliance



Duty rating labels, rail colors and yellow  
tops/feet improve visibility and signal  
safety on the jobsite



Patented LOCKTOP™ holds an arsenal  
of tools to increase productivity

LEARN MORE AT  
**wernerco.com**



WE OFFER SAFETY TRAINING,  
**SIGN-UP TODAY!**





# THE BEST TOPS IN THE INDUSTRY

Compatible with Impact Drivers



Next generation ladder top holds an arsenal of tools



Customize your ladder top with the Lock-In Accessory System



Sturdy paint can hanger decreases chances of spilling



Keeps tools within easy reach with the HolsterTop®



Convenient pail shelf provides additional work surface




## 6300SERIES Stepladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING



**COMPATIBLE**  
SEE PAGE 60

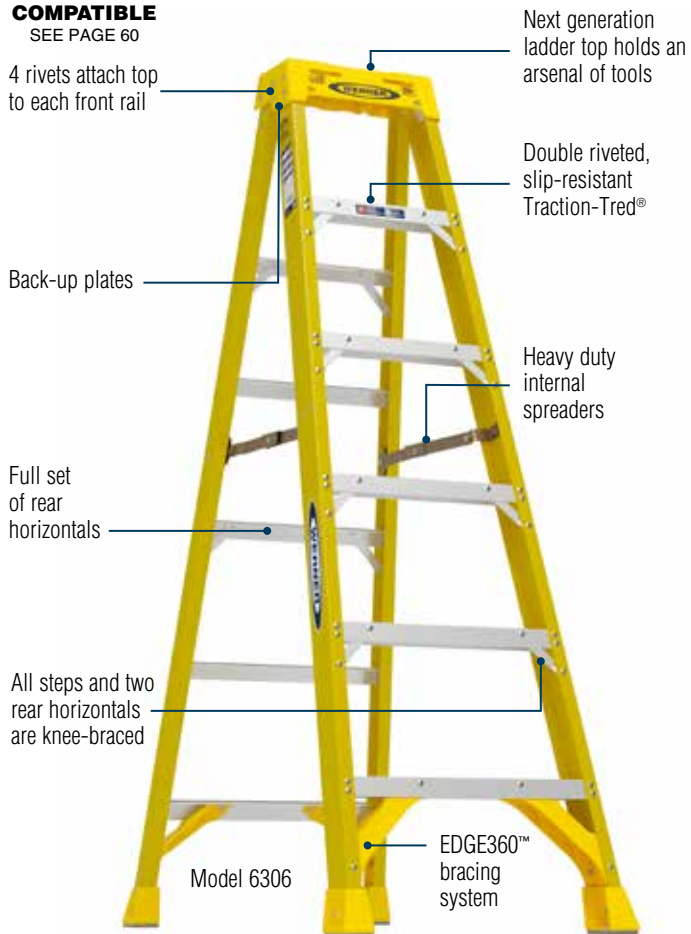

- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails
- Optional yellow molded pail shelf kit, model no. 76-2

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
6304	4'	19-7/8"	29"	3.0	16.0
6305	5'	21-5/8"	35-1/8"	4.1	19.0
6306	6'	23-3/8"	41-1/4"	5.3	22.0
6308	8'	26-7/8"	53-5/8"	8.1	30.0
6310	10'	30-3/8"	65-7/8"	12.5	39.0
6312	12'	33-7/8"	78-1/4"	15.0	49.0

### DIMENSIONS

Top:	5-3/4" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide


## 6200SERIES Stepladder

**300lbs.** LOAD CAPACITY PER SIDE

**TYPE IA**  
DUTY RATING



**COMPATIBLE**  
SEE PAGE 60

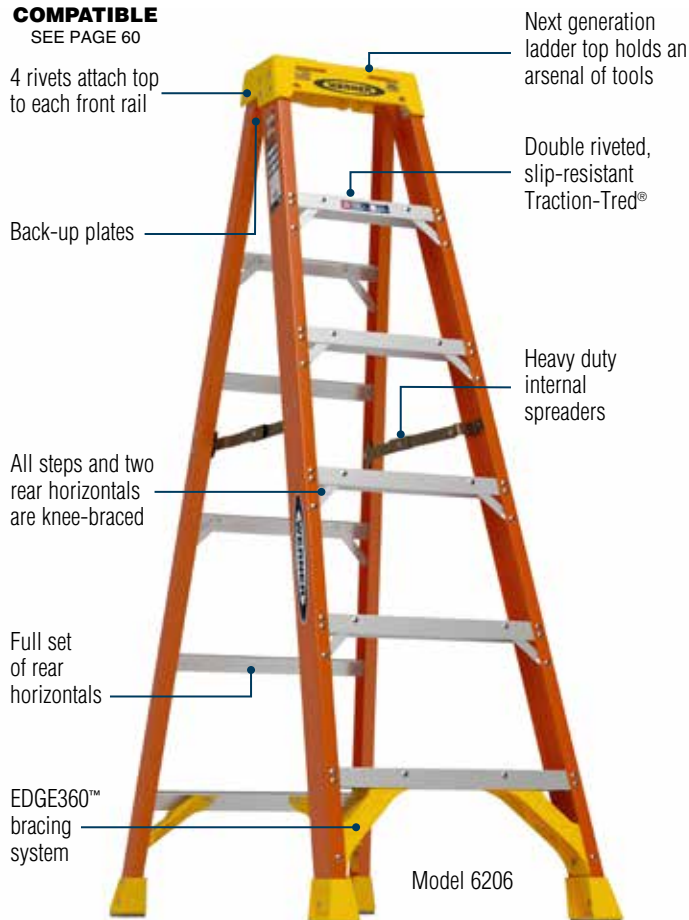

Model 6206

- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails
- Optional yellow molded pail shelf kit, model no. 76-2

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
6203	3'	18-1/8"	23-1/8"	2.0	13.0
6204	4'	19-7/8"	29"	3.0	16.0
6205	5'	21-5/8"	35-1/8"	4.1	19.0
6206	6'	23-3/8"	41-1/4"	5.3	22.0
6207	7'	25-1/8"	47-1/2"	6.6	26.0
6208	8'	26-7/8"	53-5/8"	8.1	30.0
6210	10'	30-3/8"	65-7/8"	12.5	39.0
6212	12'	33-7/8"	78-1/4"	15.0	48.0


### DIMENSIONS

Top:	5-3/4" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide

## T6200SERIES Twin Stepladder††

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

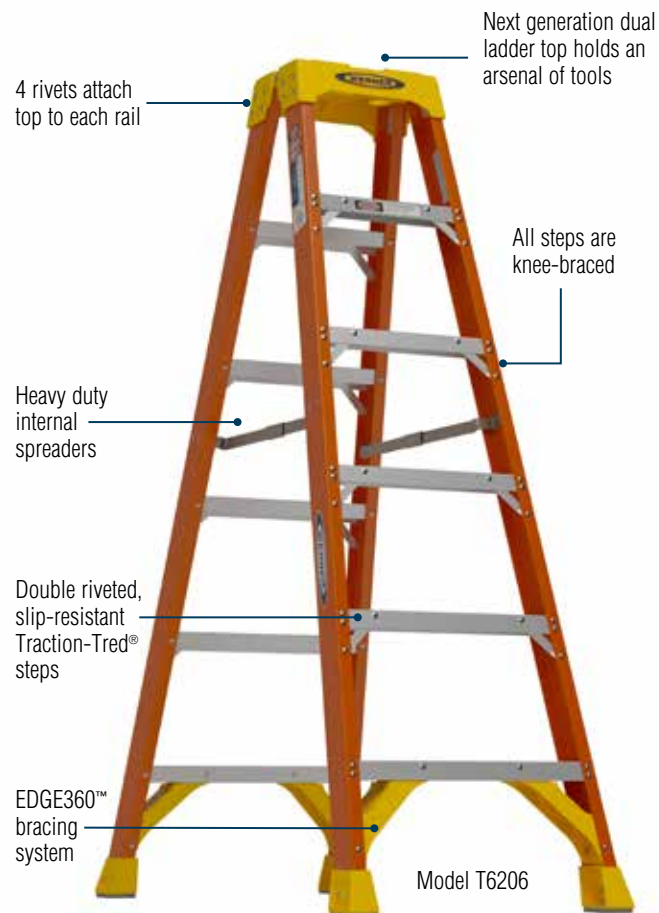

Model T6206

- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T6203	3'	18-1/8"	29"	3.1	16.0
T6204	4'	19-7/8"	36-1/8"	4.6	19.0
T6205	5'	21-5/8"	43-1/8"	6.2	23.0
T6206	6'	23-3/8"	50-1/8"	8.0	27.0
T6208	8'	26-7/8"	64-1/8"	12.3	37.0
T6210	10'	30-3/8"	78-1/8"	17.3	54.5
T6212	12'	33-7/8"	92-1/8"	23.2	68.5

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

### DIMENSIONS

Top:	8-1/2" x 13"	Steps:	3" wide
Rails:	3-1/8" wide	Flange:	1-3/16" wide





## 7400SERIES Stepladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING



\* Energy Diffusing Geometry

- Every rivet backed up by metal plate or washer to protect rails

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
7403	3'	19-3/4"	24-3/8"	2.5	13.5
7404	4'	21-1/2"	30-1/2"	3.5	16.5
7405	5'	23-1/4"	36-3/4"	4.6	20.0
7406	6'	25"	42-7/8"	5.8	23.5
7407	7'	26-3/4"	49"	7.1	28.0
7408	8'	28-1/2"	55-1/4"	8.5	32.0
7410	10'	32"	67-1/2"	11.4	40.5
7412	12'	35-1/2"	79-7/8"	14.8	49.5

### DIMENSIONS

Top:	7-1/4" x 14-7/8"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide

## T7400SERIES

## Multi-Use Twin Stepladder††

**375lbs.** LOAD CAPACITY PER SIDE

**TYPE IAA**  
DUTY RATING



\* Energy Diffusing Geometry

- Every rivet backed up by metal plate or washer to protect rails

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T7404	4'	21-1/2"	36-1/8"	4.5	21.5
T7405	5'	23-1/2"	43-1/8"	5.8	29.0
T7406	6'	25"	50-1/8"	7.3	30.0
T7408	8'	28-1/2"	64-1/8"	10.5	40.5
T7410	10'	32"	78-1/4"	14.2	51.5
T7412	12'	35-1/2"	92-1/4"	18.3	63.5

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

### DIMENSIONS

Top:	8-1/4" x 14-1/2"	Steps:	3" wide
Rails:	3-1/8" wide	Flange:	1-3/16" wide




# T7400SERIES

## Multi-Use Twin Stepladder††

**300lbs** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

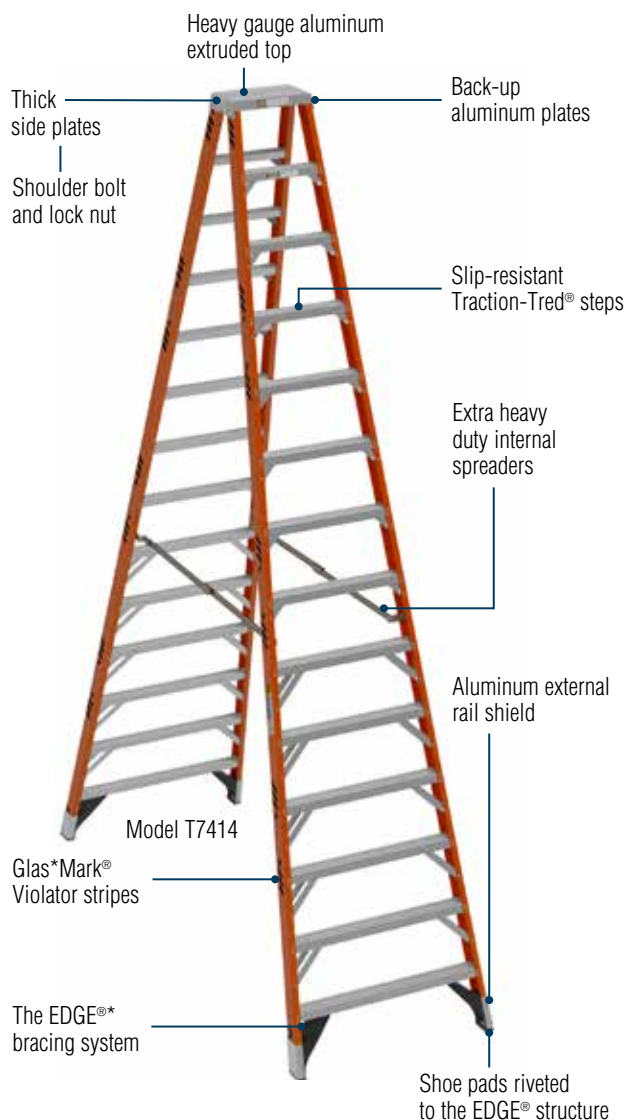

\* Energy Diffusing Geometry

- Every rivet backed up by metal plate or washer to protect rails

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T7414	14'	39"	106-1/4"	22.8	86.0
T7416	16'	42-1/2"	120-1/4"	27.7	103.5
T7418	18'	46"	136-1/8"	33.1	126.0
T7420	20'	49-1/2"	150-1/8"	38.8	149.0

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

### DIMENSIONS

Top:	8-1/4" x 14-1/2"	Steps:	3" wide
Rails:	3-1/8" wide	Flange:	1-3/16" wide



**FIBERGLASS STEPLADDERS**

**FOR WORKING AROUND ELECTRICITY. NON-CONDUCTIVE SIDE RAILS.**






## 7300SERIES Stepladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING

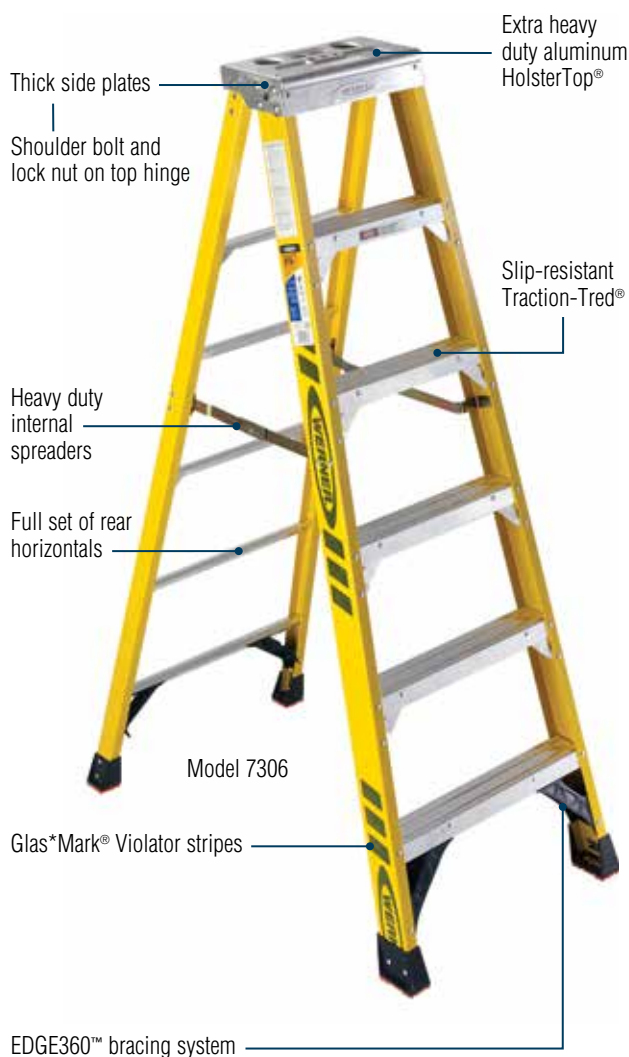

Model 7306

- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
7303	3'	19-3/4"	23-1/2"	2.5	13.0
7304	4'	21-1/2"	29-3/4"	3.5	16.0
7305	5'	23-1/4"	35-7/8"	4.6	19.5
7306	6'	25"	42"	5.8	22.5
7308	8'	28-1/2"	54-3/4"	8.5	31.0
7310	10'	32"	66-5/8"	11.4	40.5
7312	12'	35-1/2"	79"	14.8	50.0

### DIMENSIONS

Top:	7-1/4" x 14-7/8"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide

## 7300SSERIES Stepladder with Pail Shelf

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING



Model 7306


- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
7303S	3'	19-3/4"	23-1/2"	2.5	16.5
7304S	4'	21-1/2"	29-3/4"	3.5	19.5
7305S	5'	23-1/4"	35-7/8"	4.6	23.0
7306S	6'	25"	42"	5.8	26.0
7308S	8'	28-1/2"	54-3/4"	8.5	34.0
7310S	10'	32"	66-5/8"	11.4	43.5
7312S	12'	35-1/2"	79"	14.8	53.0

### DIMENSIONS

Top:	7-1/4" x 14-7/8"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide

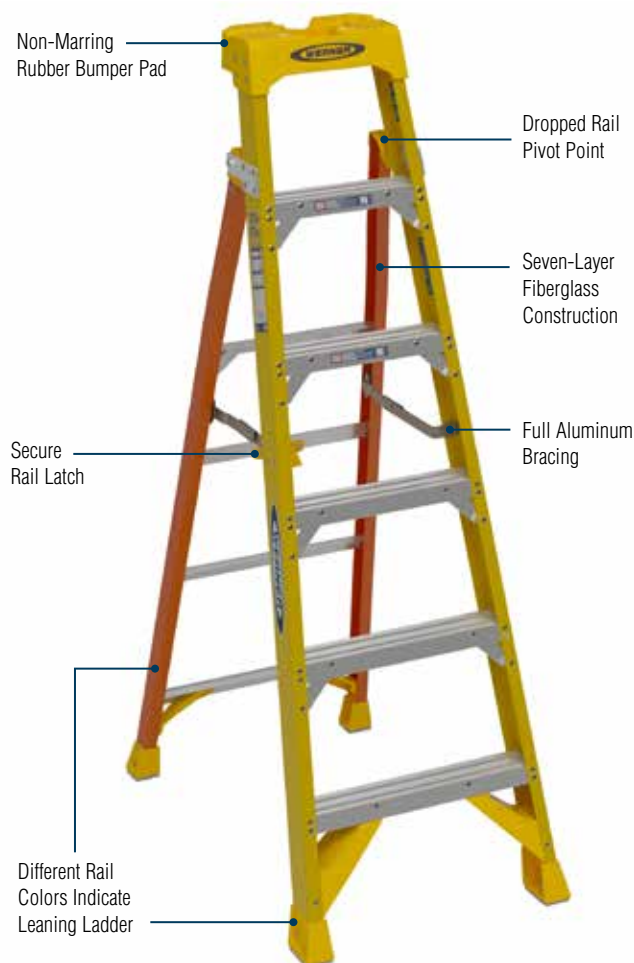
**L7300SERIES** Leansafe Ladder**375lbs.** LOAD CAPACITY**TYPE IAA**  
DUTY RATING

- Designed to lean up against walls, corners and poles
- Non-marring rubber pad protects the wall in leaning mode
- LEANSAFE™ ladder top is designed to secure tools and increase productivity
- Front and rear rail are different color for added visual safety
- Rail latch locks legs together when in leaning mode
- Curved foot pads to maximize surface area when in stepladder and leaning mode

**SPECIFICATIONS**

Model No.	Size	Stepladder Mode		Leaning Mode	
		Max. Standing Height	Max. Reach Height	Max. Standing Height	Max. Reach Height
L7304	4'	1'-8"	8'-4"	10"	7'-3"
L7306	6'	3'-10"	10'	2'-10"	9'
L7308	8'	5'-9"	12'	4'-9"	11'
L7310	10'	7'-8"	14'	6'-8"	13'
L7312	12'	9'-7"	16'	8'-7"	15'

\*assumes a 5'-6" person with a vertical 12" reach

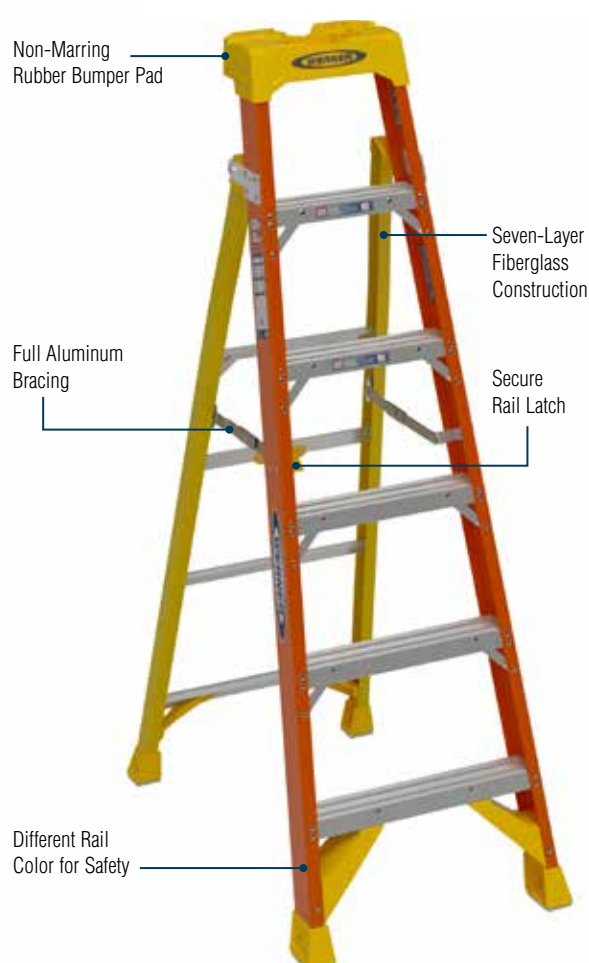**L6200SERIES** Leansafe Ladder**300lbs.** LOAD CAPACITY**TYPE IA**  
DUTY RATING

- Designed to lean up against walls, corners and poles
- Non-marring rubber pad protects the wall in leaning mode
- LEANSAFE™ ladder top is designed to secure tools and increase productivity
- Front and rear rail are different color for added visual safety
- Rail latch locks legs together when in leaning mode
- Curved foot pads to maximize surface area when in stepladder and leaning mode

**SPECIFICATIONS**

Model No.	Size	Stepladder Mode		Leaning Mode	
		Max. Standing Height	Max. Reach Height	Max. Standing Height	Max. Reach Height
L6204	4'	1'-8"	8'-4"	10"	7'-3"
L6206	6'	3'-10"	10'	2'-10"	9'
L6208	8'	5'-9"	12'	4'-9"	11'
L6210	10'	7'-8"	14'	6'-8"	13'
L6212	12'	9'-7"	16'	8'-7"	15'

\*assumes a 5'-6" person with a vertical 12" reach








# 6100SERIES Stepladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

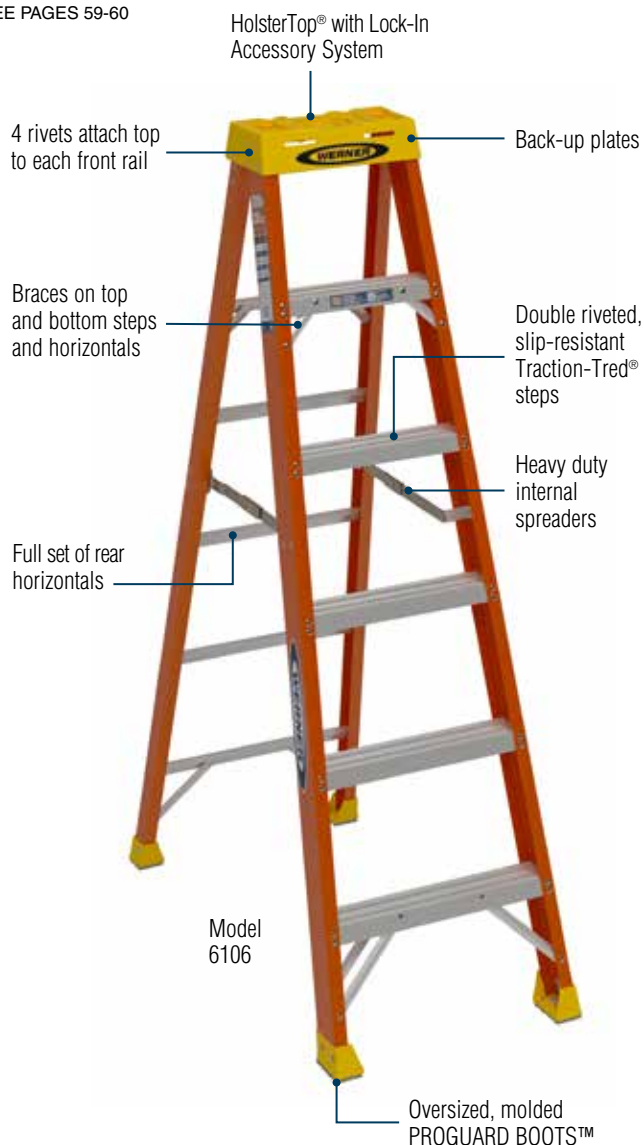

## SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
6104	4'	19"	28-7/8"	2.6	15.0
6106	6'	22"	41-1/8"	4.5	21.0
6108	8'	25"	53-1/2"	6.8	30.0
6110	10'	28"	65-3/4"	13.0	35.5
6112	12'	31"	78-1/8"	17.3	44.0


## DIMENSIONS

Top:	5-3/4" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Flange:	1-3/16" wide		

# 6000SERIES Stepladder

**250lbs.** LOAD CAPACITY PER SIDE

**TYPE I**  
DUTY RATING

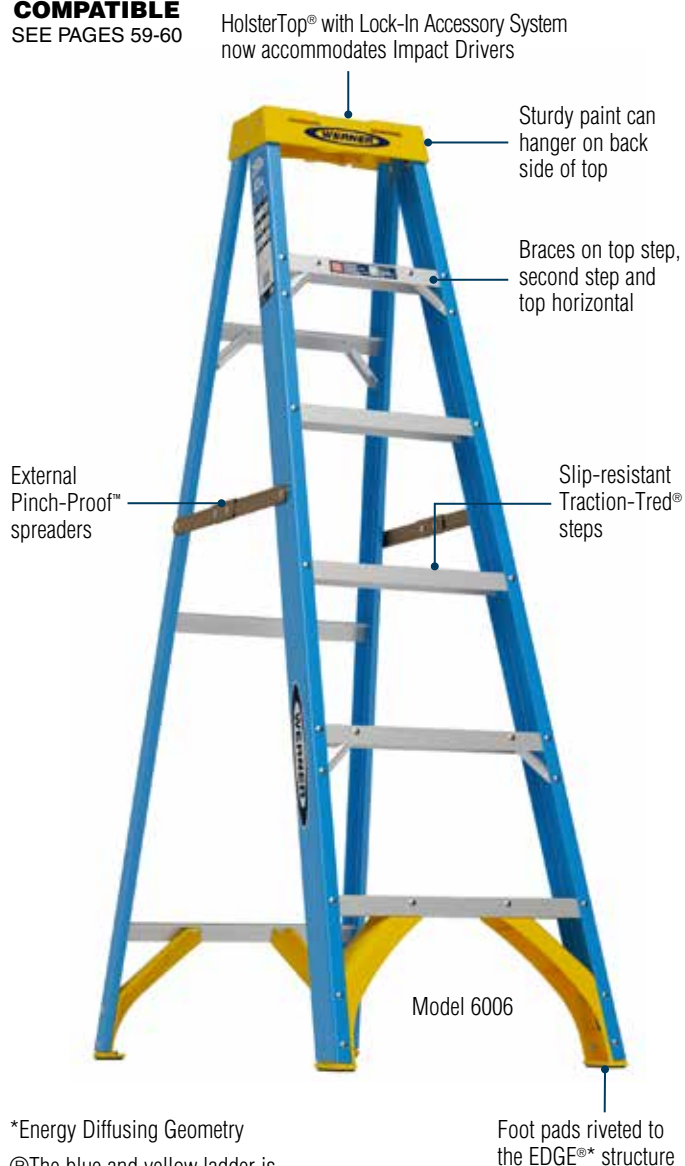

\*Energy Diffusing Geometry  
©The blue and yellow ladder is an exclusive registered trademark of Werner Co.

## SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
6004	4'	19"	28-7/8"	2.6	13.0
6005	5'	20-1/2"	35"	3.5	16.0
6006	6'	22"	41-1/8"	4.5	18.0
6008	8'	25"	53-1/2"	6.8	25.5

## DIMENSIONS

Top:	5-3/4" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-1/8" wide	Rear Flange:	1-3/16" wide back 5/8" wide front



## 5900SERIES Stepladder

**225lbs.** LOAD CAPACITY



**COMPATIBLE**  
SEE PAGES 59-60

**TYPE II**  
DUTY RATING



### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
5904	4'	19"	28-7/8"	2.6	11.5
5906	6'	22"	41-1/8"	4.5	16.0
5908	8'	25"	53-1/2"	6.8	22.5

### DIMENSIONS

Top:	5-3/8" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-1/8" wide	Rear Flange:	1-3/16" wide

## 6000SERIES Stepladder

**250lbs.** LOAD CAPACITY PER SIDE

**TYPE I**  
DUTY RATING



**COMPATIBLE**  
SEE PAGES 59-60

Model 6006S



### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
6004S	4'	19"	28-7/8"	2.6	15.0
6006S	6'	22"	41-1/8"	4.5	20.0

### DIMENSIONS

Top:	5-3/4" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-1/8" wide	Rear Flange:	1-3/16" wide back 5/8" wide front

## 5900SSERIES Stepladder

**225lbs.** LOAD CAPACITY PER SIDE

**TYPE II**  
DUTY RATING

Model 5906S



### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
5906S	6'	22"	41-1/8"	4.5	16.5
5908S	8'	25"	53-1/2"	6.8	23.0

### DIMENSIONS

Top:	5-3/8" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-1/8" wide	Rear Flange:	1-3/16" wide



## SSFOOSERIES Step Stand

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING



Permanently locking spreader for durability & stability

(Note Once opened, remains permanently locked in open position)

### SPECIFICATIONS

Model No.	Size	Maximum Standing Height	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
SSF02	2'	20"	17"	21"	2.6	15.0
SSF03	3'	30"	18-3/4"	27-1/2"	4.0	19.5

### DIMENSIONS

Top:	9" x 14"	Steps:	6" wide
Front Rails:	6" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-1/8" wide	Rear Flange:	1-3/16" wide

## 6202MODEL Step Stool

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING



### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
6202	2'	17-1/4"	19-1/2"	1.4	9.0


### DIMENSIONS

Top:	7" x 12-3/8"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide, 5/8" wide front

## T6202MODEL Twin Step Stool††

**300lbs.** LOAD CAPACITY PER SIDE

**TYPE IA**  
DUTY RATING

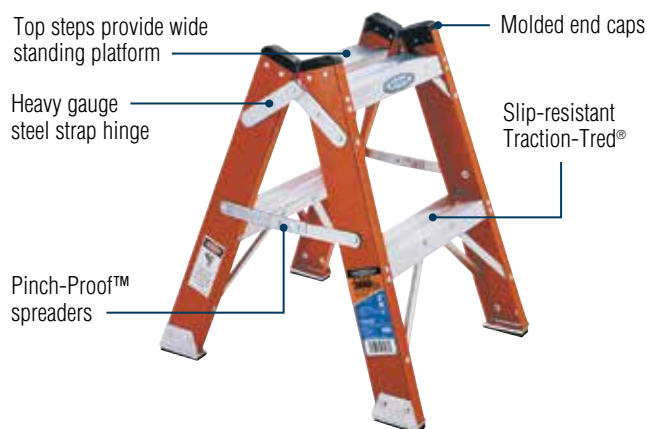

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T6202	2'	21-1/8"	23"	2.1	11.5

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

### DIMENSIONS

Steps:	3" wide
Rails:	3-1/8" wide
Flange:	1-3/16" wide


Note: Planks or platforms shall be secured to the step stools. The ends of each plank or platform shall extend beyond the outside edge of each step stool by a minimum of 4 inches and a maximum of 10 inches.



## TW6200SERIES ††

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

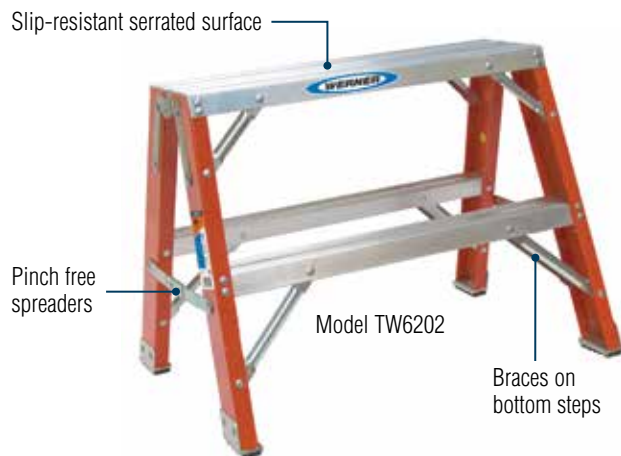

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
TW6202	2'	31-1/4"	22-1/4"	3.0	17.0
TW6203	3'	32-3/4"	29-3/4"	4.7	24.0

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

### DIMENSIONS

Top:	8" x 28"	Steps:	3" wide
Rails:	3-1/4" wide	Flange:	1-3/16" wide

## 6002MODEL Step Stool

**250lbs** LOAD CAPACITY

**TYPE I**  
DUTY RATING



©The blue and yellow ladder is an exclusive registered trademark of Werner Co.

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
6002	2'	17-1/4"	19-1/2"	1.4	8.5

### DIMENSIONS

Top:	7" x 12-3/8"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-1/8" wide	Rear Flange:	1-3/16" wide back 5/8" wide front





# PODIUM

## Work facing any direction

- **4X WORK ZONE > 360° Work Zone**

Allows you to work facing any direction so you can accomplish more without having to reposition your ladder.

- Ideal for working at fixed heights and easier to maneuver than scaffolds or lifts.
- Feel like you're standing on the ground with the extra-large platform, 36" high extended guard rail and LOCKTOP™ wrap around ladder top.
- Podium platform with toe guard
- Available in Type IAA (375lb capacity) and Type IA (300lb capacity) Duty Ratings
- Available with factory-installed casters for improved mobility
- For working around electricity. Non-conductive side rails.



Extended guard rail securely wraps around work zone and holds an arsenal of tools



Extra-large standing platform for long standing comfort





## PD7300SERIES Podium Ladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING



- Ideal for working at fixed heights
- Customize your ladder top with the Lock-In Accessory System
- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails
- Internal aluminum spreaders on 6' and 8' models

### SPECIFICATIONS

Model No.	Height (Size) to Platform	Max. Reach	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
PD7303	3'	9'	26"	37"	9.2	21.0
PD7304	4'	10'	27-1/2"	43"	11.3	26.5
PD7305	5'	11'	29-1/4"	50"	13.8	32.5
PD7306	6'	12'	31"	56"	16.4	36.0
PD7307	7'	13'	33"	62"	19.4	38.0
PD7308	8'	14'	34-1/2"	68"	22.3	45.5
PD7310	10'	16'	38-1/2"	81"	29.1	60.0
PD7312	12'	18'	41-1/2"	93"	36.8	66.5

### DIMENSIONS

Platform:	16" x 19.5"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide

## PD7300-4CSERIES Podium Ladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING



- Ideal for working at fixed heights, easier to maneuver than scaffolds or lifts
- Customize your ladder top with the Lock-In Accessory System
- Every rivet backed up by metal plate or washer to protect rails
- Internal aluminum spreaders on 6' and 8' models

### SPECIFICATIONS

Model No.	Height (Size) to Platform	Max. Reach	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
PD7303-4C	3'	9'	26"	37"	9.2	28.3
PD7304-4C	4'	10'	27-1/2"	43"	11.3	33.85
PD7305-4C	5'	11'	29-1/4"	50"	13.8	41.0
PD7306-4C	6'	12'	31"	56"	16.4	45.8
PD7307-4C	7'	13'	33"	62"	19.4	47.0
PD7308-4C	8'	14'	34-1/2"	68"	22.3	52.8
PD7310-4C	10'	16'	38-1/2"	81"	29.1	68.0
PD7312-4C	12'	18'	41-1/2"	93"	36.8	74.5

### DIMENSIONS

Platform:	16" x 19.5"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide







# PODIUM GATE



Fully surrounds the user



Helps keep the ladder user inside the ladder footprint

Neatly collapses for easy access and storage




## Attaches to any Werner Podium

- Easily retrofitted; convenient and affordable
- Fully surrounds the user
- Helps keep the ladder user inside the ladder footprint
- Work facing any direction
- Neatly collapses for easy access and storage
- Field installation takes 20 minutes



Folds up for storage



Fully surrounds the user



Latch keeps the user inside the ladder footprint

## SPECIFICATIONS

Model No.	Fits On	Platform Height	Max. Reach	Straight Ladder Height	Approx. Ladder Length	Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
AC63	All Podium Ladders	2'	8'	4'	58"	4.8" x 28" x 4.2"	6

## DIMENSIONS


Height	4' - 8"
Depth:	4.2"
Width	25"

\* Ladder sold separately

# PD6200SERIES Podium Ladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

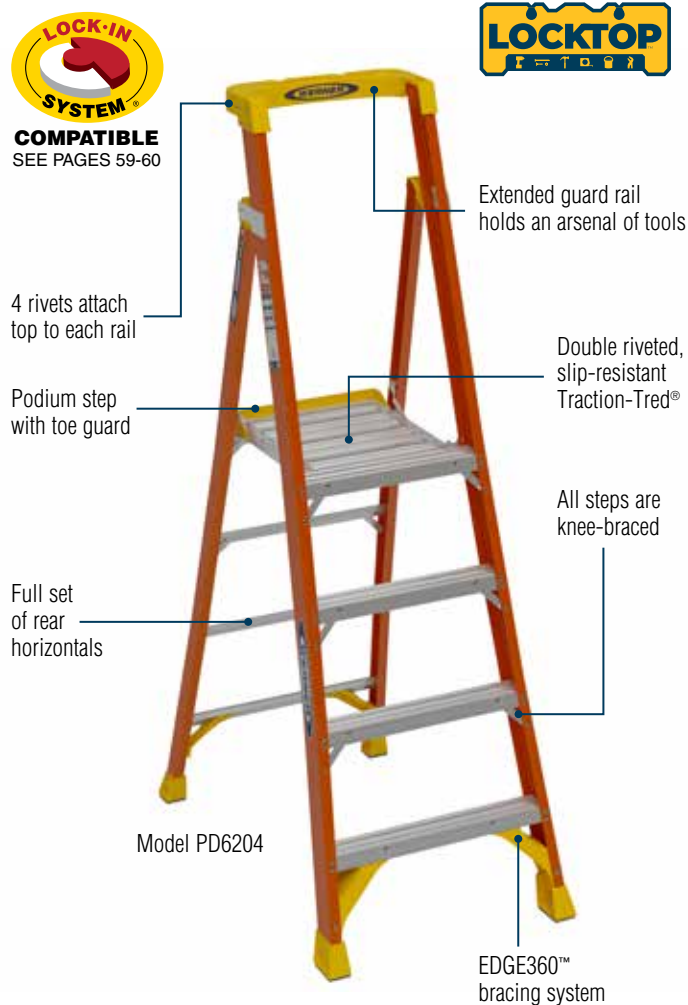

- Ideal for working at fixed heights
- Customize your ladder top with the Lock-In Accessory System
- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails
- Internal aluminum spreaders on 8' and 10' models

## SPECIFICATIONS

Model No.	Height (Size) to Platform	Max. Reach	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
PD6202	2'	8'	24"	31"	7.0	20.0
PD6203	3'	9'	26"	37"	9.2	21.0
PD6204	4'	10'	27-1/2"	43"	11.3	26.5
PD6205	5'	11'	29-1/4"	50"	13.8	32.5
PD6206	6'	12'	31"	56"	16.4	34.5
PD6207	7'	13'	33"	63"	19.4	38.0
PD6208	8'	14'	34-1/2"	68"	22.3	44.5
PD6210	10'	16'	38"	80"	29.1	55.5
PD6212	12'	18'	41-1/2"	93"	36.8	66.5


## DIMENSIONS

Platform:	16" x 19.5"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide

# PD6200-4CSERIES Podium Ladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

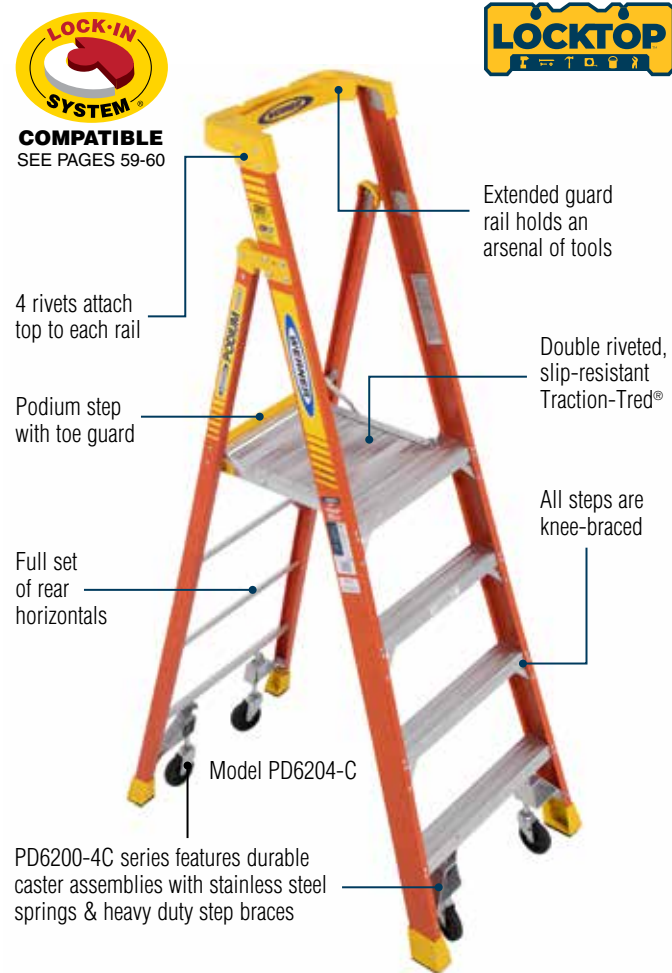

PD6200-4C series features durable caster assemblies with stainless steel springs & heavy duty step braces

- Ideal for working at fixed heights, easier to maneuver than scaffolds or lifts
- Customize your ladder top with the Lock-In Accessory System
- Every rivet backed up by metal plate or washer to protect rails
- Internal aluminum spreaders on 8' and 10' models

## SPECIFICATIONS

Model No.	Height (Size) to Platform	Max. Reach	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
PD6202-4C	2'	8'	24"	31"	7.0	28.0
PD6203-4C	3'	9'	26"	37"	9.2	28.3
PD6204-4C	4'	10'	27-1/2"	43"	11.3	33.8
PD6205-4C	5'	11'	29-1/4"	50"	13.8	41.0
PD6206-4C	6'	12'	31"	56"	16.4	42.5
PD6207-4C	7'	13'	33"	63"	19.4	47.0
PD6208-4C	8'	14'	34-1/2"	68"	22.3	51.8
PD6210-4C	10'	16'	38"	80"	29.1	62.8
PD6212-4C	12'	18'	41-1/2"	93"	36.8	74.5

## DIMENSIONS

Platform:	16" x 19.5"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide



# P7400SERIES Platform Stepladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING



- \* Energy Diffusing Geometry
- Every rivet backed up by metal plate or washer to protect rails
- Internal aluminum spreaders on 8' and 10' models

## SPECIFICATIONS NOTE: Type IAA duty rating is for platforms ranging in size from 3' to 8'

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
P7403	3'	5'	25-1/4"	35-7/8"	5.1	22.0
P7404	4'	6'	27"	42"	6.4	26.0
P7406	6'	8'	30-1/2"	54-3/8"	9.1	34.0
P7408	8'	10'	34"	66-5/8"	12.2	44.5

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

# P7400SERIES Platform Stepladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING



- \* Energy Diffusing Geometry
- Every rivet backed up by metal plate or washer to protect rails
- Internal aluminum spreaders on 8' and 10' models

## SPECIFICATIONS NOTE: Type IAA duty rating is for platforms ranging in size from 3' to 8'

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
P7410	10'	12'	37-1/2"	79"	15.6	54.5
P7412	12'	14'	42"	91-1/4"	19.3	68.5

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

## DIMENSIONS

Platform:	14-5/8" x 15"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide



P6200SERIES Platform Ladder

300lbs. LOAD CAPACITY

TYPE IA  
DUTY RATING



- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails
- Internal aluminum spreaders on 8' and 10' models

SPECIFICATIONS

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
P6202	2'	4'	23-3/8"	29-3/4"	4.2	17.0
P6204	4'	6'	26-7/8"	42"	7.2	24.0
P6206	6'	8'	30-3/8"	54-3/4"	10.9	32.0
P6208	8'	10'	33-7/8"	66-5/8"	15.2	44.5
P6210	10'	12'	37-3/8"	79"	20.1	55.0

DIMENSIONS

Platform:	14-5/8" x 15"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide



FIBERGLASS PODIUMS

FOR WORKING AROUND ELECTRICITY, NON-CONDUCTIVE SIDE RAILS.



# PT7400SERIES Stockr's Ladder®††

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING



- Easy to handle and folds to a 12" width for storage
- Unique combination of one person, two person†† and platform ladder use
- Internal Pinch-Proof™ aluminum spreaders on 8' and 10' models
- Requires less floor space than heavy steel rolling ladders

## SPECIFICATIONS

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
PT7404	4'	6'	25-1/4"	50"	8.4	31.5
PT7406	6'	8'	28-3/4"	64"	12.7	41.5
PT7408	6'	10'	32-1/4"	78-1/4"	17.8	54.5
PT7410	10'	12'	35-3/4"	92-1/4"	23.7	66.0

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.


## DIMENSIONS

Platform:	12-3/4" x 22"	Steps:	3" wide
Rails:	3-1/8" wide	Flange:	1-3/16" wide

# PT7400-4CSERIES Stockr's Ladder®††

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

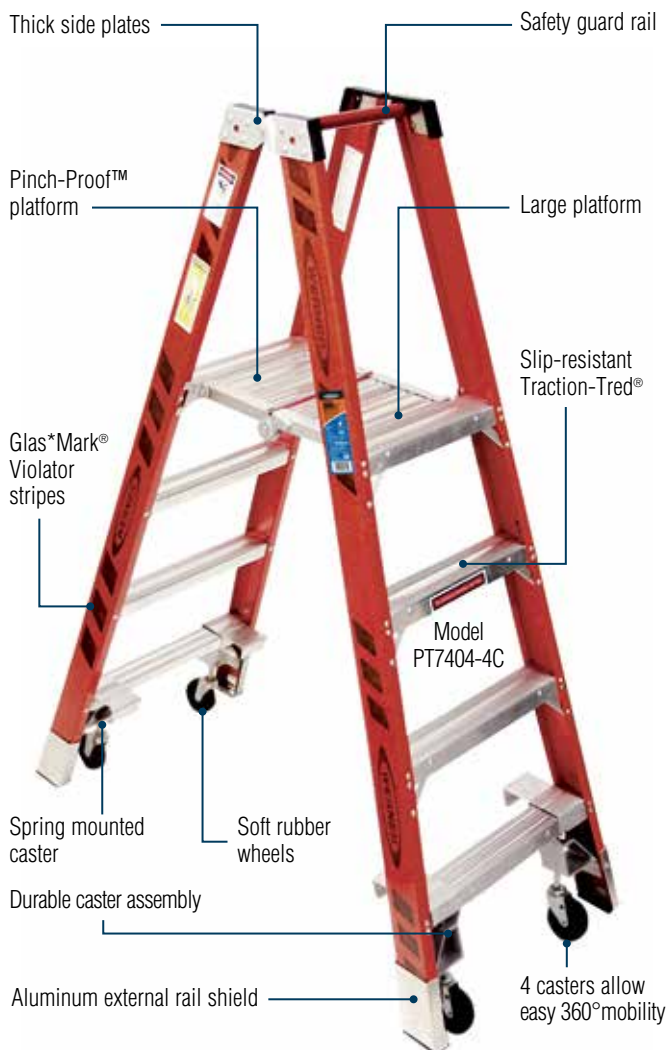

- Easy to handle and folds to a 12" width for storage
- Unique combination of one person, two person†† and platform ladder use
- Internal Pinch-Proof™ aluminum spreaders on 8' and 10' models
- Requires less floor space than heavy steel rolling ladders

## SPECIFICATIONS

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
PT7404-4C	4'	6'	25-1/4"	50"	8.4	37.0
PT7406-4C	6'	8'	28-3/4"	64"	12.7	53.0
PT7408-4C	6'	10'	32-1/4"	78-1/4"	17.8	60.5
PT7410-4C	10'	12'	35-3/4"	92-1/4"	23.7	72.5

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.


## DIMENSIONS

Platform:	12-3/4" x 22"	Steps:	3" wide
Rails:	3-1/8" wide	Flange:	1-3/16" wide

# E7400SERIES Extension Trestle Ladder††

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

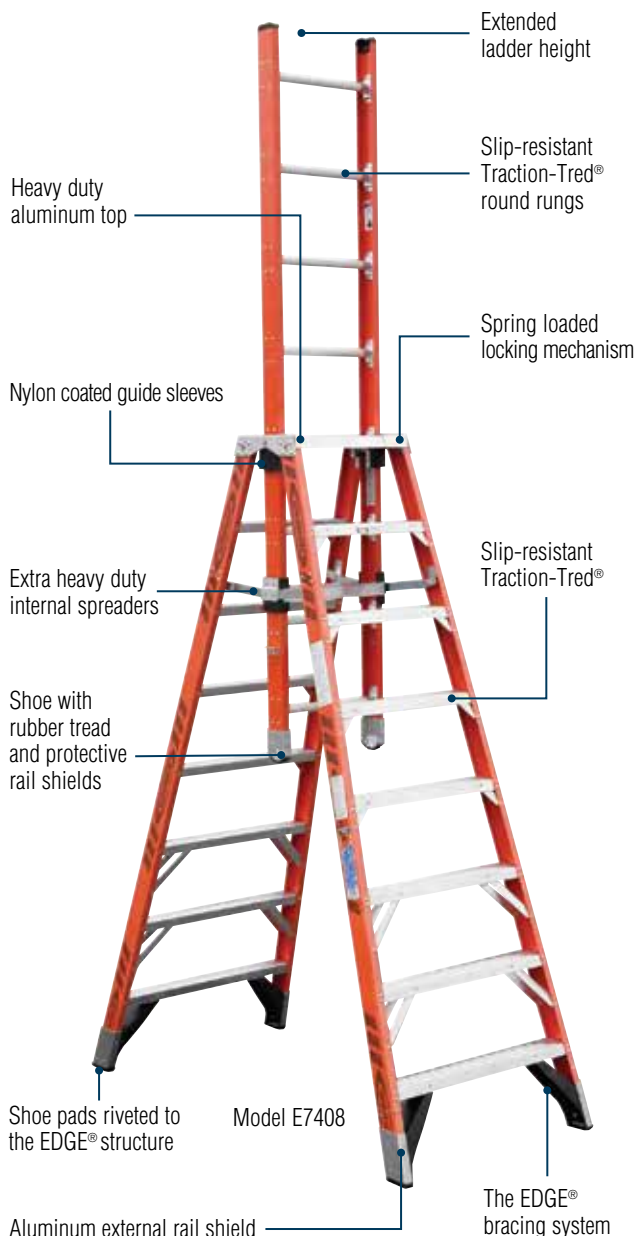

## SPECIFICATIONS

Model No.	Stepladder Size	Base Section Bottom Width	Approx. Spread	Approx. Extended Ladder Height	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
E7408	8'	32-3/4"	67-3/4"	12'	16.6	74.0
E7410	10'	36-1/4"	81-7/8"	15'	22.2	95.5
E7412	12'	39-3/4"	95-7/8"	19'	28.3	113.5
E7414	14'	43-1/4"	109-3/4"	22'	35.1	135.5
E7416	16'	46-3/4"	123-3/4"	26'	42.4	158.0

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

## DIMENSIONS

Extended Ladder		Stepladder	
Rails:	3-3/8" wide	Rails:	3-3/16" wide (8'-12') 3-5/16" wide (14'-16')
Rungs:	1-1/4"	Steps:	3" wide
Flange:	1-3/16" wide	Flange:	1-3/16" wide

# FTP6200SERIES Tripod Stepladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING



Single rear rail allows FTP Series to rest where other ladders can't



Convenient spreader handle design improves setup and transportability



Makes working in tight spaces easy

- Every rivet backed up by metal plate or washer to protect rails
- Internal aluminum spreaders on 8' and 10' models

## SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
FTP6204	4'	31"	30-1/2"	3.7	17.0
FTP6206	6'	36"	43-3/4"	6.8	23.0
FTP6208	8'	40"	57"	10.1	31.0
FTP6210	10'	51"	71"	17.6	42.0
FTP6212	12'	54"	77-3/4"	22.6	51.0

## DIMENSIONS

Top:	5-3/4" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rail:	1-1/2" square (4' to 8'), 2" square (10' and 12')
Flange:	1-3/16" wide		







# FMT SERIES MULTI-POSITION LADDER



## Features

- Non-conductive fiberglass rails
- Five positions: 1. Twin Step Ladder 2. Stairway Step Ladder 3. Extension ladder 4. 2-Scaffold bases 5. Wall Ladder
- Compact storage position is great for easily taking the ladder up stairs or on lifts
- Wide rungs for standing comfort
- Slip-resistant feet
- Adjustable telescoping design for maximum versatility
- Designed for both 1-person and 2-person jobs
- Size refers to the ANSI definition of length ANSI code: A14.2-2017 6.2.4
- Impact resistant hand grips
- Shatter-Proof J-Locks
- Base Width 28.07 inches, Base Spread 36.75 inches

## VERSATILE, COMPACT AND LIGHTWEIGHT LADDER



Maneuvers easily through jobsite



Scaffolding bases require no additional hinges\*



300lb load capacity per side


## 5 LADDERS IN ONE



Twin Step Ladder




Stairway Step Ladder

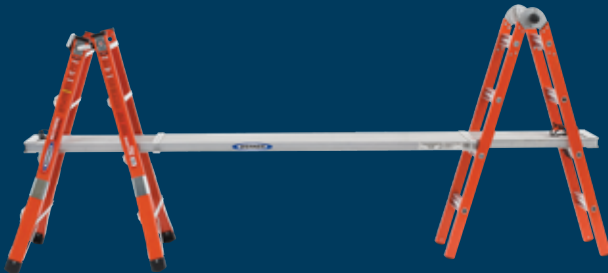

2-Scaffold Base



Wall Ladder

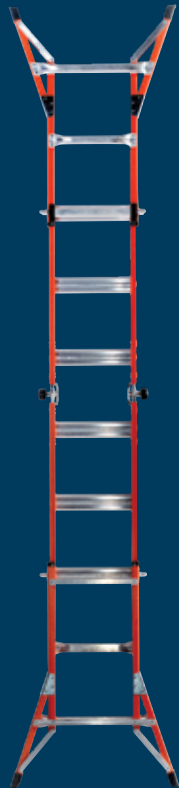

Extension Ladder



Scan for Product Info



## FMT SERIES Multi-Position Ladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING



Model FMT-22

### SPECIFICATIONS

Model No.	Stepladder Height (ft)	Stairway Height (ft)	Wall Height (ft)	Extension Height (ft)	Scaffold Height (ft)	Weight (lbs)
FMT-13	3 to 5	3 to 5	4 to 5	7 to 11	1.1 to 2	33.2
FMT-17	4 to 7	4 to 7	5 to 7	9 to 15	1.1 to 3	33.9
FMT-22	5 to 9	5 to 9	6 to 9	11 to 19	1.1 to 3	49.9


### DIMENSIONS

Rails:	2-5/8"	Rung:	1-1/8"
Flange:	1"	Steps/Rung:	1"



# EXTENSION LADDER SET-UP

## ALWAYS CHECK FOR THE CORRECT ANGLE

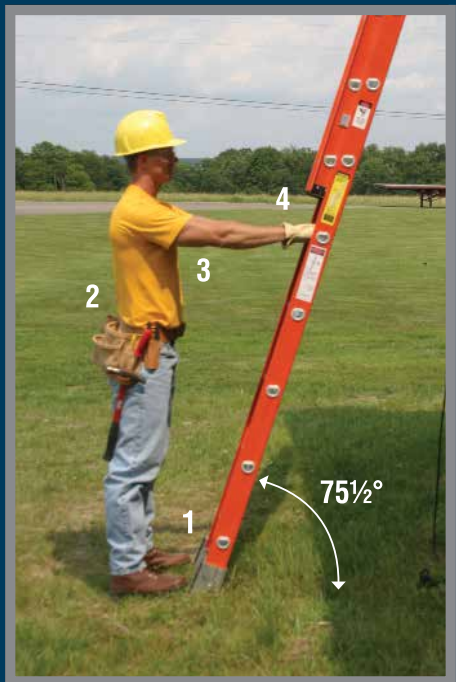


### To ensure that the ladder is at the correct angle:

1. Place your toes against the bottom of the ladder side rails.
2. Stand erect.
3. Extend your arms straight out.
4. The palms of your hands should touch the top of the rung at shoulder level.

**The four-to-one ladder length to set-back relationship creates the safest ladder use angle. Ladders placed either too close or too far may tip over at the top or slip out at the bottom.**

Place an extension ladder at a 75-1/2° angle. The set-back ("S") needs to be 1 foot away from the building for each 4 feet of length ("L") to the upper support point.

Ladder Length to Support Point "L"	Set-Back Between Support Point & Ladder Base "S"
12'	3'
16'	4'
20'	5'
24'	6'
28'	7'
32'	8'

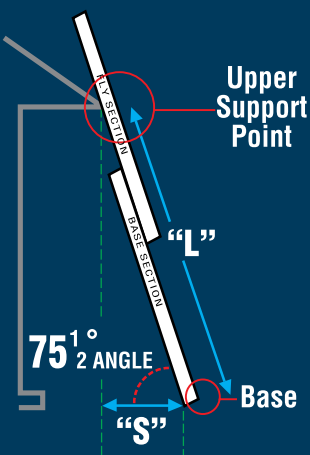

**\*NOTE:** For a quick estimate, count the rungs. They are spaced 12" apart.





## B7100-2 SERIES Tri-Rung Extension Ladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING

Non-Marring  
Traction Cap

Bubble  
Level

Wide Traction Tri-Rungs

High Visibility Green Rails

Extruded Rung Locks

BOXLOK™ Interlocking Rail System

Swivel Pick Feet

### LIGHTER TO CARRY. MORE COMFORTABLE TO CLIMB.

- High strength design with lightweight material
- Deep tri-rung and extra wide clear width
- Removable lightweight leveler & dual action feet for use on hard or penetrable surfaces

#### SPECIFICATIONS

Model No.	Ladder Height	Highest Standing Level	Reach Height †	Ladder Weight
B7116-2	16'	9' 5"	16'	31.3 lbs
B7120-2	20'	13' 3"	19' 10"	37.9 lbs
B7124-2	24'	17' 2"	23' 9"	43.6 lbs
B7128-2	28'	21'	27' 7"	50.1 lbs
B7132-2	32'	24' 10"	31' 5"	60.1 lbs

\*Less movement when compared to similar Werner 375 lbs ladders

† Assumes a 5ft 7in person with a vertical 12in reach

# AERO™

## LIGHTWEIGHT EXTENSION LADDER WITH BOXLOK™

**BOXLOK™**  
INTERLOCKING RAIL SYSTEM



### EXPERIENCE THE BOXLOK™ DIFFERENCE

Box Rail Design and  
Interlocking Technology

- Provides a rock solid feel you have to experience to believe, so you can focus safely on the job
- Achieves climbing stability and rigidity with less material weight, so it's more comfortable to carry


- The unique BOX RAIL design reduces deflection, twist, and sway for a more confident climbing experience
- Is exclusively from Werner – Trusted by pros for safety, reliability and durability

### LIGHTWEIGHT WITHOUT COMPROMISE



25% Lighter without  
reducing width or rigidity

### PATENTED BOXLOK™ SYSTEM



Innovative interlocking box  
rail design engineered to op-  
timize strength, rigidity and  
weight savings

### SOLID FEEL = MORE CONFIDENCE




Reduced deflection, twist,  
and sway combined with  
wide rungs provide premium  
climbing comfort



## D7100-2SERIES D-Rung Extension Ladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING

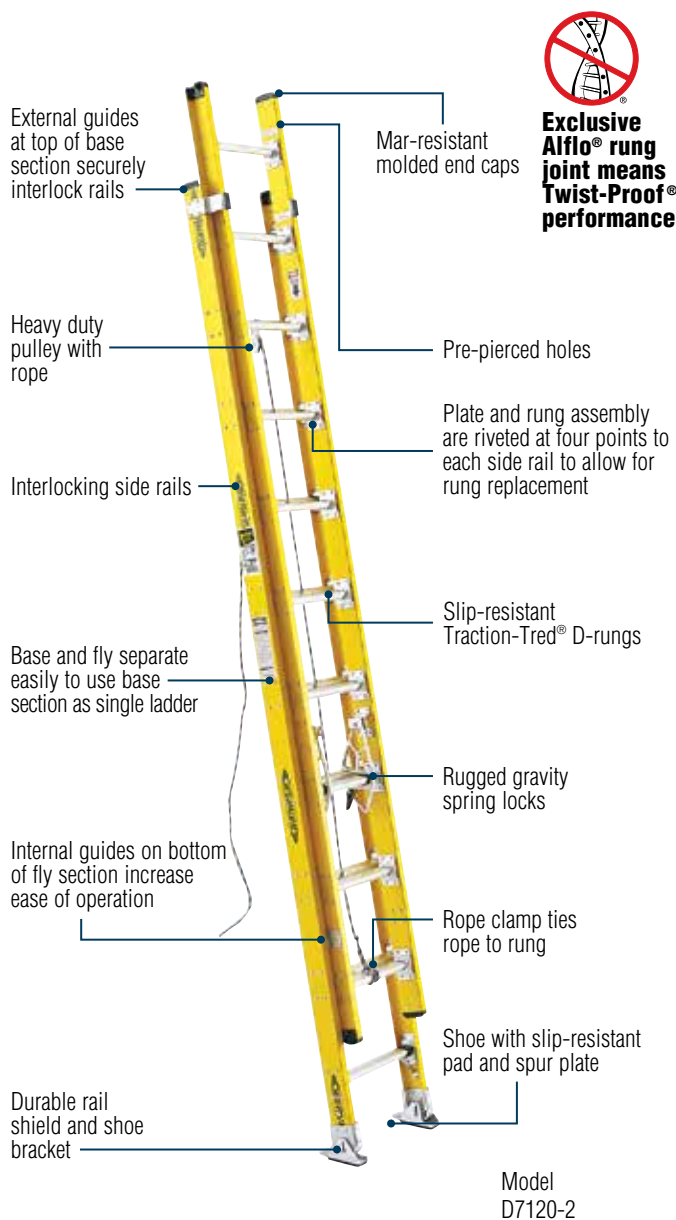

### SPECIFICATIONS

NOTE: Type IAA duty rating is for extension ladders up to 32 feet

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D7116-2†	16'	13'	7.0	41.0
D7120-2	20'	17'	8.7	50.0
D7124-2	24'	21'	10.3	58.5
D7128-2	28'	25'	12.0	67.0
D7132-2	32'	29'	13.7	82.5

† Note: D7116-2 is not equipped with rope and pulley


### DIMENSIONS

Rails:	Flange:	Rungs:	Fly Width:	Base Width:
16' to 32'	3-5/16"	1-3/16"	1-5/8"	16-1/8" outside rails
36' and 40'	4"	1-3/4"	1-3/4"	16-3/4" outside rails

## D7100-2SERIES D-Rung Extension Ladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

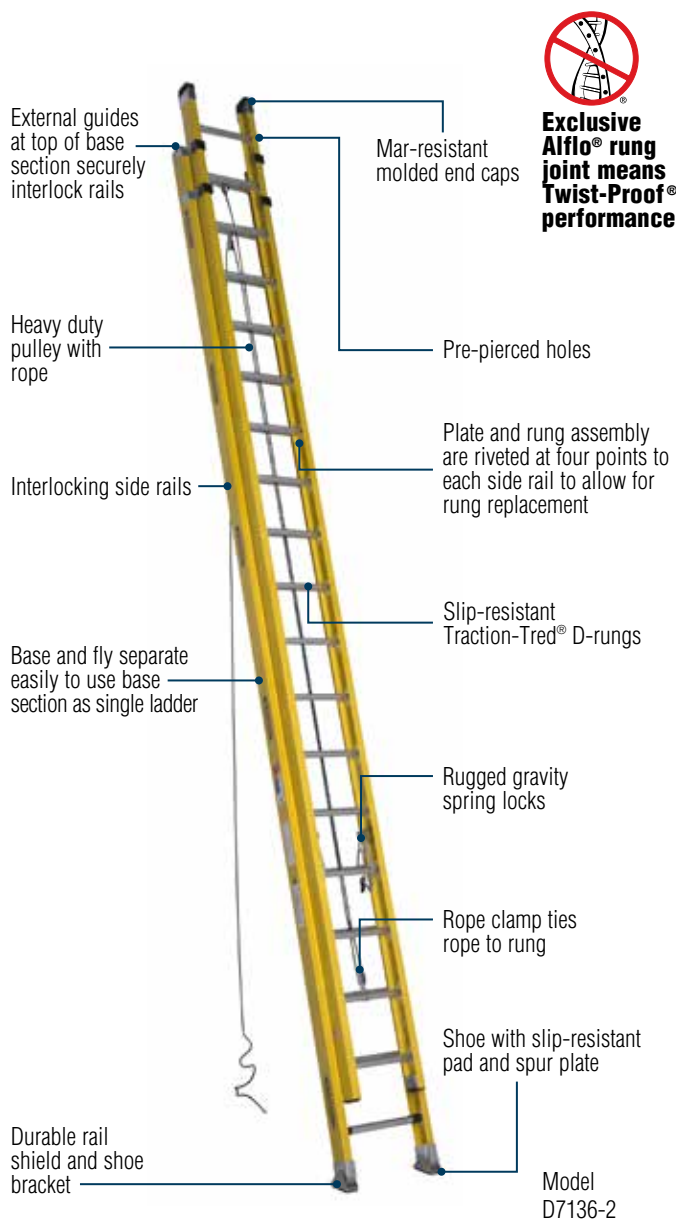

### SPECIFICATIONS

NOTE: Type IAA duty rating is for extension ladders up to 32 feet

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D7136-2	36'	32'	23.8	113.0
D7140-2	40'	35'	26.7	126.5

### DIMENSIONS

Rails:	Flange:	Rungs:	Fly Width:	Base Width:
16' to 32'	3-5/16"	1-3/16"	1-5/8"	16-1/8" outside rails
36' and 40'	4"	1-3/4"	1-3/4"	16-3/4" outside rails






## 7100-2SERIES Round Rung Extension

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING



**Exclusive Alflo® rung joint means Twist-Proof® performance**

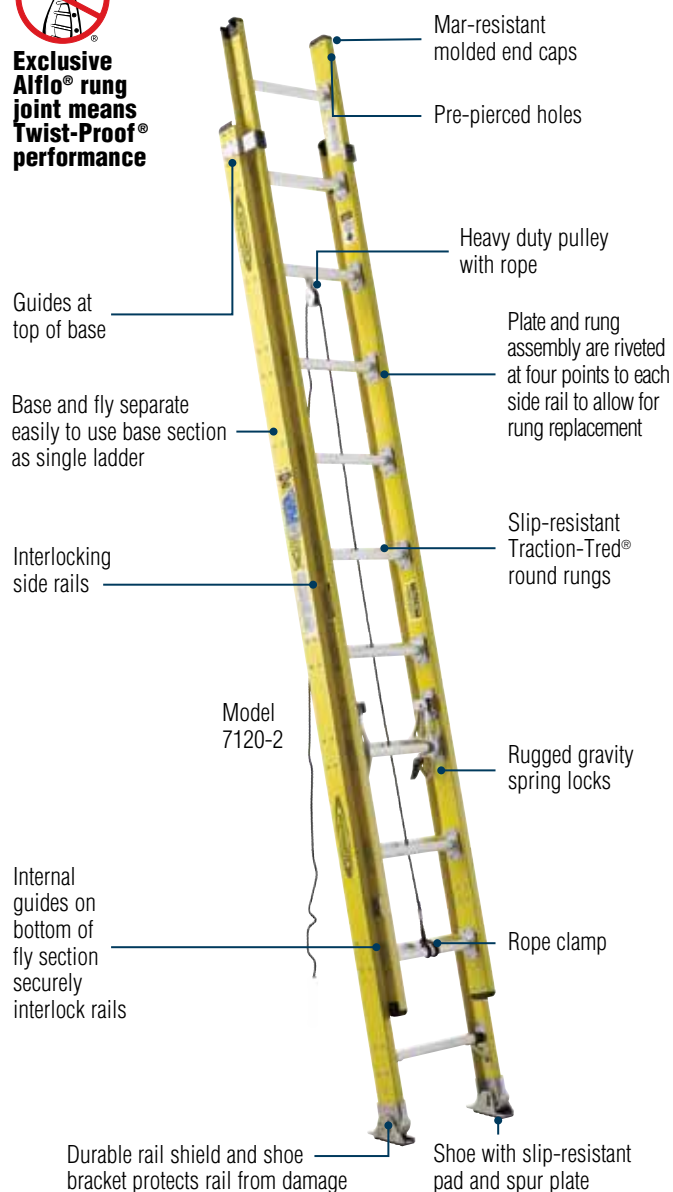

### SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
7116-2‡	16'	13'	7.0	38.5
7120-2‡	20'	17'	8.7	47.0
7124-2‡	24'	21'	10.3	55.0
7128-2‡	28'	25'	12.0	63.0
7132-2‡	32'	29'	13.7	78.0

‡ Note: 7116-2 is not equipped with rope and pulley

### DIMENSIONS

	Rails:	Flange:	Rungs:	Width (outside rails):	Width (outside shoes):
7100-2: ALL	1-3/16"	1-1/4"	17-3/4" outside rails	19" outside shoes	19" outside shoes


## 7100-1SERIES Straight Ladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING



**Exclusive Alflo® rung joint means Twist-Proof® performance**

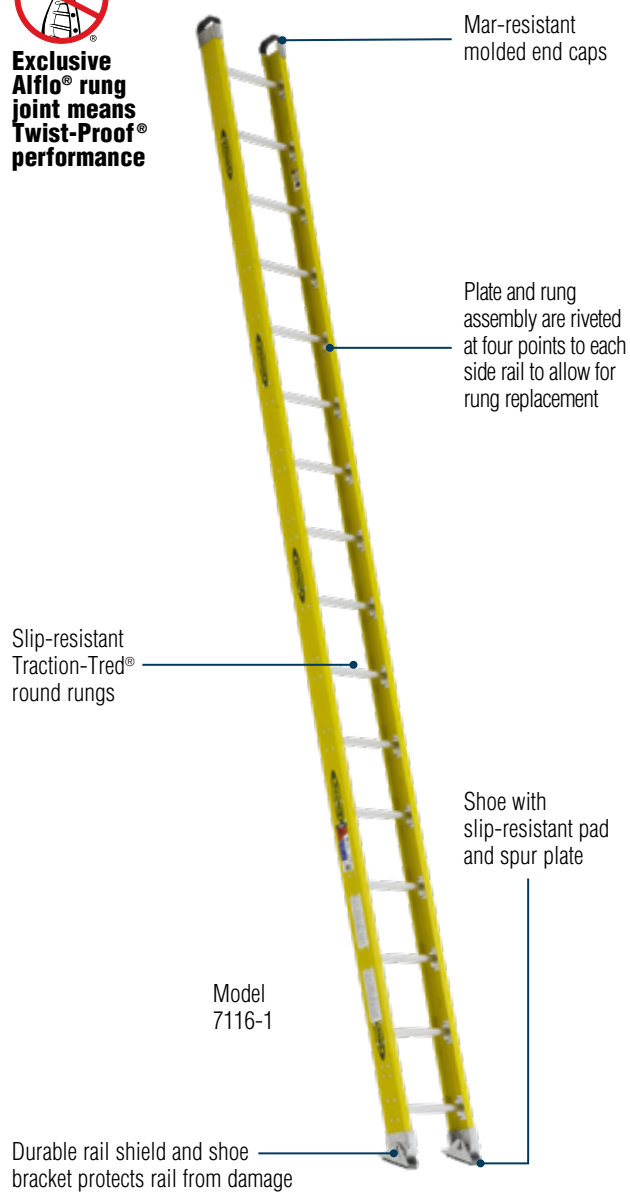

### SPECIFICATIONS

Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
7108-1	8'	4.5	20.0
7110-1	10'	5.5	24.0
7112-1	12'	6.5	28.0
7114-1	14'	7.6	32.0
7116-1	16'	8.6	40.0




## 7100-SERIES Straight Ladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

  
**Exclusive Alflo® rung joint means Twist-Proof® performance**

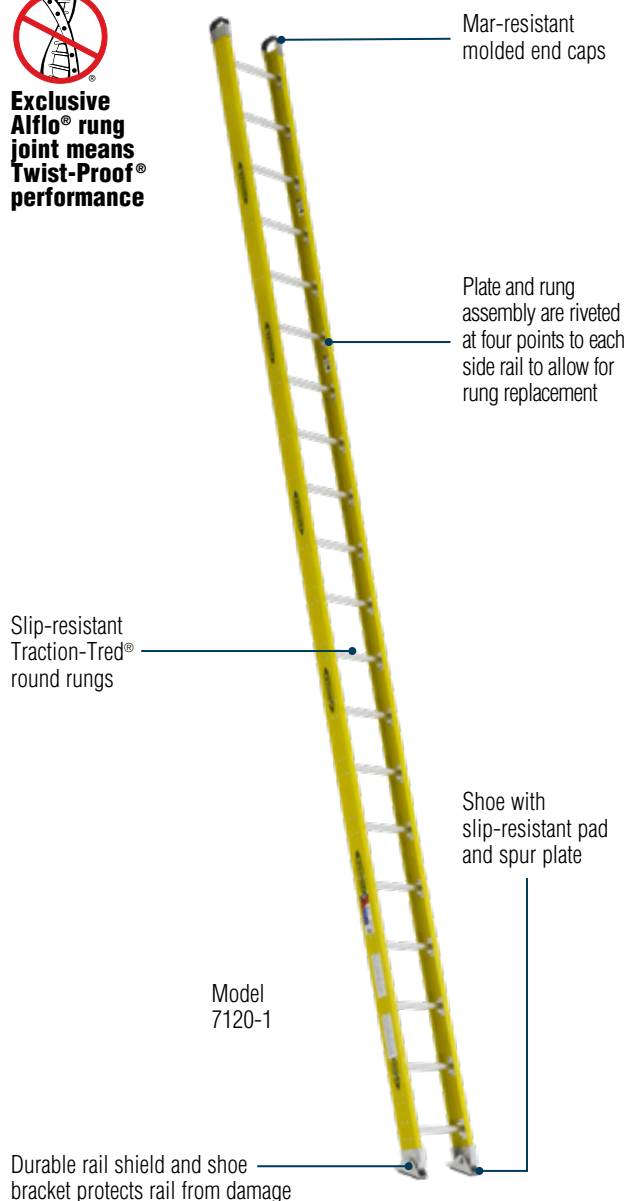

### SPECIFICATIONS

Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
7118-1	18'	12.5	52.0
7120-1	20'	13.9	58.0

### DIMENSIONS


	Rails:	Flange:
7100-1: 8' to 16'	1-3/16"	1-1/4"

## S7900SERIES Interchangeable Tapered Sectional Ladder

**375lbs.** LOAD CAPACITY **3 SECTIONS**

**TYPE IAA**  
DUTY RATING

  
**Exclusive Alflo® rung joint means Twist-Proof® performance**

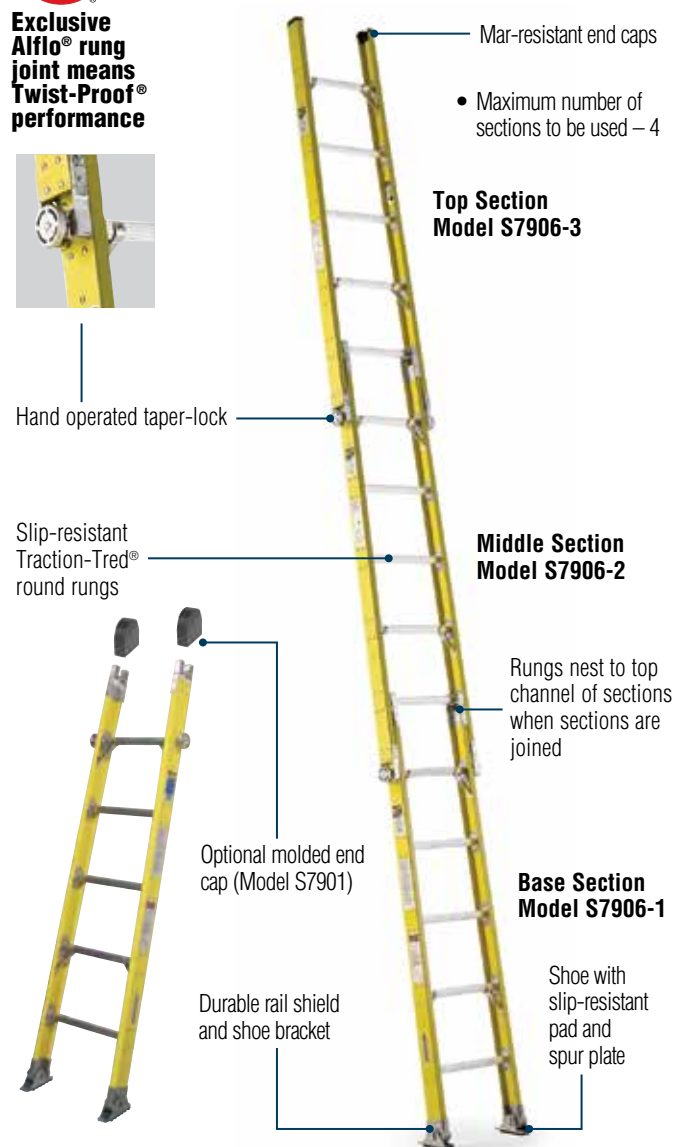

### SPECIFICATIONS

Model No.	Description	Top of Section	Bottom of Section	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
S7906-1	6' tapered base with swivel shoes	15-3/4"	19-3/4"	2.3	17.0
S7906-2	6' intermediate	15-3/4"	18-3/4"	3.5	15.5
S7906-3	6' top with molded end cap	16-3/16"	18-3/4"	3.4	13.0
S7901 (Accessory)	End cap for middle or base sections	N/A	N/A	0.1	1.0 ea.

### ASSEMBLY DESCRIPTION

Quantity of Sections	Model No.	Total Assembled Size
1	S7906-1 base	6' 2"
1	S7906-1 base	
1	S7906-2 middle	15' 11"
1	S7906-3 top	
1	S7906-1 base	
2	S7906-2 middle	20' 11"
1	S7906-3 top	

### DIMENSIONS


Rails:	3-5/16" wide
Flange:	1-3/16" wide
Rungs:	1-1/4" diameter



# M7100-SERIES Manhole Ladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING

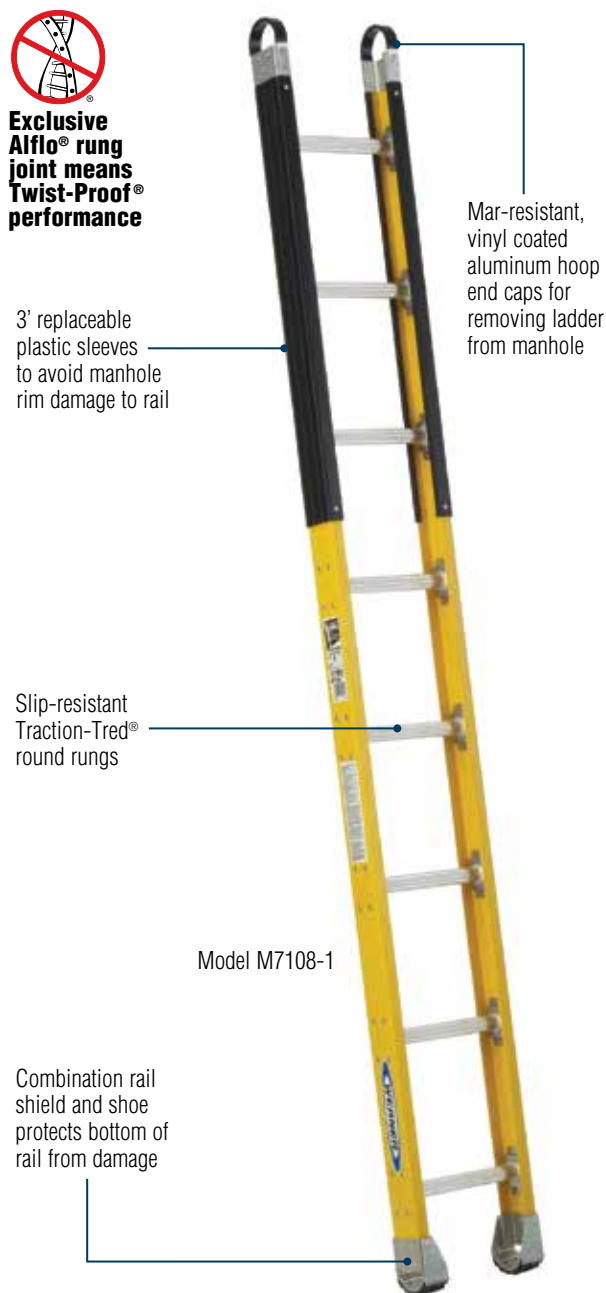

## SPECIFICATIONS

Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
M7108-1	8'	3.0	20.0
M7110-1	10'	3.7	24.0
M7112-1	12'	4.4	28.0
M7114-1	14'	5.2	32.0
M7116-1	16'	5.9	39.5
MW7110-1	10'	3.7	24.5
MW7112-1	12'	4.4	28.5
MW7114-1	14'	5.2	32.5
MW7116-1	16'	5.9	40.0


## DIMENSIONS

Rails:	3-5/16" wide	Rungs:	1-1/4"
Flange:	1-3/16" wide	Ladder Width:	12-3/8" outside shoes

# 7800SERIES Combination Step/Extension Ladder††

LOAD CAPACITY

**TYPE IAA**  
DUTY RATING

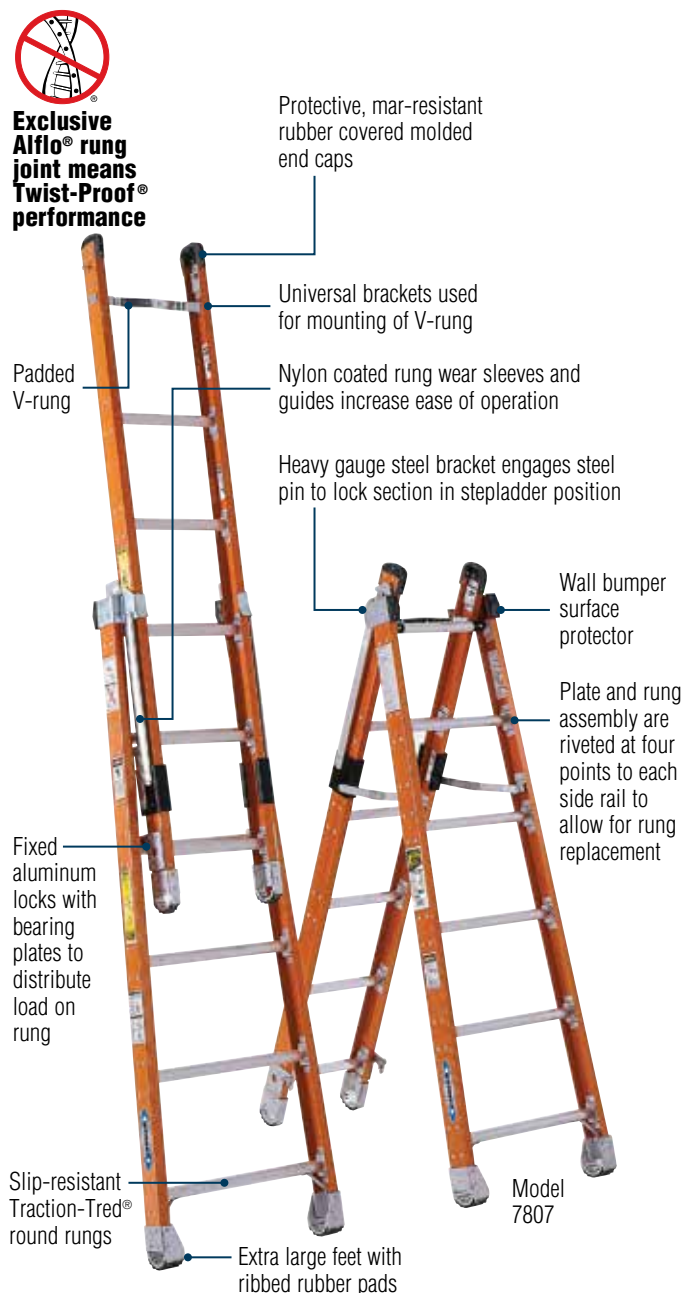

## SPECIFICATIONS

Model No.	Stepladder Size	Width at Flared Base (outside rails)	Spread to Outside of Shoes	Length of Ladder in Closed Position	Extended Ladder Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
7806	6'	23-1/4"	46-1/2"	72-3/4"	9-1/2'	8.6	33.5
7807	7'	24-1/4"	53-1/2"	84-3/4"	11-1/2'	10.3	37.0
7808	8'	25-1/4"	60-1/2"	96-3/4"	13-1/2'	12.1	40.5

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

## DIMENSIONS

	Parallel Section	Flared Section
Overlap	3'	—
Rails:	3-1/8" wide	3-1/8" wide
Flange:	1-3/16" wide	1-3/16" wide
Ladder Width:	14-1/2" outside rails	14-1/2" outside rails at top
Ladder in Closed Position:	—	7-7/8" deep



**D6200-2SERIES** Extension Ladder**300lbs.** LOAD CAPACITY**TYPE IA**  
DUTY RATINGMar-resistant  
molded end capsExternal guides at top  
of base section securely  
interlock rails.  
Two sets on 36' and  
40' modelsInterlocking  
side railsBase and fly separate easily  
to use base section as  
single ladderInternal guides on  
bottom of fly section  
securely interlock railsDurable rail shield bracket and  
shoe with Shu-Lok®, slip-resistant  
pad and spur plate**Exclusive  
Alflo® rung  
joint means  
Twist-Proof®  
performance**Pre-pierced holes for  
easy field installation of  
accessoriesHeavy duty  
pulley with ropeDirect rung to rail  
connections

Model D6220-2

**D6200-3SERIES** D-Rung Compact Extension Ladder**300lbs.** LOAD CAPACITY**TYPE IA**  
DUTY RATING**3 PIECE  
COMPACT  
DESIGN**Same reach as a standard  
extension ladder but stores  
in less space than comparable  
2 piece extension ladder**Exclusive  
Alflo® rung  
joint means  
Twist-Proof®  
performance**

Convenient to maneuver and store



Easy to transport on compact vehicles

Mar-resistant  
molded end capsSlip-resistant  
Traction-Tred®  
D-rungsInterlocking  
side railsRugged gravity  
spring locks  
operate smoothlyInternal guides on  
bottom of fly sectionDirect rung to  
rail connectionsDurable rail shield bracket  
and shoe with Shu-Lok®,  
slip-resistant pad and spur plate

Model D6216-3†

† Note: D6216-3 is not equipped with rope and pulley

**SPECIFICATIONS**

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Single Ladder Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D6216-2†	16'	13'	7.0	36.5	D6208-1	8'	4.7	19.5
D6220-2	20'	17'	8.7	44.5	D6210-1	10'	5.8	23.0
D6224-2	24'	21'	10.3	52.0	D6212-1	12'	6.9	27.0
D6228-2	28'	25'	12.0	59.5	D6214-1	14'	8.0	31.0
D6232-2	32'	29'	13.7	71.5	D6216-1	16'	9.1	37.0
D6236-2	36'	32'	15.3	80.5	--	--	--	--
D6240-2	40'	35'	17.0	88.5	D6220-1	20'	11.5	45.5

† Note: D6216-2 is not equipped with rope and pulley

**DIMENSIONS**

Rails:	3-5/16" wide	Fly Width:	16" outside rails
Flange:	1-3/16" wide	Base Width:	19" outside shoes
Rungs:	1-5/8"		

**SPECIFICATIONS**

Model No.	Total Length of Sections	Total Length in Storage Position 2 vs. 3 piece*	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D6216-3	18'	8' / 6'	13'	8.5	40.5
D6220-3	23'	10' / 8'	17'	11.1	54.0
D6224-3	27'	12' / 9'	21'	12.4	61.0
D6228-3	31'	14' / 11'	26'	15.0	74.5
D6232-3	35'	16' / 12'	29'	13.7	81.0

\* Total Length of ladder in storage position, comparison of Standard 2 - piece vs. New 3 - piece extension ladder.

**DIMENSIONS**


Rails:	3-5/16" wide	Fly Width:	16" outside rails
Flange:	1-3/16" wide	Base Width:	19" outside shoes
Rungs:	1-5/8"		



## T6200-2GSSERIES Extension Ladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

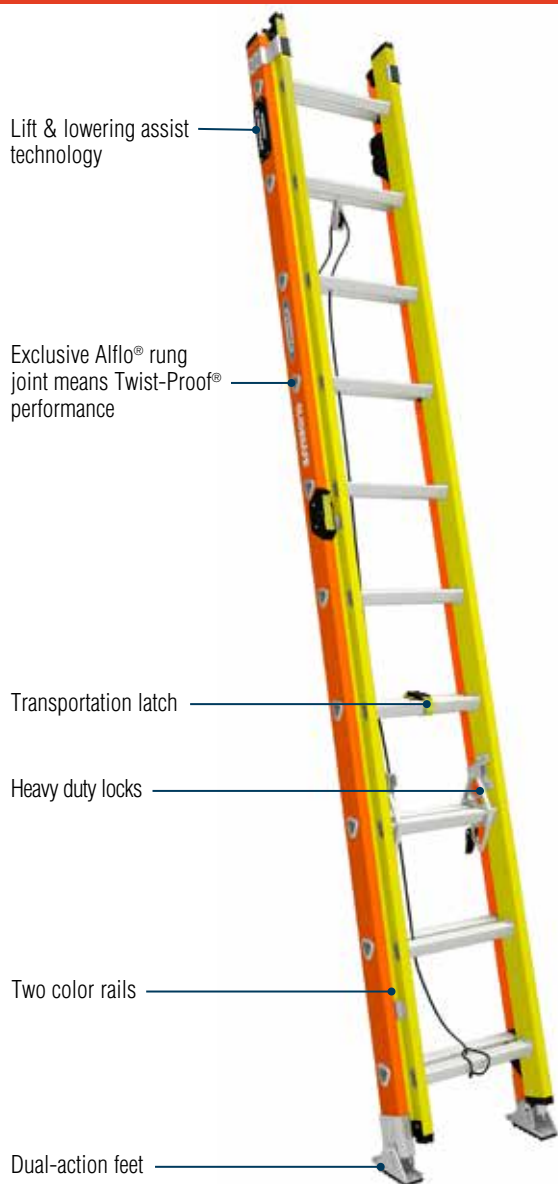

- Lift-assist technology makes it easier to extend with up to 50% less force†, eliminating back and arm strain
- Built in lowering assist technology guarantees a smooth closing, preventing slamming and rope burns
- The dual-locking system ensures the ladder won't extend while on the go, providing peace of mind

### SPECIFICATIONS

Model No.	Ladder Size	Ladder Length	Reach Height †	Ladder Weight	Rung Type	Shipping Length	Shipping Width	Shipping Height
T6220-2GS	20'	17'	19'	44.5 lbs	Tri-Rung	120"	19"	6.9"
T6224-2GS	24'	21'	23'	52.0 lbs	Tri-Rung	144"	19"	6.9"
T6228-2GS	28'	25'	27'	59.5 lbs	Tri-Rung	168"	19"	6.9"
T6232-2GS	32'	29'	31'	71.5 lbs	Tri-Rung	192"	19"	6.9"
T6236-2GS	36'	32'	34'	84.5 lbs	Tri-Rung	216"	19"	6.9"
T6240-2GS	40'	35'	37'	92.5 lbs	Tri-Rung	240"	19"	6.9"

† Percentage of assist can vary by ladder size, friction between siderails and variation on lift assist technology, compared to Werner D6200 300lbs fiberglass extension ladders


‡ Assumes a 5ft 7in person with a vertical 12in reach

# GLIDESAFE™

## EASY OPERATING EXTENSION LADDER



**EASY OPERATING  
EXTENSION LADDER**



**BUILT IN  
LOWERING ASSIST**



**DUAL LOCKING  
SYSTEM**



**FIBERGLASS** EASY OPERATING EXTENSION LADDER FOR WORKING AROUND ELECTRICITY. NON-CONDUCTIVE SIDE RAILS.






# D6000-2SERIES D-Rung Extension Ladder

**250lbs.** LOAD CAPACITY

**TYPE I**  
DUTY RATING



**Exclusive Alflo® rung joint means Twist-Proof® performance**

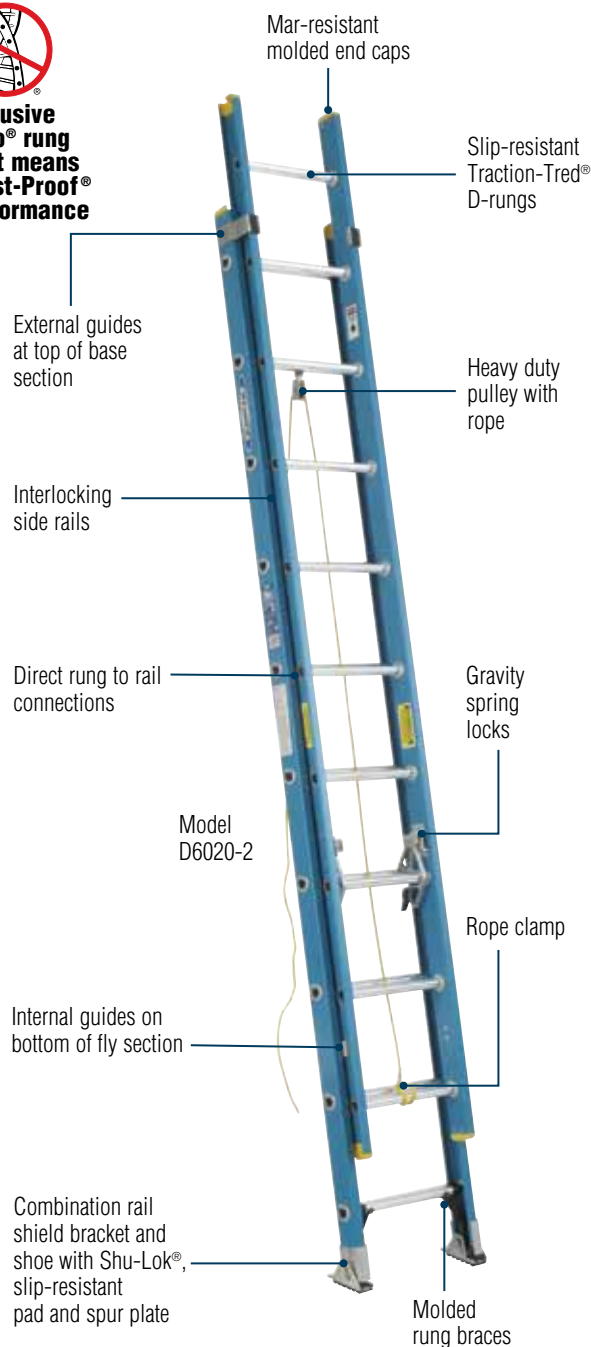

®The blue and yellow ladder is an exclusive registered trademark of Werner Co.

## SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D6016-2†	16'	13'	7.0	32.5
D6020-2	20'	17'	8.7	39.0
D6024-2	24'	21'	10.3	46.0
D6028-2	28'	25'	12.0	55.5

† Note: D6016-2 is not equipped with rope and pulley

## DIMENSIONS

Rails:	3-3/8" wide	Fly Width:	15-3/4" outside rails
Flange:	1-3/16" wide	Base Width:	18-1/8" outside shoes
Rungs:	1-1/2"		



# D5900-2SERIES D-Rung Extension Ladder

**225lbs.** LOAD CAPACITY

**TYPE II**  
DUTY RATING



**Exclusive Alflo® rung joint means Twist-Proof® performance**

Mar-resistant molded end caps

Smooth operating pulley

Climb and carry rail shape improves ergonomics and comfort for user

Slip-resistant Traction-Tred® D-rungs



Direct rung to rail connections

Interlocking side rails

Gravity spring locks

New internal rail guides

Rope clamp

Molded rung braces

Combination rail shield bracket and shoe with Shu-Lok® and slip-resistant pad

Model D5920-2

## SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D5916-2‡	16'	13'	5.9	27.0
D5920-2	20'	17'	7.4	33.0
D5924-2	24'	21'	8.9	39.0

‡ Note: D5916-2 is not equipped with rope and pulley

## DIMENSIONS

Rails:	3-5/16" wide	Fly Width:	15-1/8" outside rails
Flange:	1-3/16" wide	Base Width:	17-3/4" outside shoes
Rungs:	1-1/2"		




**FIBERGLASS** EXTENSION LADDERS

FOR WORKING AROUND ELECTRICITY. NON-CONDUCTIVE SIDE RAILS.





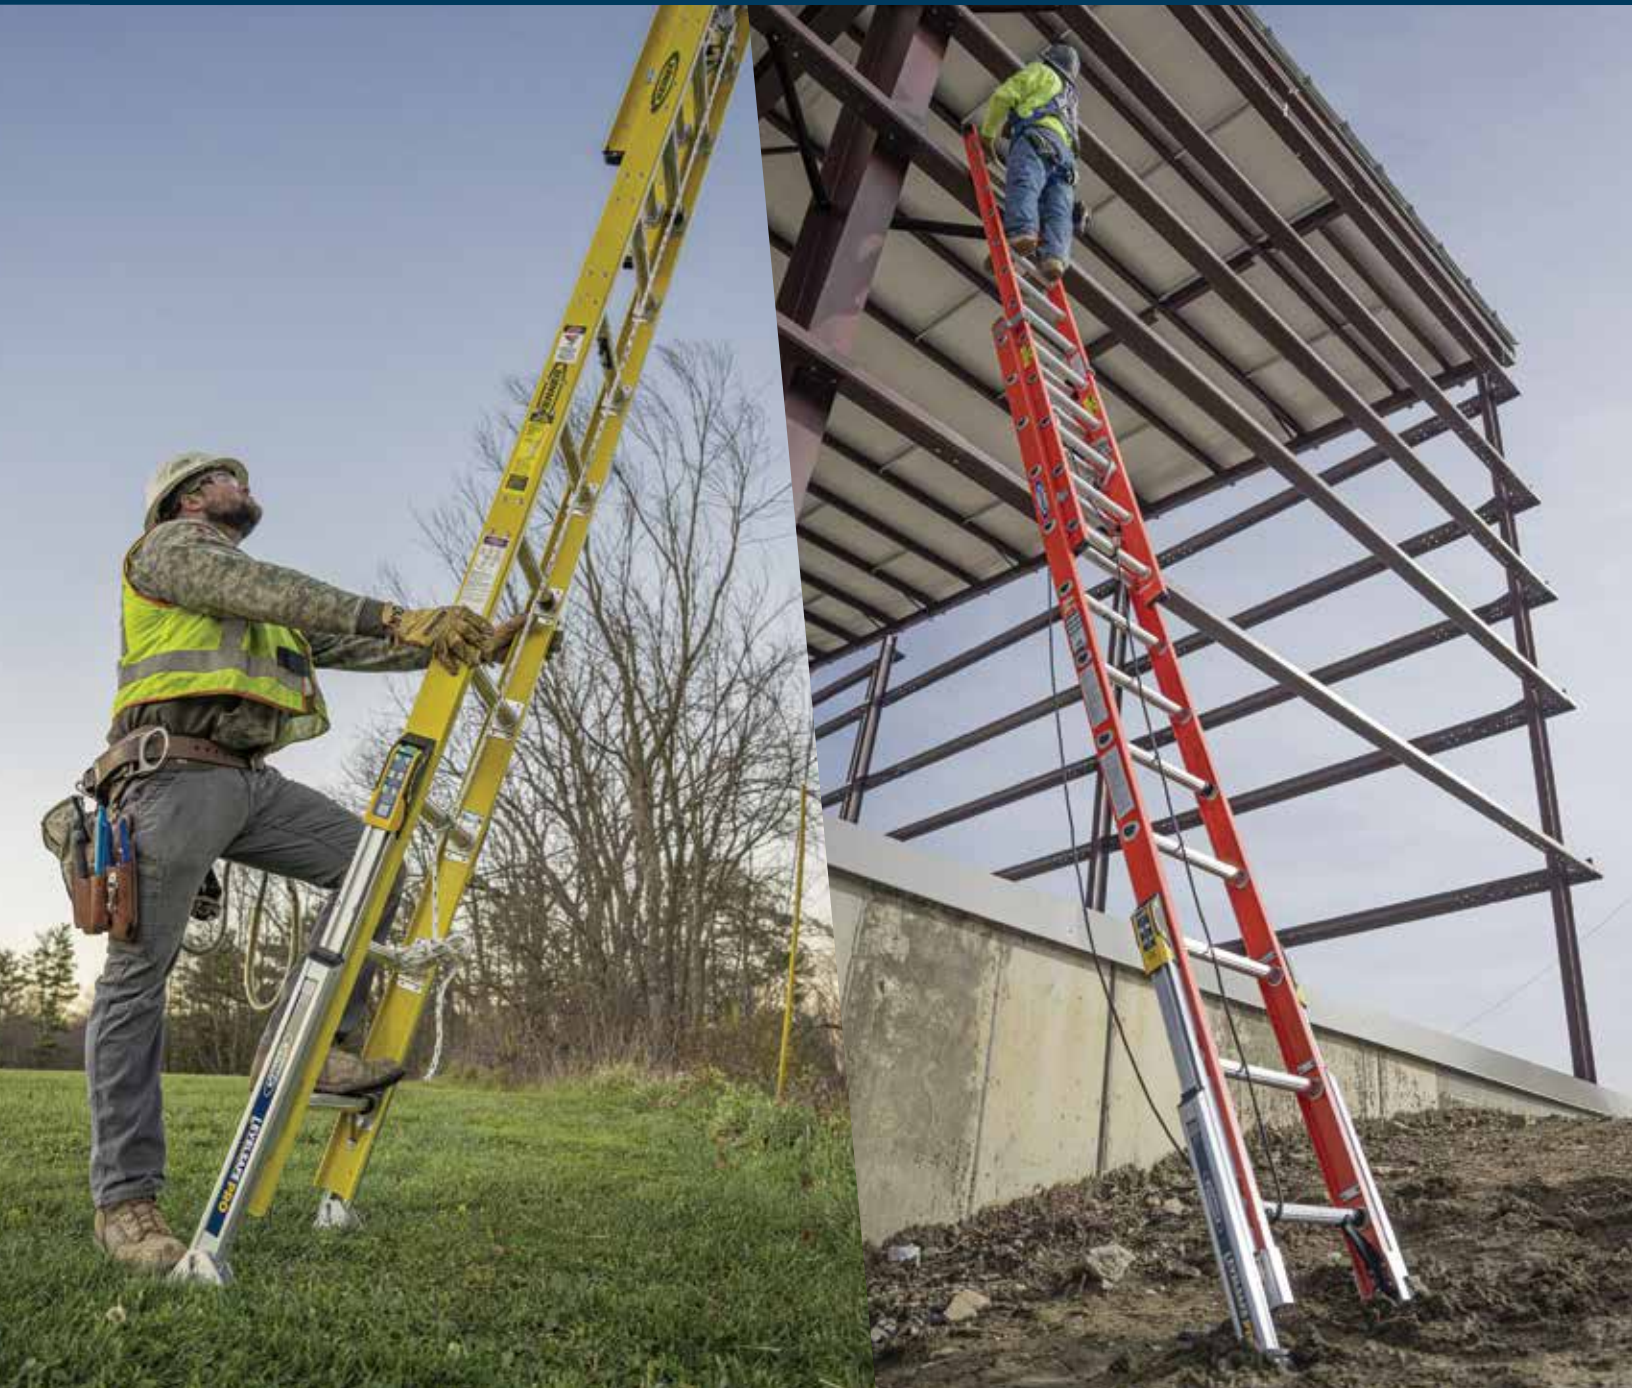

## LEVEL YOUR LADDER WITH PRECISION & CONVENIENCE



Automatic Leveling




Micro-Adjust Technology



Factory Installed on Select Pro Ladders



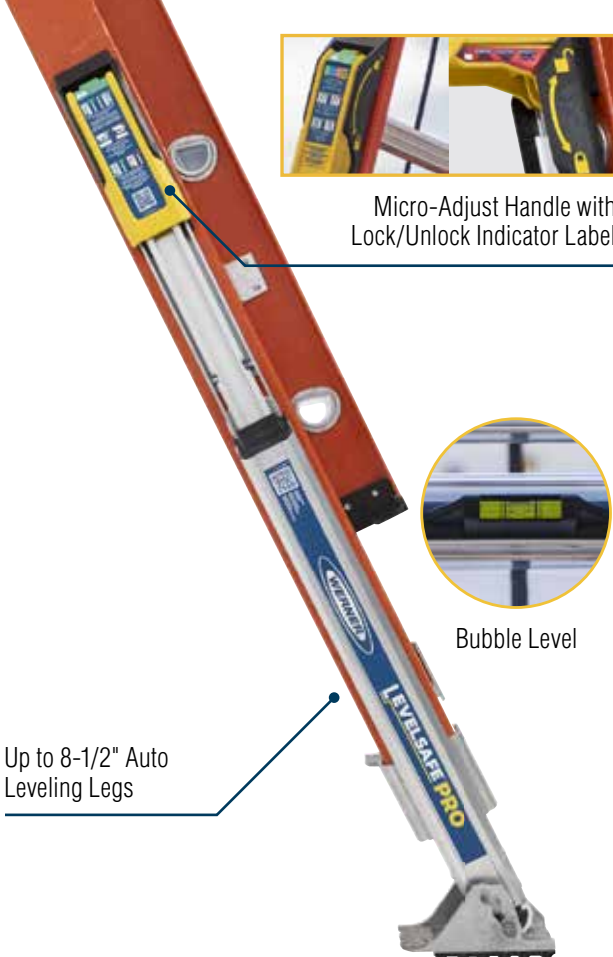

## Features

- Place ladder on uneven surfaces to smoothly and automatically find ladder level up to 8.5"
- Engage/disengage micro-adjust technology with 90° rotation of handles
- Built-in indicators show when ladder is locked & ready to climb
- Easy to control with no need to pick up the ladder to adjust level

## FACTORY INSTALLED ON SELECT PRO SERIES



## SPECIFICATIONS

LADDER HEIGHT			16 FT	20 FT	24 FT	28 FT	32 FT	40 FT
SERIES	DUTY RATING	MATERIAL	WERNER MODEL NO.					
B7100	375lb Type IAA	Fiberglass	—	B7120-2L	B7124-2L	B7128-2L	B7132-2L	—
D7100	375lb Type IAA	Fiberglass	D7116-2L	D7120-2L	D7124-2L	D7128-2L	D7132-2L	—
D6200	300lb Type IA	Fiberglass	D6216-2L	D6220-2L	D6224-2L	D6228-2L	D6232-2L	—
D1300	250lb Type I	Aluminum	—	D1320-2L	D1324-2L	D1328-2L	D1332-2L	D1340-2L

Additional LevelSafe™ Pro Factory Installed Models with V-Rung, Cable Hook or Strand Grab are Available

Retrofit Select Werner Extensions with LevelSafe™ Pro Accessory Kit (PK100), including models: D1200-2, D1300-2, D500-2, D5900-2/FE2000-2, D6000-2/FE1000-2, D6200-2, D6200-3, T6200-2GS, D7100-2, & 7100-2




▶ Scan Here to Learn More

See page 70 for information on the LEVELSAFE™ PRO Accessory Kit (PK100) to retrofit existing Werner extension ladders.



## V-RUNG



Slip-resistant rubber grip attached to steel v-rung for wood, metal or concrete poles.

## CABLE GRAB / V-RUNG



Lightweight but heavy duty, cable hooks rated for 375 lbs service. Stow away when not in use

Slip resistant rubberized V-Rung works with poles up to 10" in diameter

## STRAND GRAB / V-RUNG



Lightweight but heavy duty, Strand Grab Rated for 375 lbs service. Stow away when not in use

Independent gate arms sense pressure and close to grip the strand improving climber confidence

Slip resistant rubberized hook, gate, and v-rung works with poles up to 10" in diameter

## AUTOMATIC LEVELER



### LEVEL YOUR LADDER WITH PRECISION & CONVENIENCE

Place ladder on uneven surfaces & leveler adjusts to find level

Easy ladder control and leveling precision for a safe, stable ascension

### EASY TO INSTALL, CONTROL & LEVEL

- Easy Installation
- Automatic Leveling
- Micro-Adjust Technology





# FACTORY INSTALLED EXTENSION LADDER ACCESSORIES

**B7100**



**D7100**



**D6200**



**D1300**



LADDER HEIGHT	16'	20'	24'	28'	32'
<b>V-RUNG</b>					
D7100 Series	D7116-2V	D7120-2V	D7124-2V	D7128-2V	D7132-2V
D6200 Series	D6216-2V	D6220-2V	D6224-2V	D6228-2V	D6232-2V
<b>CABLE HOOK / V-RUNG</b>					
D7100 Series	D7116-2C	D7120-2C	D7124-2C	D7128-2C	D7132-2C
B7100 Series	-	B7120-2C	B7124-2C	B7128-2C	B7132-2C
D6200 Series	D6216-2C	D6220-2C	D6224-2C	D6228-2C	D6232-2C
D1300 Series	-	D1320-2C	D1324-2C	D1328-2C	D1332-2C
<b>STRAND GRAB</b>					
B7100 Series	-	B7120-2S	B7124-2S	B7128-2S	B7132-2S
<b>WERNER LEVELSAFE™ PRO LEVELER</b>					
D7100 Series	D7116-2L	D7120-2L	D7124-2L	D7128-2L	D7132-2L
B7100 Series	-	B7120-2L	B7124-2L	B7128-2L	B7132-2L
D6200 Series	D6216-2L	D6220-2L	D6224-2L	D6228-2L	D6232-2L
D1300 Series	-	D1320-2L	D1324-2L	D1328-2L	D1332-2L
<b>V-RUNG &amp; WERNER LEVELSAFE™ PRO LEVELER</b>					
D7100 Series	D7116-2VL	D7120-2VL	D7124-2VL	D7128-2VL	D7132-2VL
D6200 Series	D6216-2VL	D6220-2VL	D6224-2VL	D6228-2VL	D6232-2VL
<b>CABLE HOOK, V-RUNG, &amp; WERNER LEVELSAFE™ PRO LEVELER</b>					
D7100 Series	D7116-2CL	D7120-2CL	D7124-2CL	D7128-2CL	D7132-2CL
B7100 Series	-	B7120-2CL	B7124-2CL	B7128-2CL	B7132-2CL
D6200 Series	D6216-2CL	D6220-2CL	D6224-2CL	D6228-2CL	D6232-2CL
<b>STRAND GRAB &amp; WERNER LEVELSAFE™ PRO LEVELER</b>					
B7100 Series	-	B7120-2SL	B7124-2SL	B7128-2SL	B7132-2SL

**400SERIES** Stepladder**375lbs.** LOAD CAPACITY**TYPE IAA**  
DUTY RATING


- Optional black molded pail shelf kit, model no. PK76-3

**SPECIFICATIONS**

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
404	4'	21-1/4"	30-1/8"	4.8	16.0
406	6'	24-3/4"	42-7/16"	8.1	24.0
408	8'	28-1/4"	54-3/4"	12.2	33.5
410	10'	31-3/4"	67"	17.0	43.5
412	12'	35-1/4"	79-3/8"	22.5	54.5

**DIMENSIONS**

Top:	7" x 14"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-1/8" wide	Rear Flange:	1" wide

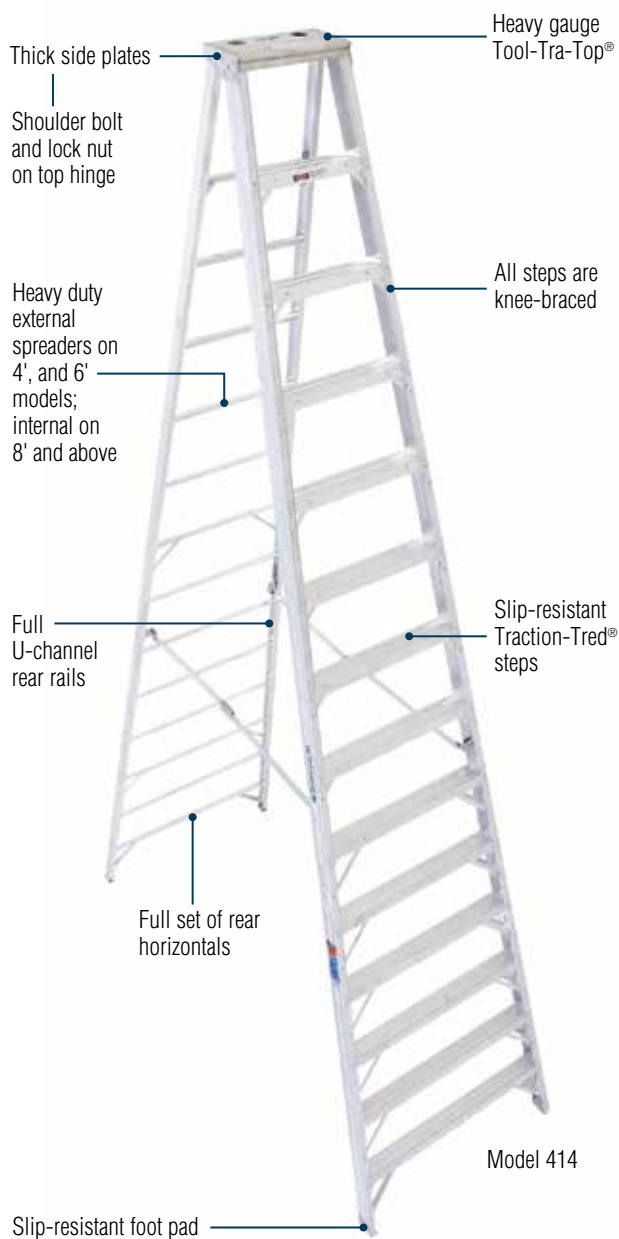**400SERIES** Stepladder**300lbs.** LOAD CAPACITY**TYPE IA**  
DUTY RATING

- Optional black molded pail shelf kit, model no. PK76-3


**SPECIFICATIONS**

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
414	14'	38-5/8"	91-11/16"	28.2	65.0
416	16'	42-1/8"	104"	34.7	77.5

**DIMENSIONS**

Top:	7" x 14"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-1/8" wide	Rear Flange:	1" wide

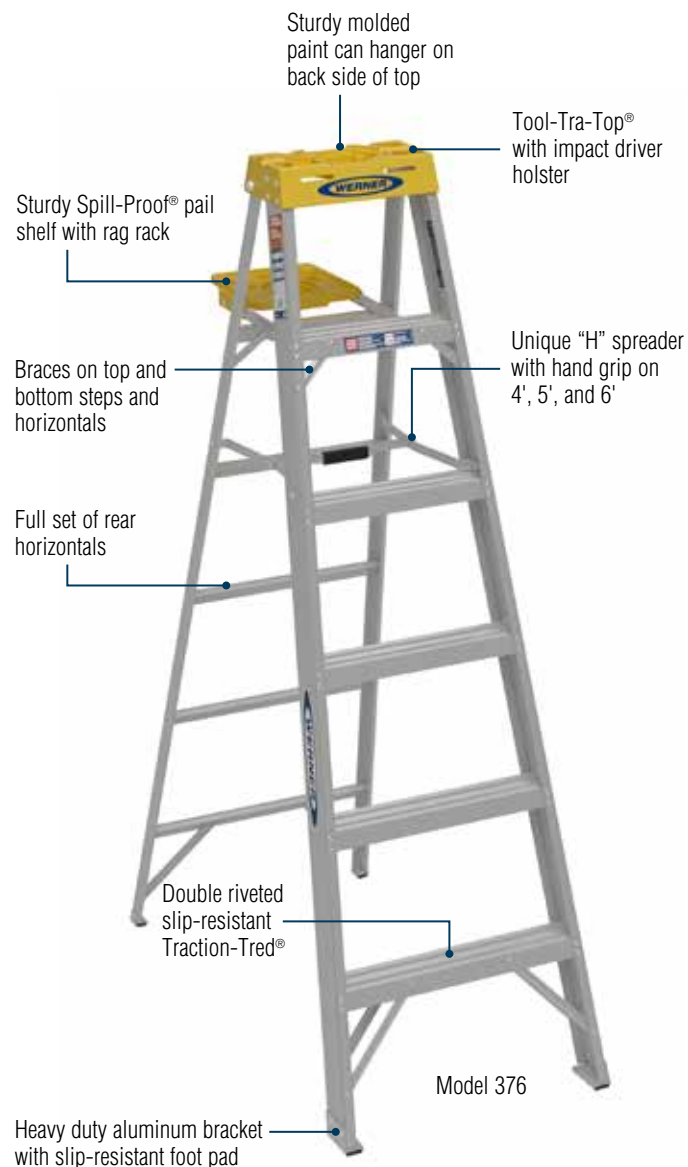

**T400SERIES** Multi-Use Twin Stepladder®††**375lbs.** LOAD CAPACITY**TYPE IAA**  
DUTY RATING**370SERIES** Stepladder**300lbs.** LOAD CAPACITY**TYPE IA**  
DUTY RATING**SPECIFICATIONS**

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T404	4'	21-1/4"	36-1/4"	5.0	21.5
T406	6'	24-3/4"	50-1/4"	8.8	31.0
T408	8'	28-1/4"	64-1/4"	13.3	42.0
T410	10'	31-3/4"	78-1/4"	18.7	55.0
T412	12'	35-1/4"	92-1/4"	25.0	69.0

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

**DIMENSIONS**

Top:	8-1/4" x 14"	Steps:	3" wide
Rails:	3-1/8" wide	Flange:	1-1/8" wide

**SPECIFICATIONS**

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
373	3'	17-3/4"	23-3/8"	1.5	9.0
374	4'	19-1/2"	29-1/2"	2.1	11.0
375	5'	21-1/4"	35-3/4"	2.8	13.5
376	6'	23"	41-7/8"	3.5	15.5
378	8'	26-1/2"	54-1/4"	5.1	22.5
310	10'	30"	66-1/2"	7.0	31.0

**DIMENSIONS**

Top:	5-1/8" x 12-1/8"	Steps:	3" wide
Front Rails:	3" wide	Rear Rails:	1-1/4" wide
Front Flange:	7/8" wide	Rear Flange:	1" wide





**T370SERIES** Multi-Use Twin Stepladder††**300lbs.** LOAD CAPACITY**TYPE IA**  
DUTY RATING

- External Pinch-Proof™ spreaders on 4' model


**SPECIFICATIONS**

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T374	4'	21-1/4"	36"	3.5	14.5
T376	6'	24-3/4"	50"	5.7	21.5
T378	8'	28-1/4"	64"	8.2	31.0
T310	10'	31-3/4"	78"	11.1	43.0

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

**DIMENSIONS**


Top:	8-1/4" x 14"	Steps:	3" wide
Rails:	3" wide	Flange:	7/8" wide

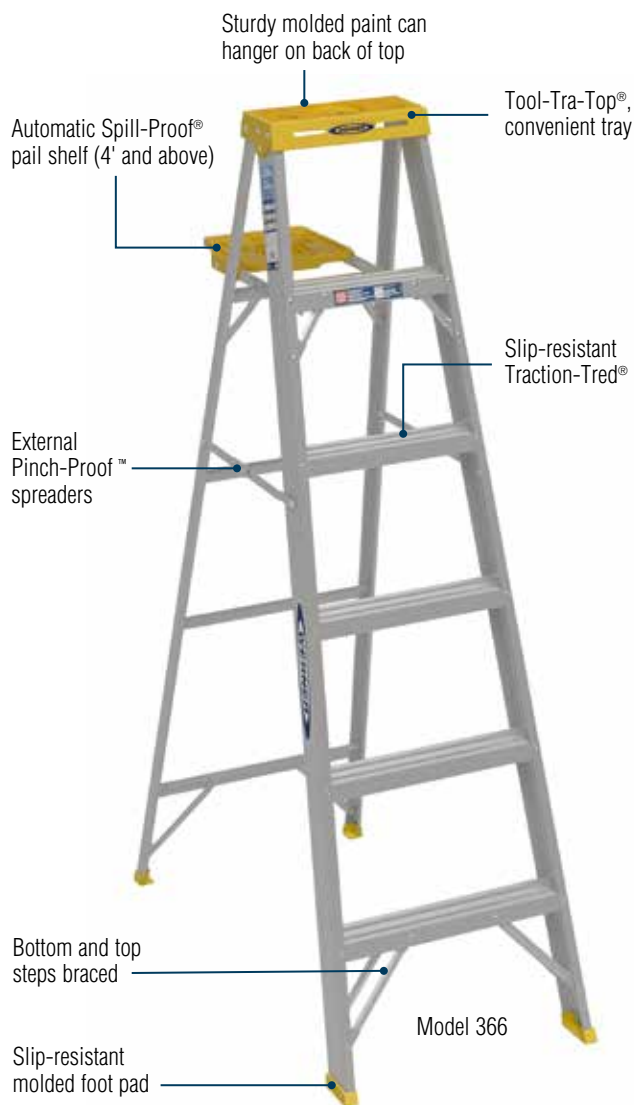**360SERIES** Stepladder**250lbs.** LOAD CAPACITY PER SIDE**TYPE I**  
DUTY RATING**SPECIFICATIONS**

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
363	3'	17"	23-1/4"	1.7	8.0
364	4'	18-1/2"	29-1/4"	2.4	10.5
365	5'	20"	35-1/2"	3.1	12.5
366	6'	21-1/2"	41-5/8"	3.9	14.5
368	8'	24-1/2"	54"	5.7	21.5

**DIMENSIONS**


Top:	5" x 12-3/8"	Steps:	3" wide
Front Rails:	3" wide	Rear Rails:	1-1/8" wide
Front Flange:	3/4" wide	Rear Flange:	1" wide

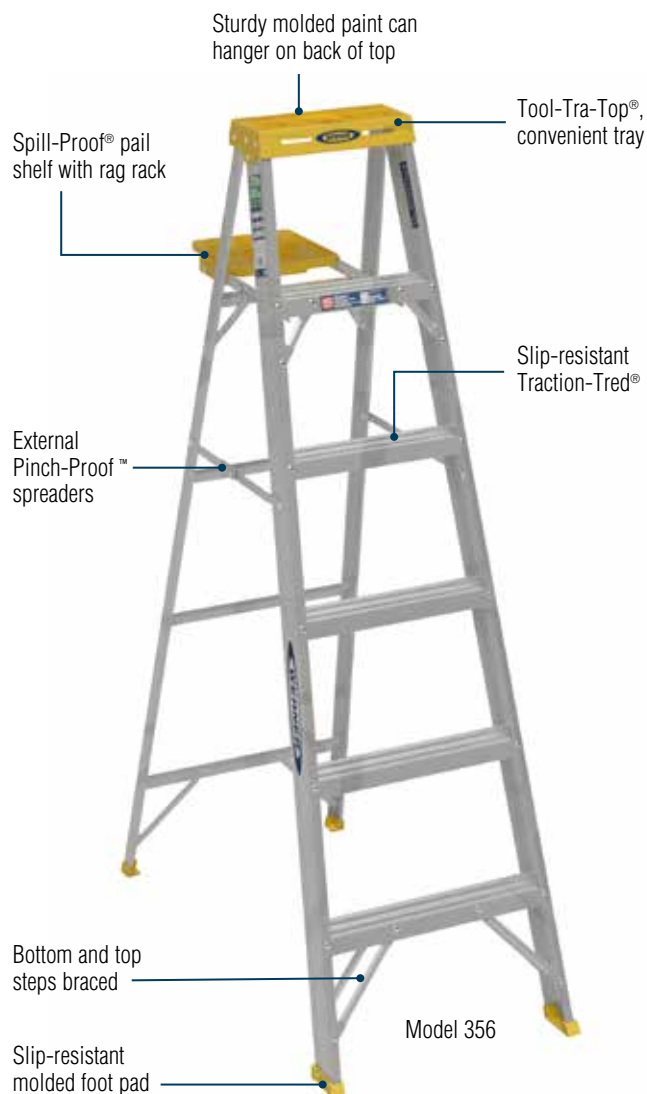**350SERIES** Stepladder**225lbs.** LOAD CAPACITY**TYPE II**  
DUTY RATING**SPECIFICATIONS**

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
354	4'	18-1/2"	29-1/4"	2.4	10.0
355	5'	20"	35-1/2"	3.1	12.0
356	6'	21-1/2"	41-5/8"	3.9	13.5

**DIMENSIONS**

Top:	4-5/8" x 12-1/2"	Steps:	3" wide
Front Rails:	3" wide	Rear Rails:	1-1/8" wide
Front Flange:	3/4" wide	Rear Flange:	1" wide

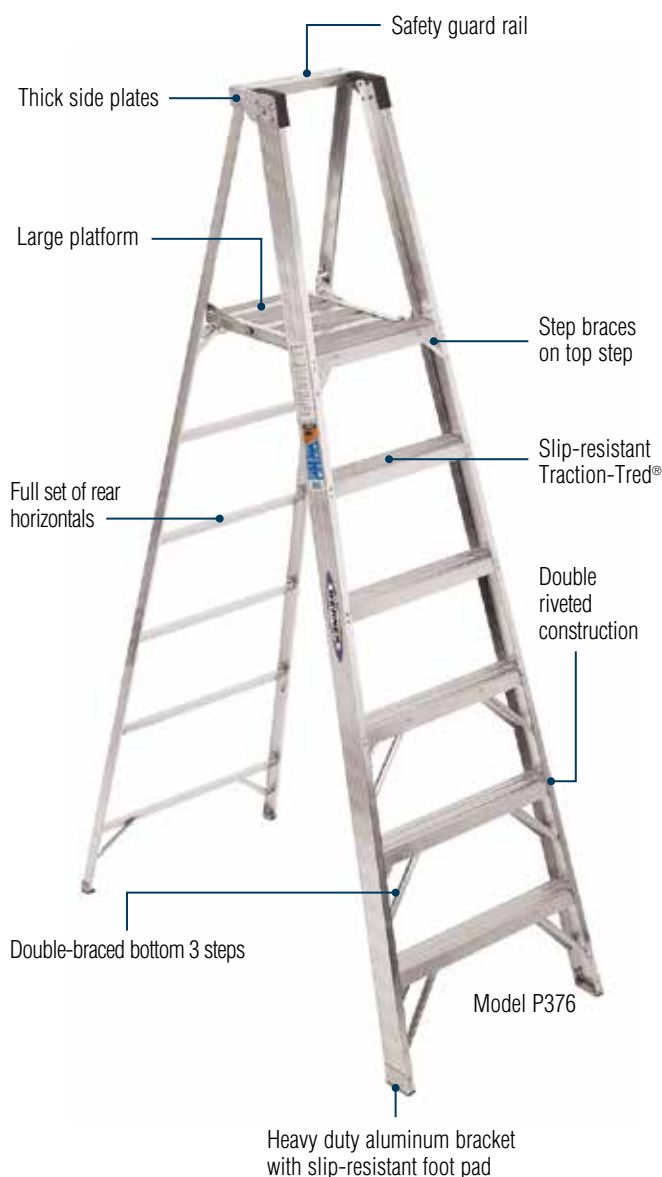**P370SERIES** Platform Ladder**300lbs.** LOAD CAPACITY**TYPE IA**  
DUTY RATING

- External Pinch-Proof™ spreaders on 8' model


**SPECIFICATIONS**

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
P372	2'	4'	21-1/4"	30"	3.0	12.0
P373	3'	5'	23"	36-1/4"	3.9	14.5
P374	4'	6'	24-3/4"	42-3/4"	4.9	17.0
P376	6'	8'	28-1/4"	54-3/4"	7.1	23.0
P378	8'	10'	31-3/4"	67"	8.4	32.0

**DIMENSIONS**

Platform:	12-5/8" x 18"	Steps:	3" wide
Front Rails:	3" wide	Rear Rails:	1-1/4" wide
Front Flange:	7/8" wide	Rear Flange:	1" wide

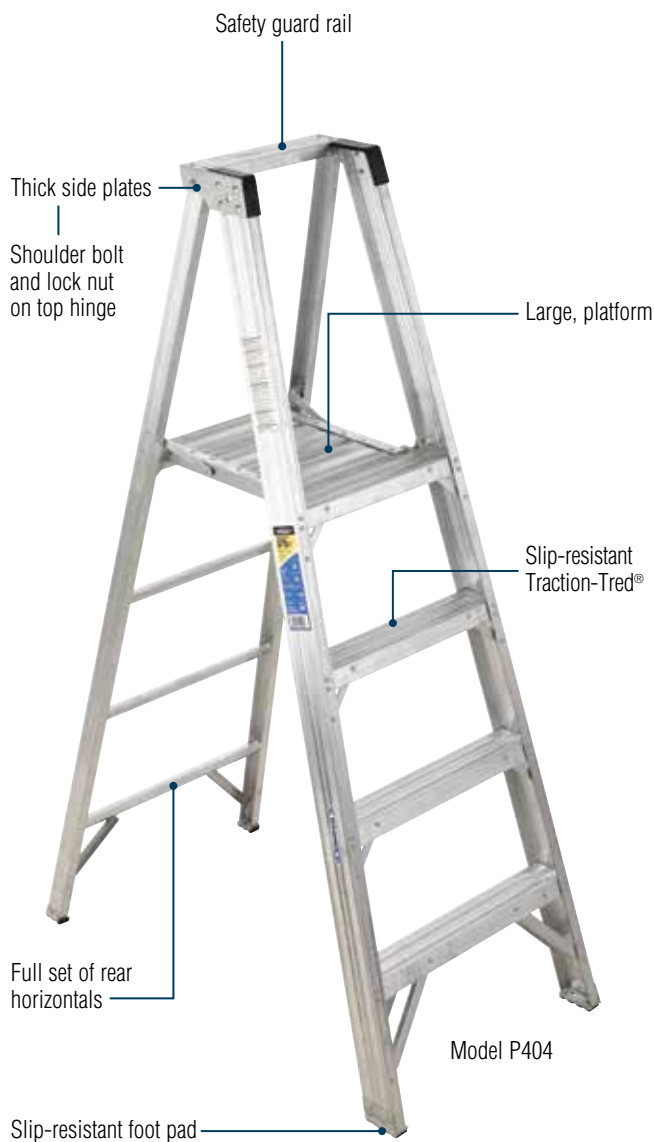

**P400SERIES** Platform Ladder**375lbs.** LOAD CAPACITY**TYPE IAA**  
DUTY RATING

- Internal spreaders on 8' and above

**SPECIFICATIONS**

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
P404	4'	6'	24-3/4"	42-1/16"	7.1	25.0
P406	6'	8'	28-1/4"	54-3/4"	10.1	33.5
P408	8'	10'	31-3/4"	79-1/2"	20.3	45.5

**DIMENSIONS**

Platform:	12-5/8" x 15"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-1/8" wide	Rear Flange:	1" wide

**P400SERIES** Platform Ladder**300lbs.** LOAD CAPACITY**TYPE IA**  
DUTY RATING

- Internal spreaders on 8' and above

**SPECIFICATIONS**

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
P410	10'	12'	35-1/4"	79-3/8"	20.3	54.5
P412	12'	14'	38-3/4"	91-11/16"	25.2	66.0
P414	14'	16'	42-1/4"	104"	31.1	79.5

**DIMENSIONS**

Platform:	12-5/8" x 15"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-1/8" wide	Rear Flange:	1" wide





**PT370SERIES** Stockr's Ladder®††**300lbs.** LOAD CAPACITY PER SIDE**TYPE IA**  
DUTY RATING

- Easy to handle and folds to a 10" width for storage
- Unique combination of one person, two person†† and platform ladder use
- Internal Pinch-Proof™ aluminum spreaders on 8' and 10' models


**SPECIFICATIONS**

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
PT374	4'	6'	24-3/4"	50-1/2"	8.9	27.0
PT376	6'	8'	28-1/4"	65-1/4"	13.5	36.0
PT378	8'	10'	31-3/4"	81-1/2"	19.0	46.5
PT310	10'	12'	34-1/4"	96"	24.5	58.5

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

**DIMENSIONS**

Platform:	12-3/4" x 22"	Steps:	3" wide
Rails:	3" wide	Flange:	3/4" wide

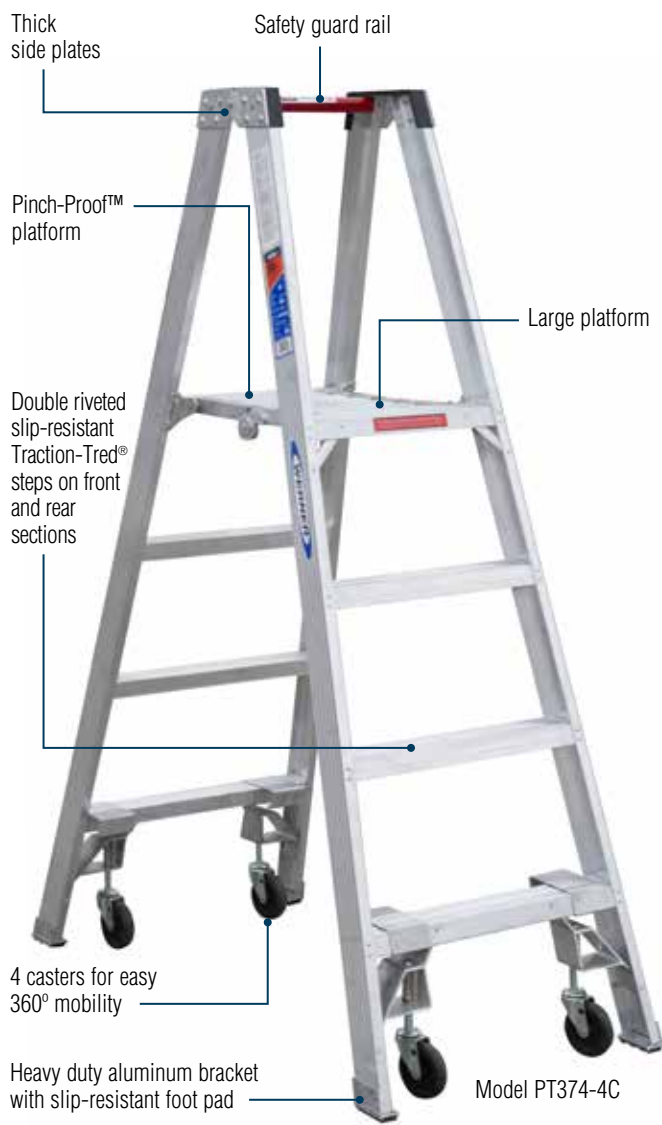**PT370-4CSERIES** Stockr's Ladder®††**300lbs.** LOAD CAPACITY PER SIDE**TYPE IA**  
DUTY RATING

- 4 casters allow for easy 360° mobility
- Easy to handle and folds to a 10" width for storage
- Unique combination of one person, two person†† and platform ladder use
- Internal Pinch-Proof™ aluminum spreaders on 8' and 10' models

**SPECIFICATIONS**


Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
PT374-4C	4'	6'	24-3/4"	50-1/2"	8.9	33.5
PT376-4C	6'	8'	28-1/4"	65-1/4"	13.5	42.5
PT378-4C	8'	10'	31-3/4"	81-1/2"	19.0	54.0
PT310-4C	10'	12'	34-1/4"	96"	24.5	65.5

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

**DIMENSIONS**

Platform:	12-3/4" x 22"	Steps:	3" wide
Rails:	3" wide	Flange:	3/4" wide

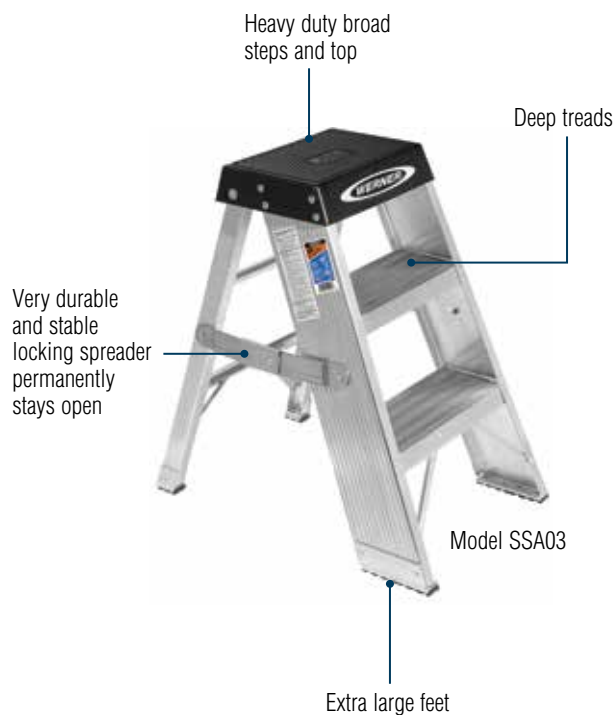

**SSA00SERIES** Step Stand**375lbs.** LOAD CAPACITY**TYPE IAA**  
DUTY RATING


- Heavy duty 9in x 14in top provides large standing surface
- Broad, 6 inch steps feature deep treads for slip resistance
- Permanently locking spreader for durability & stability  
(Note: Once opened, it remains permanently locked in open position)
- Extra-large feet for use on gratings

**SPECIFICATIONS**

Model No.	Size	Max. Standing Height	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
SSA02	2'	20"	17"	21"	2.6	16.0
SSA03	3'	30"	18-3/4"	27-1/2"	4.0	21.0

**DIMENSIONS**

Top:	9" x 14"	Steps:	6" wide
Front Rails:	6" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-1/8" wide	Rear Flange:	1-3/16" wide

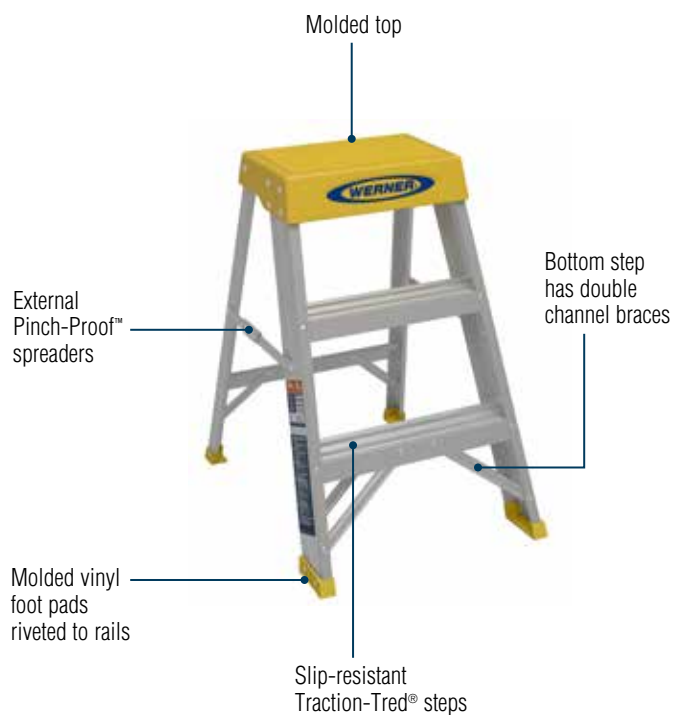**150BMODEL** Step Stool**300lbs.** LOAD CAPACITY**TYPE IA**  
DUTY RATING

- Molded top provides large standing platform
- External Pinch-Proof™ spreaders
- Slip-resistant Traction-Tred® steps
- Molded vinyl foot pads riveted to rails
- Bottom step has durable aluminum braces
- Ideal for construction, plant, office and home applications


**SPECIFICATIONS**

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
150B	2'	17"	19"	1.9	5.5

**DIMENSIONS**

Top:	6" x 12-3/8"	Steps:	3" wide
Front Rails:	3" wide	Rear Rails:	1-1/8" wide
Front Flange:	3/4" wide	Rear Flange:	1" wide

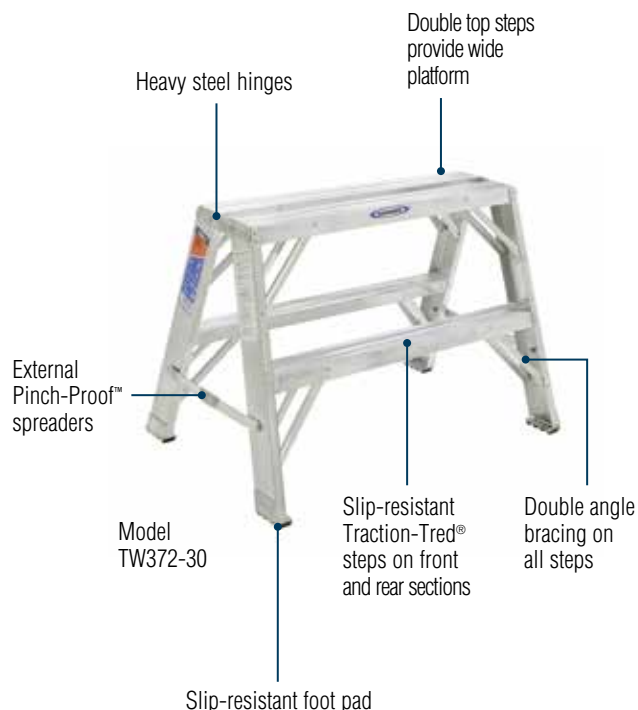

**TW370-30SERIES** Portable Work Stand††**300lbs.** LOAD CAPACITY PER SIDE**TYPE IA**  
DUTY RATING

- Double top steps provide wide platform
- Heavy steel hinges
- Slip-resistant Traction-Tred® steps on front and rear sections
- External Pinch-Proof™ spreaders for easy opening and closing
- Double angle bracing on all steps
- Mar-resistant feet for slip-resistance on concrete, wood and vinyl floors
- Extra wide for versatile use as work stand, stage or material support
- Lightweight and portable
- Design for one or two-person jobs
- Maximum load per side, including person and materials, shall not exceed duty rating of ladder


**SPECIFICATIONS**

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
TW372-30	2'	33"	22"	4.0	12.5
TW373-30	3'	34-3/4"	29"	5.6	17.5
TW374-30	4'	36-1/2"	36"	7.8	24.0

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

**DIMENSIONS**

Top:	8" x 30"	Steps:	3" wide
Rails:	3" wide	Flange:	7/8" wide

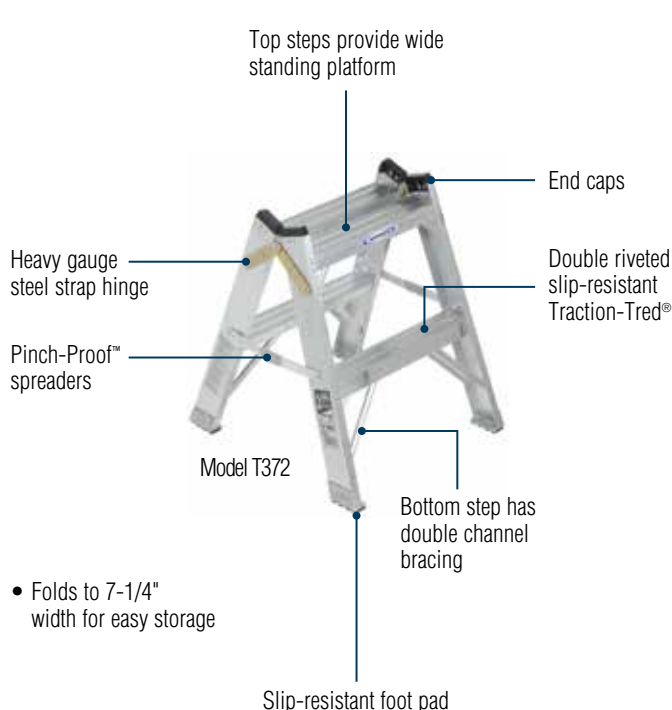**MODEL Twin Step Stool††****300lbs.** LOAD CAPACITY PER SIDE**TYPE IA**  
DUTY RATING

- Folds to 7-1/4" width for easy storage

- Top steps provide wide standing platform
- Heavy gauge steel strap hinge
- Double riveted slip-resistant Traction-Tred® steps
- Fully braced steps
- Folds to 7.25 inch width for easy storage
- Design for one or two-person jobs.
- Maximum load per side, including person and materials, shall not exceed duty rating of ladder
- Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder

**SPECIFICATIONS**

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T372	2'	21-1/4"	23-3/8"	2.3	9.0

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

**DIMENSIONS**

Rails:	3" wide	Flange:	7/8" wide
Steps:	3" wide		

Note: Planks or platforms shall be secured to the step stools. The ends of each plank or platform shall extend beyond the outside edge of each step stool by a minimum of 4 inches and a maximum of 10 inches.







## AP-20 SERIES Work Platform

**225lbs.** LOAD CAPACITY



Large platform



Platform legs lock securely in place when in use and fold underneath platform for compact storage

Model AP-20

Non-marring feet

Work comfortably along walls and windows. Ideal for painting.



### SPECIFICATIONS

Model No.	Height	Width	Depth	Approx. Cu. Ft.	Approx. Shipping Wt. Lbs.
AP-20*	20-9/16"	50-1/4"	15-5/8"	2.1	12.1
AP-20-MP6†	41"	16-5/8"	35-3/4"	14.1	75.0

\* Note: Dimensions of fully open individual unit    † Note: Dimensions for packaged unit of 6

### DIMENSIONS

Top Deck:	39-1/2" x 12"	Highest Standing Level:	20-9/16"
-----------	---------------	-------------------------	----------

## AP-25 MODEL Work Platform

**300lbs.** LOAD CAPACITY

Large 45in x 12in Pro deck is 12% larger

Platform legs lock securely in place when in use and fold underneath platform for compact storage

Model AP-25

Non-marring feet

EASY-GRAB handles make it simple to carry your platform quickly and safely



EASY-GRAB handles make it simple to carry your platform quickly and safely

### SPECIFICATIONS

Model No.	Height	Width	Depth	Approx. Cu. Ft.	Approx. Shipping Wt. Lbs.
AP-25*	20-1/32"	52-13/32"	15-5/16"	1.5	14.8

\* Note: Dimensions of fully open individual unit

### DIMENSIONS

Top Deck:	45" x 12"	Highest Standing Level:	20"
-----------	-----------	-------------------------	-----








## Features

- 5 ladders in 1. Extension Ladder 2. Double-Sided Twin Step Ladder 3. Stairway Ladder 4. 90-degree Wall Ladder 5. 2 self-supported Scaffolding Bases
- Increased durability with new shatterproof j-locks and over-sized push knobs
- Extra wide flared bottom for firm support
- Slip-resistant feet
- Adjustable telescoping design for maximum versatility
- Designed for both 1-person and 2-person jobs
- Size refers to the ANSI definition of length.  
ANSI code: A14.2-2017 6.2.4
- New industrial design
- Shatter-Proof J-Locks
- Impact resistant push knobs

# 5 LADDERS IN ONE

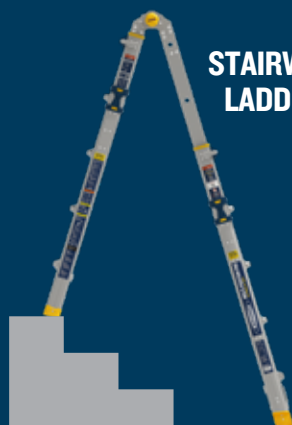

**STAIRWAY  
LADDER**



**STEPLADDER**

**EXTENSION  
LADDER**



**WALL  
LADDER**



**2-SCAFFOLD BASE\***  
\*plank and tie-downs not included





## MT-00IAA SERIES Telescoping Multi-Ladder††

**375lbs.** LOAD CAPACITY PER SIDE

**TYPE IAA**  
DUTY RATING

### 5 positions

- Easily converts to:
1. Stairway stepladder
  2. Twin stepladder
  3. Extension ladder
  4. 2-Scaffold bases
  5. Wall ladder



Model MT-22IAA

### SPECIFICATIONS

Model No.	Stepladder Height	Extension Height	Stair Height	Scaffold Height	Wall Height	Approx. Ship Wt. Lbs.
MT-14IAA	3' to 5'	7' to 11'	3' to 5'	1'-1" to 2'	4' to 5'	25.4
MT-18IAA	4' to 7'	9' to 15'	4' to 7'	1'-1" to 3'	5' to 7'	56.4
MT-22IAA	5' to 9'	11' to 19'	5' to 9'	1'-1" to 3'	6' to 9'	42.7

## MT SERIES Telescoping Multi-Ladder††

**300lbs.** LOAD CAPACITY PER SIDE

**TYPE IA**  
DUTY RATING

### 5 positions

- Easily converts to:
1. Stairway stepladder
  2. Twin stepladder
  3. Extension ladder
  4. 2-Scaffold bases
  5. Wall ladder



Model MT-22

- Telescoping design for maximum versatility

### SPECIFICATIONS

Model No.	Stepladder Height	Extension Height	Stair Height	Scaffold Height	Wall Height	Approx. Ship Wt. Lbs.
MT-13	3' to 5'	7' to 11'	3' to 5'	1' to 2'	4' to 5'	35
MT-17	4' to 7'	9' to 15'	4' to 7'	1' to 3'	5' to 7'	44
MT-22	5' to 9'	11' to 19'	5' to 9'	1' to 4'	6' to 9'	50
MT-26	6' to 11'	13' to 23'	6' to 11'	1' to 5'	7' to 11'	66

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

### DIMENSIONS

Rails:	2-5/8" wide	Rungs:	1" wide
Flange:	1" wide		

**500-I SERIES** Round Rung Straight Ladder**375lbs.** LOAD CAPACITY**TYPE IAA**  
DUTY RATING

Exclusive  
Alflo® rung  
joint means  
Twist-Proof®  
performance

Extra heavy duty  
I-beam rails

Traction-Tred® deeply  
serrated aluminum  
round rungs



Model  
508-1

**SPECIFICATIONS**

Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
508-1	8'	2.9	16.5
510-1	10'	3.6	20.0
512-1	12'	4.3	24.0
514-1	14'	5.0	27.5
516-1	16'	5.7	37.0

**DIMENSIONS**

	Rails:	Flange:	Round Rungs:	Base Width:
8' to 14'	3" wide	1-3/16"	1-1/4"	16-7/8"
16'	3" wide	1-1/4"	1-1/4"	16-7/8"

**500-I SERIES** Round Rung Straight Ladder**300lbs.** LOAD CAPACITY**TYPE IA**  
DUTY RATING

Exclusive  
Alflo® rung  
joint means  
Twist-Proof®  
performance

Extra heavy duty  
I-beam rails

Traction-Tred® deeply  
serrated aluminum  
round rungs



Model  
520-1


**SPECIFICATIONS**

Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
518-1	18'	6.4	41.0
520-1	20'	7.1	45.5
524-1	24'	14.0	60.5

**DIMENSIONS**

	Rails:	Flange:	Round Rungs:	Base Width:
18' to 20'	3" wide	1-1/4"	1-1/4"	16-7/8"
24'	4" wide	1-3/8"	1-1/4"	20-5/8"

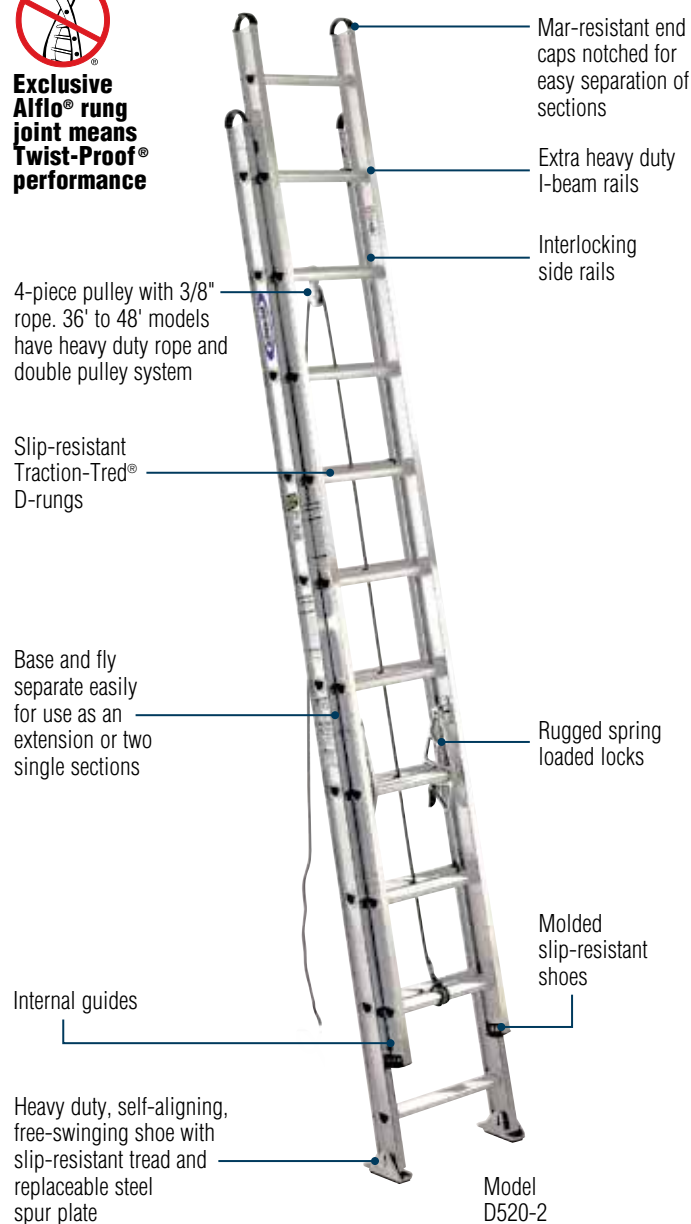


**D500-2SERIES D-Rung Extension Ladder****375lbs.** LOAD CAPACITY**TYPE IAA**  
DUTY RATING**Exclusive Alflo® rung joint means Twist-Proof® performance****SPECIFICATIONS**

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D520-2	20'	17'	8.8	42.0
D524-2	24'	21'	10.4	49.0
D528-2	28'	25'	12.1	65.5
D532-2	32'	29'	13.8	74.0

**DIMENSIONS**

Rails:	3-1/4" wide	Rungs:	1-3/4"
Flange:	1-3/16" wide (20' & 24') 1-1/4" wide (28' to 48')	Base Section Width:	19-1/8" outside shoes 20-1/8" (44' & 48')

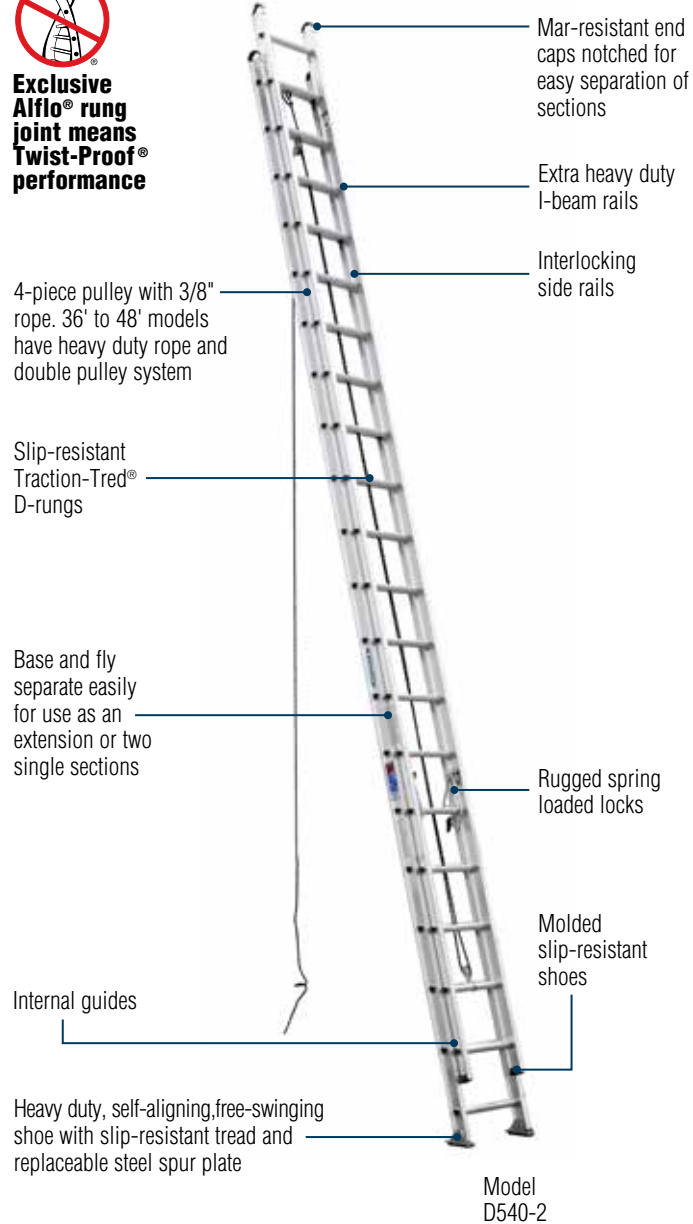**D500-2SERIES D-Rung Extension Ladder****300lbs.** LOAD CAPACITY**TYPE IA**  
DUTY RATING**Exclusive Alflo® rung joint means Twist-Proof® performance****SPECIFICATIONS**

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D540-2	40'	35'	17.0	99.5
D544-2	44'	39'	21.4	131.0
D548-2	48'	43'	23.3	142.5

**DIMENSIONS**

Rails:	3-1/4" wide	Rungs:	1-3/4"
Flange:	1-3/16" wide (20' & 24') 1-1/4" wide (28' to 48')	Base Section Width:	19-1/8" outside shoes 20-1/8" (44' & 48')





**D1500-2/D1500-ISERIES** D-Rung Extension/Straight Ladder**300lbs.** LOAD CAPACITY**TYPE IA**  
DUTY RATING

**Exclusive Alflo® rung joint means Twist-Proof® performance**

Thick guide bracket engages full fly rail

Smooth operating pulley design

Slip-resistant Traction-Tred® D-rungs

Guide brackets

Rugged shoe rests flat or is held in spur position with Shu-Lok® feature

Mar-resistant end caps

Extra heavy duty I-beam rails

Base and fly separate easily for use as an extension or two single sections

Rugged spring loaded locks

Model  
D1524-2

**SPECIFICATIONS**

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Single Ladder Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1516-2‡	16'	13'	6.2	30.5	D1508-1	8'	3.6	14.5
D1520-2	20'	17'	7.7	37.0	D1510-1	10'	4.5	17.5
D1524-2	24'	21'	9.2	45.0	D1512-1	12'	5.4	21.5
D1528-2	28'	25'	10.7	56.0	D1514-1	14'	6.2	27.0
D1532-2	32'	29'	12.2	67.0	D1516-1	16'	7.1	32.5
D1536-2	36'	32'	13.7	80.0	D1518-1	18'	8.0	38.5
D1540-2	40'	35'	15.2	89.5	D1520-1	20'	8.9	43.5

‡ Note: D1516-2 is not equipped with rope and pulley

**DIMENSIONS**

Rails:	3" wide	Rungs:	1-3/4"
Flange:	1-1/8" wide	Base Width:	18-1/8" outside rails

**560-3MODEL** Round Rung Extension Ladder**250lbs.** LOAD CAPACITY**TYPE I**  
DUTY RATING

**Exclusive Alflo® rung joint means Twist-Proof® performance**

Removable top fly section can be used as a single ladder

Heavy duty rope and double pulley system lift fly and intermediate sections

Bottom base section with top fly section can be used as a 40' extension ladder

Rugged spring loaded locks

Model  
560-3

Molded slip-resistant shoes

**SPECIFICATIONS**


Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
560-3	60'	47'	26.8	179.0

**DIMENSIONS**

Rails:	4" wide	Rungs:	1-1/4"
Flange:	2" wide (base & intermediate sections) 1-3/8" wide (top fly section)	Base Width:	23-1/2"

**D1300-2SERIES** D-Rung Extension Ladder**250lbs.** LOAD CAPACITY**TYPE I**  
DUTY RATING

**Exclusive Alflo® rung joint means Twist-Proof® performance**

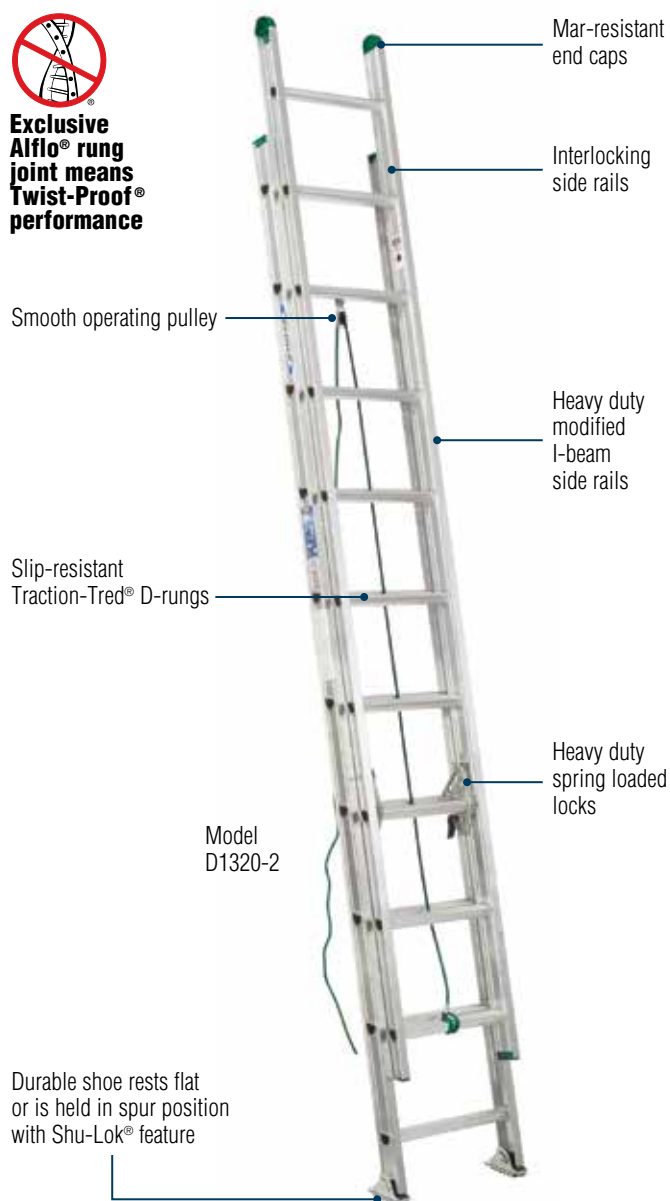**SPECIFICATIONS**

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1316-2†	16'	13'	5.8	26.0
D1320-2	20'	17'	7.2	32.5
D1324-2	24'	21'	8.6	40.0
D1328-2	28'	25'	10.0	50.5
D1332-2	32'	29'	11.5	63.5
D1336-2	36'	32'	13.0	77.5
D1340-2	40'	35'	14.4	85.5


† Note: D1316-2 is not equipped with rope and pulley

**DIMENSIONS**

Rails:	3" wide	Rungs:	1-3/4"
Flange:	1-1/16" wide	Base Width:	17-3/8" outside rails

**D1700-2SERIES** Ext Ladder w/Integrated Leveling**225bs.** LOAD CAPACITY**TYPE II**  
DUTY RATING

**Exclusive Alflo® rung joint means Twist-Proof® performance**

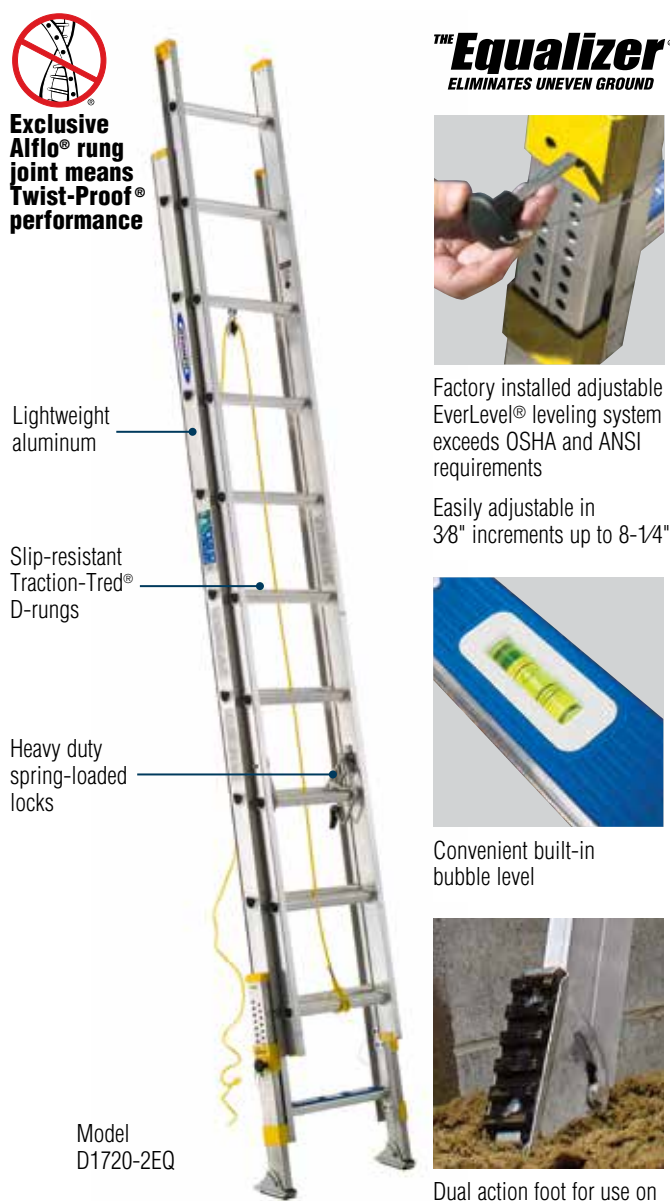


**THE Equalizer®**  
ELIMINATES UNEVEN GROUND



Factory installed adjustable EverLevel® leveling system exceeds OSHA and ANSI requirements

Easily adjustable in 3/8" increments up to 8-1/4"



Convenient built-in bubble level



Dual action foot for use on hard or penetrable surfaces

**SPECIFICATIONS**

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1716-2EQ†	16'	13'	6.5	27.5
D1720-2EQ	20'	17'	8.1	32.5
D1724-2EQ	24'	21'	9.6	39.0
D1728-2EQ	28'	25'	11.2	48.5

† Note: D1816-2EQ and D1716EQ are not equipped with rope and pulley


**DIMENSIONS**

Rails:	3" wide	Fly Width:	14-1/4" outside rails
Flange:	1-1/16" wide	Base Width:	17-3/8" outside rails
Rungs:	1-3/4"		(20-3/4" to outside of feet)



**D1200-2SERIES** D-Rung Extension Ladder**225lbs.** LOAD CAPACITY**TYPE II**  
DUTY RATING

**Exclusive Alflo® rung joint means Twist-Proof® performance**

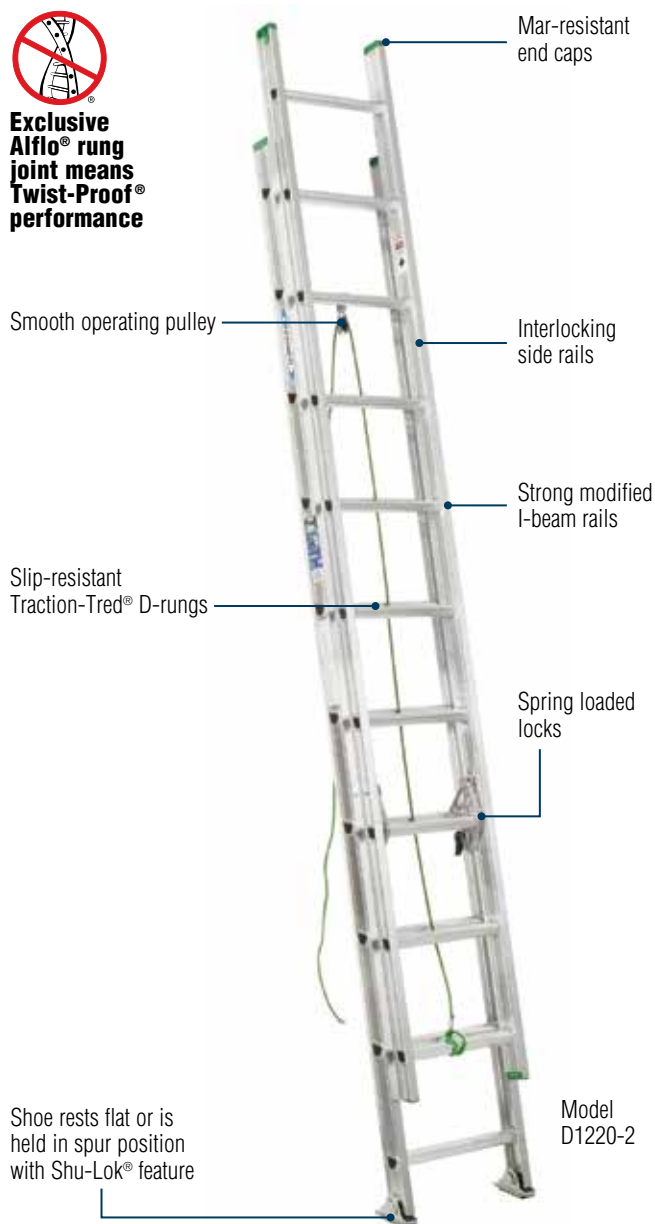**D1200-3SERIES** D-Rung Compact Extension Ladder**225lbs.** LOAD CAPACITY**TYPE II**  
DUTY RATING

**Exclusive Alflo® rung joint means Twist-Proof® performance**

**SPECIFICATIONS**

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1216-2†	16'	13'	5.8	22.0
D1220-2	20'	17'	7.2	27.0
D1224-2	24'	21'	8.6	33.5
D1228-2	28'	25'	10.0	43.0
D1232-2	32'	29'	11.5	54.0
D1236-2	36'	32'	13.0	62.5
D1240-2	40'	35'	14.4	73.5

† Note: D1216-2 is not equipped with rope and pulley

**DIMENSIONS**

Rails:	3" wide	Rungs:	1-3/4"
Flange:	1" wide	Base Width:	17-3/8" outside rails

**SPECIFICATIONS**

Model No.	Total Length of Sections	Total Length in Storage Position 2 vs. 3 piece*	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1216-3	18'	8' / 6'	13'	5.9	26.5
D1224-3	27'	12' / 9'	21'	8.7	38.5


\* Total Length of ladder in storage position, comparison of Standard 2 - piece vs. New 3 - piece extension ladder.

**DIMENSIONS**

Rails:	3" wide	Fly Width:	14-1/4" outside rails
Flange:	1-1/16" wide	Base Width:	17-3/8" outside rails
Rungs:	1-3/4"		(20-3/4" to outside of feet)



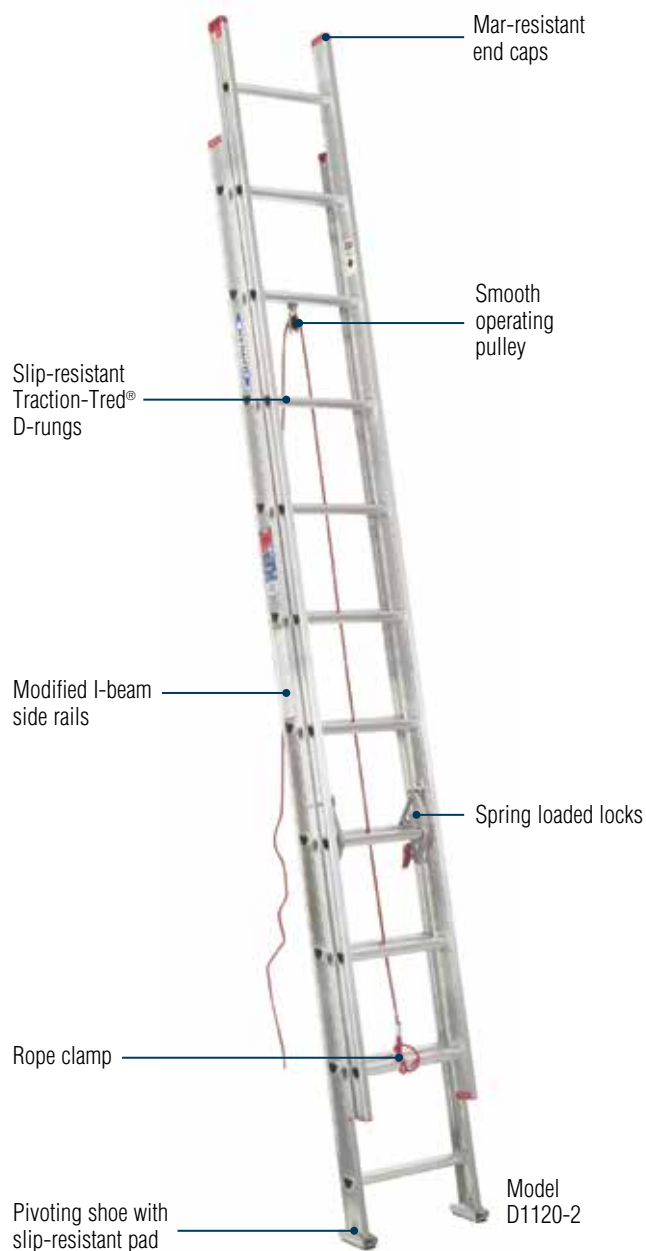


**D1100-2SERIES** D-Rung Extension Ladder**200lbs.** LOAD CAPACITY**TYPE III**  
DUTY RATING**SPECIFICATIONS**

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1116-2†	16'	13'	4.9	18.5
D1120-2	20'	17'	6.2	23.0
D1124-2	24'	21'	7.4	30.0
D1128-2	28'	25'	9.0	38.5

† Note: D1116-2 is not equipped with rope and pulley

**DIMENSIONS**

Rails:	2-3/4" wide (16' & 20') 3" wide (24' & 28')	Rungs:	1-1/2"
Flange:	15/16" wide	Base Width:	16" outside rails

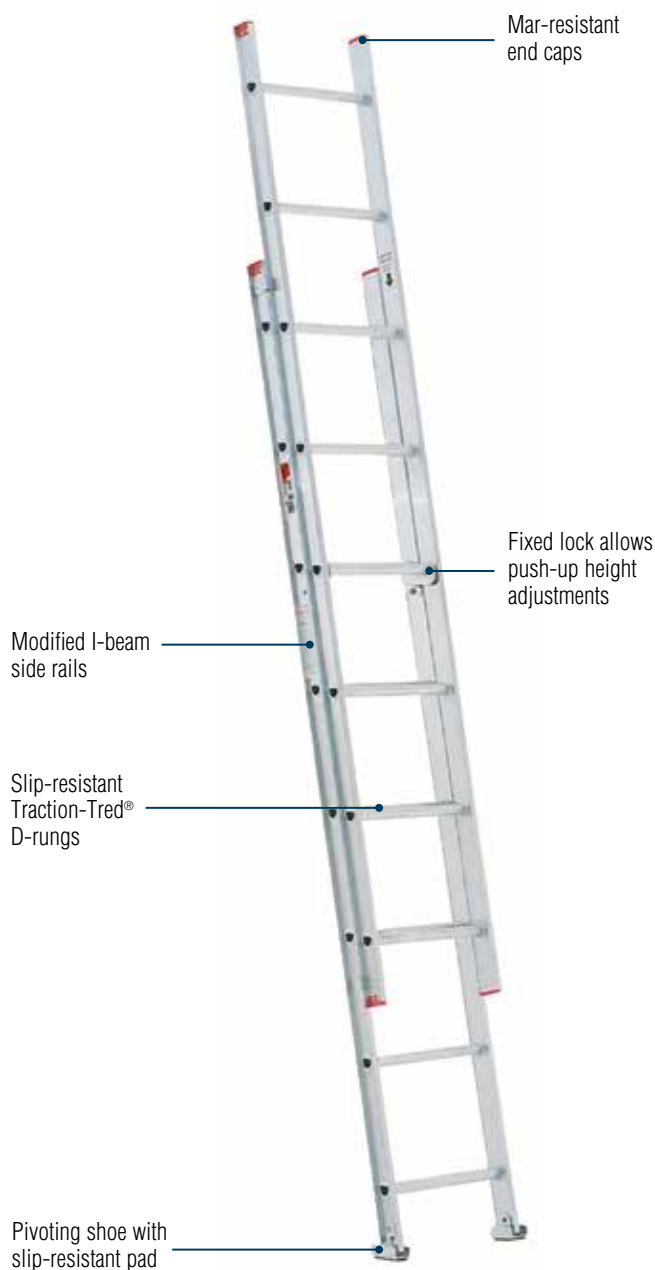**D716-2MODEL** D-Rung Extension Ladder**200lbs.** LOAD CAPACITY**TYPE III**  
DUTY RATING**SPECIFICATIONS**

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D716-2	16'	13'	4.6	17.5

**DIMENSIONS**

Rails:	2-1/2" wide	Rungs:	1-1/4"
Flange:	3/4" wide	Base Width:	15-3/4" outside rails



## AH SERIES Aluminum Folding Attic Ladder

**375lbs.** LOAD CAPACITY

STANDARD / EXTRA WIDE OPENINGS



Step-by-Step Installation Made Easy  
**Online Video**  
werneratticladders.com

- Lightweight – easy to open, close and install
- Attractive – will not splinter, decay or rust

### SPECIFICATIONS

Model No.	Rough Opening Width x Length	Floor to Ceiling Height Range	Approx. Ladder Width	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
AH2210	22-1/2" x 54"	7'8" to 10'3"	14-1/8"	6.8	48.5
AH2510	25" x 54"	7'8" to 10'3"	17-1/8"	7.6	52.0
AH2512	25" x 66"	10'5" to 12'	17-1/8"	9.2	58.5


### DIMENSIONS

Rails:	2-3/8" wide	Steps:	3" wide
Flange:	1-1/2" wide		

## AA MODEL Compact Aluminum Attic Ladder

**250lbs.** LOAD CAPACITY

BUILT FOR SMALL OPENINGS

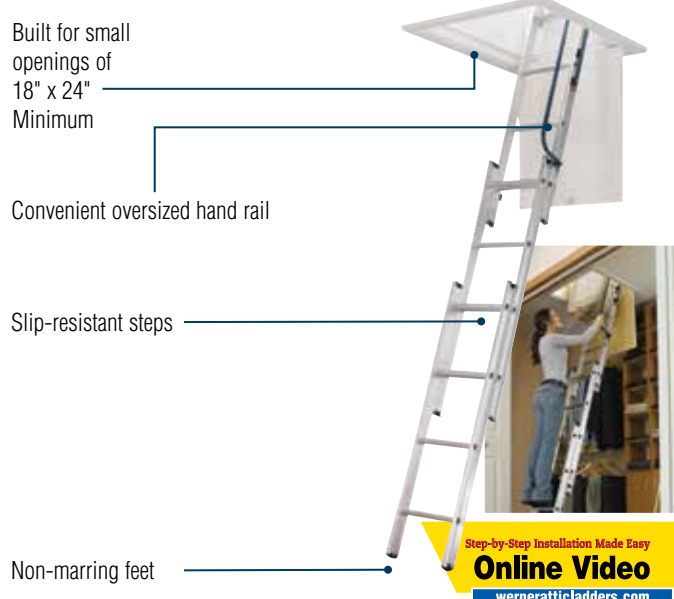

Hallways

Garages

Tight Spaces

### SPECIFICATIONS

Model No.	Rough Opening Width x Length	Floor to Floor Height Range	Approx. Ladder Width	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
AA1510	18" x 24" Minimum	7' to 9'10"	12-1/8"	2.55	15.5

### DIMENSIONS

Rails:	5/8" x 2-1/8" wide	Steps:	1-3/16" wide
--------	--------------------	--------	--------------

## ATTIC LADDER COMPARISON CHART

Product Advantages	AH SERIES	AA SERIES
Material	Aluminum	Aluminum
Style	Folding	Sliding
Size	8 ft., 10 ft., 12 ft.	7' - 9' 10"
Load Capacity	375 lbs.	250 lbs.
Ceiling Height Range	7' to 12'	7' to 9'10" (floor to floor)
Locking Device	Gas Strut	N/A
Opening Device	Rope	Push/Pull Rod
Door Material	Plywood	Not Included (Door hardware included)
Frame Material	Pine	N/A
Full Width Door Hinge	Yes	N/A
Metal-to-Metal Rail Hinge	Yes	N/A
Requires Cutting Rail	Yes	No
Separate Foot Attachment	Yes	No
Number of People for Installation	Two	One
Step Depth	3"	1-3/16"
Finished Rails with Eased Edges	2-3/8" wide	2-1/8" wide
Approximate Shipping Weight	48-58 lbs.	15.5 lbs.

**PS-48MODEL** Portable Scaffold**500lbs.** LOAD CAPACITY\***MULTIPLE  
WORKING HEIGHTS**

Mar-resistant wheels  
High grade wheels prevent marring by locking securely into place



Multi-use S-Hooks make transportation easy and are ToolLasso® ready



Extra wide 10" plank for secure standing and comfort


- Versatile; can be used as push cart, storage shelf or work bench
- \*250 lbs. per plank (500 lbs. combined)

**SPECIFICATIONS**

Model No.	Height	Width	Depth	Approx. Cu. Ft Per Packaged Unit	Approx. Shipping Wt. Lbs.
PS-48	50-1/8"	46-1/8"	25-1/2"	3.4	60.0

**PLANK DIMENSIONS**

	Length	Width
Narrow Plank	46"	6"
Wide Plank	46"	10"

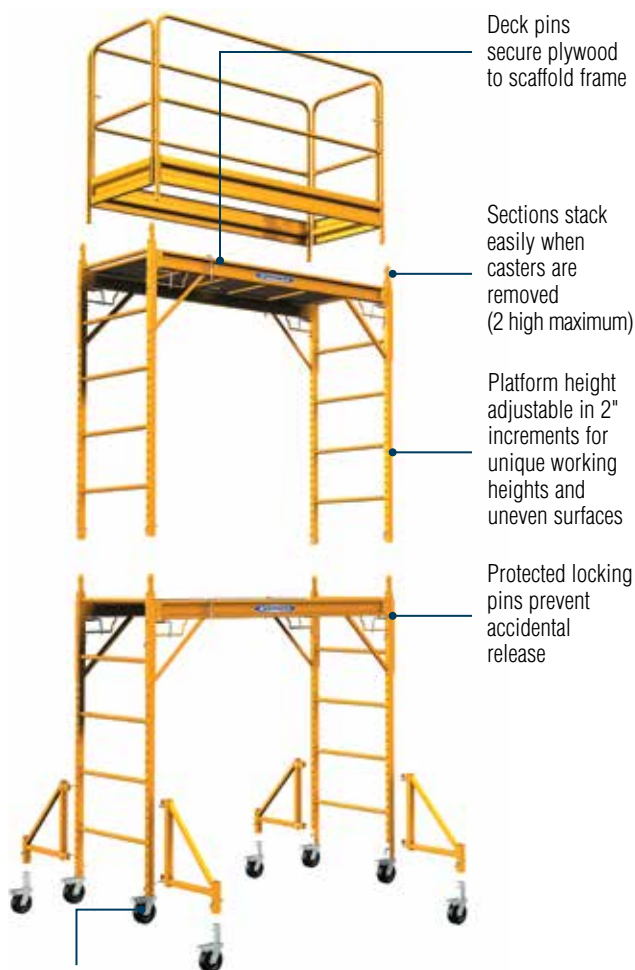**SRS-72MODEL** 6' Steel Rolling Scaffold**1000lbs.** LOAD CAPACITY\*

Deck pins secure plywood to scaffold frame

Sections stack easily when casters are removed (2 high maximum)

Platform height adjustable in 2" increments for unique working heights and uneven surfaces

Protected locking pins prevent accidental release

Locking casters swivel for convenient 360° mobility

- Easy one-person assembly- No tools required for quick setup and tear down.
- \*1000 lbs. load capacity distributed evenly

**DIMENSIONS**

Model No.	Approx. Width	Approx. Length	Approx. Height	Approx. Shipping Wt. Lbs.
SRS-72	29-1/2"	73-3/4"	74-7/8"	127
SRS-72T	29-1/2"	73-3/4"	74-7/8"	130

**COMPONENT DIMENSIONS**

Component	Quantity Included	Approx. Width	Approx. Length	Approx. Height
Frames	2	29"	68-3/4"	1-1/2"
Arm Braces	2	1-1/2"	73-7/8"	17-7/8"
Plywood Deck	1	28-1/2"	66-3/4"	1-1/2"
Locking Casters	4	5-1/8"	9-7/8"	—

**ACCESSORIES (AVAILABLE SEPARATELY)**

Model No.	Description	Approx. Width	Approx. Length	Approx. Height	Approx. Shipping Wt. Lbs.
SRO-72-4	Outriggers (4-pc master carton)	18"	20-3/4"	—	37.5
SRO24-72-4	Outriggers (4-pc master carton)	18"	24"	—	38
SRG-72	Guard Rail and Toeboard Kit	28-7/8"	69-5/8"	42"	70.5
SRC-72-4	Castors (4-pc master carton)	5-1/8"	1-1/8"	9-7/8"	20.0
SRD-72	Plywood Deck	28-1/2"	66-3/4"	2"	32.5
SRD-72T	Plywood Deck with Trap Door	28-1/2"	66-3/4"	2"	35.5


Note: Outriggers and Guard Rails are required when working height reaches 10'



## PA200SERIES Aluminum Extension Plank

## 5600SERIES 2-Piece Extruded Aluma-Board™

- 1 person, 250 lb. Load Capacity.
- For use on stepladders, telescoping multiladders, extension trestle ladders and extension and single ladders equipped with ladder jacks.

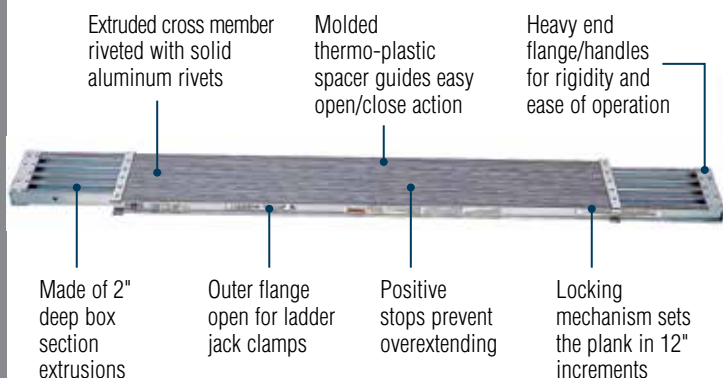

### SPECIFICATIONS

Model No.	Closed Position	Open Position	Approx. Width	Inner Rails	Outer Flanged Rails	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
PA206	6'	9'	14"	1-1/8" x 2"	1-7/8" x 2"	1.5	31.0
PA208	8'	13'	14"	1-1/8" x 2"	1-7/8" x 2"	2.0	40.5
PA210	10'	17'	14"	1-1/8" x 2"	1-7/8" x 2"	2.5	56.5

Note: When assembled as scaffold or staging, these planks must be used in conjunction with suitable guard rail protection in compliance with applicable governmental codes, ordinances, regulations and safe practice.

### SPECIFICATIONS

Model No.	Duty Rating/Sq. Ft.	Width	Side Rail Length	Side Rail Depth	Approx. Shipping Wt. Lbs.
5607-19	75 lbs.	19-1/16"	7'	2"	30.0

### FOR USE WITH STEEL SCAFFOLDS



## 5500SERIES Aluminum Decked Aluma-Plank®

## 5300SERIES Plywood Decked Aluma-Plank®

Model 5507-19



Model 5308-19



Model 5510-19



Model 5310-19



- 19-1/16 inch wide, 10-foot long aluminum decked plank
- Maximum load of 250lb (75 lb/sq ft) includes person and materials

- 19-1/16in wide, 10ft long plywood decked plank
- Maximum load 250lb including person and materials

### SPECIFICATIONS

Model No.	Duty Rating/Sq. Ft.	Width	Side Rail Length	Side Rail Depth	Approx. Shipping Wt. Lbs.
5507-19	75 lbs.	19-1/16"	7'	3"	25.0
5508-19	75 lbs.	19-1/16"	8'	4"	34.0
5510-19	75 lbs.	19-1/16"	10'	4"	43.0

FOR USE WITH STEEL SCAFFOLDS

### SPECIFICATIONS

Model No.	Duty Rating/Sq. Ft.	Width	Side Rail Length	Side Rail Depth	Approx. Shipping Wt. Lbs.
5307-19	75 lbs.	19-1/16"	7'	3-1/2"	27.0
5308-19	75 lbs.	19-1/16"	8'	4-1/2"	38.0
5310-19	75 lbs.	19-1/16"	10'	4-1/2"	47.0

FOR USE WITH STEEL SCAFFOLDS

# STEELPUMP JACK SYSTEM



- Exclusive Pole-Trak™ system with rugged hand crank and safety brake
- Slip-resistant foot lever with oversized boot strap
- Accommodates up to a 24" wide plank
- Economical and easy to operate
- Meets ANSI and OSHA standards

## • Pump Jack

## • Work Bench with Guard Rail Holder

## • Pole Anchor

## • Foldable Brace

**1** Foldable Support Brace (SPJ-SBF)



**2** Steel Work Bench/ Guard Rail Holder (SPJ-WB)



**3** Steel Pump Jack (SPJ-100)



**4** Steel Guard Rail Holder (SPJ-GRH)



**5** Pole Anchor for Steel Pump Jack (SPJ-PA-4)



## COMPONENTS SHOWN

Description	Model Number	Product Weight (lbs)
<b>1</b> Foldable Support Brace	SPJ-SBF	7.0
<b>2</b> Steel Work Bench/ Guard Rail Holder	SPJ-WB	11.0
<b>3</b> Steel Pump Jack	SPJ-100	23.0
<b>4</b> Steel Guard Rail Holder	SPJ-GRH	5.5
<b>5</b> Pole Anchor for Steel Pump Jack (Shipped in 4-packs)	SPJ-PA-4	5.5 (4-pk weight: 23.0)




# ALUMINUM PUMP JACK SYSTEM

- Versatile, dependable and easy to operate
- Field replaceable components
- Compatible and interchangeable with the leading competitor



Note: When working 10 ft. and above, OSHA requires fall protection. Refer to product labels.

- 1 Foldable Support  
Brace (PJ-SBF)



- 2 Nestable Stage  
(WNS 2512)



- 3 Safety Net  
(PJ-SN)



- 4 Work Bench  
(PJ-WB)



- 5 Pump Jack  
(PJ-100)



- 6 End Rail Kit  
(narrow) (PJ-ERN)

PJ-ERW  
kit for  
wide span  
available



- 7 24' Aluminum Pole  
(PJ-24P)

Also available:  
6' (PJ-6P)  
12' (PJ-12P)  
18' (PJ-18P)

- Pump Jack
- Work Bench
- Poles and Brace
- End Rail Kits
- Safety Net



## Nestable Stages



- Continuous work platform reduces trip hazard
- 2 Person – 500 lbs. Rated

## PUMP JACK COMPONENTS

Model No.	Description	Approx. Shipping Wt. Lbs.
PJ-100	Pump jack	30.0
PJ-PF-4	Pole foot	3.0
PJ-6P	6' aluminum pole	14.0
PJ-12P	12' aluminum pole	28.0
PJ-18P	18' aluminum pole	42.0
PJ-24P	24' aluminum pole	56.0
PJ-PC	Pole connector	12.0
PJ-SBF	Foldable support brace	9.0
PJ-SBR	Rigid support brace	14.0
PJ-WB	Work bench	15.0
PJ-ERN	End rail kit (narrow)	15.0
PJ-ERW	End rail kit (wide)	17.0
PJ-SN	Safety net	14.0

## NESTABLE STAGES

2-person - 500 lbs. rated


Model No.	Nestable Stage Description	Approx. Shipping Wt. Lbs.
WNS-2412	14" x 12'	46.0
WNS-2416	14" x 16'	63.0
WNS-2420	14" x 20'	86.0
WNS-2424	14" x 24'	115.0
WNS-2512	20" x 12'	54.0
WNS-2516	20" x 16'	75.0
WNS-2520	20" x 20'	103.0
WNS-2524	20" x 24'	122.0
WNS-2612	24" x 12'	62.0
WNS-2616	24" x 16'	81.0
WNS-2620	24" x 20'	116.0
WNS-2624	24" x 24'	139.0

## ALUMINUM TASK MASTER® STAGES

- **Twist-Proof Stage Design**
- **Ideal for ladder jack applications, swing stages or catwalks**

Individual slip-resistant decking minimizes paint or material build-up

Vinyl-coated end caps serve as hand grips and protect from sharp edges and surface marks

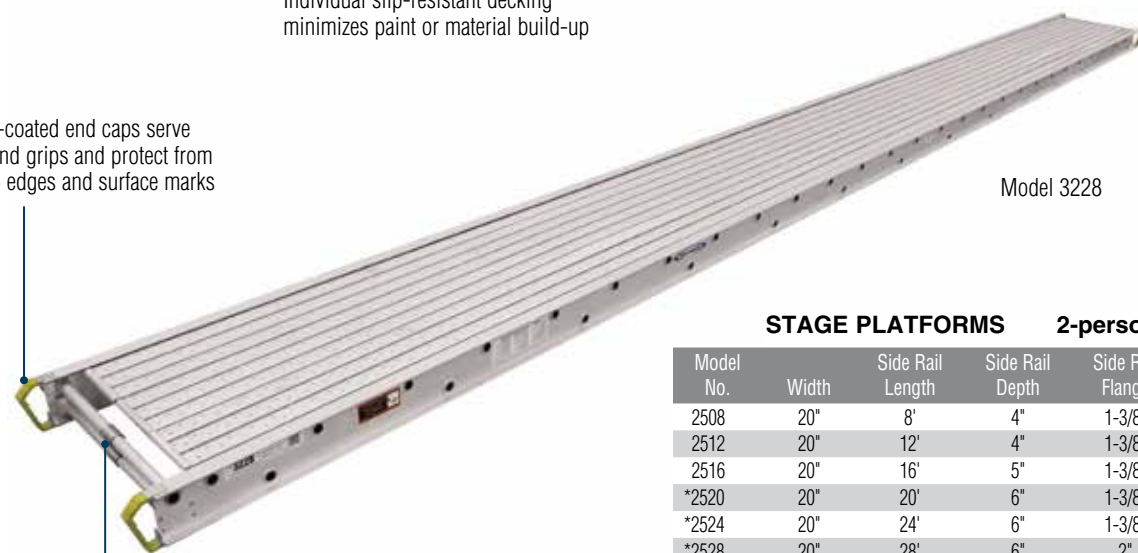

Model 3228

Double end rung provides extra rigidity on stages 20' or longer

**DECORATOR PLANKS 1-person - 250 lbs. rated**

Model No.	Width	Side Rail Length	Side Rail Depth	Side Rail Flange	Approx. Shipping Wt. Lbs.
2008	12"	8'	4"	1-3/8"	25.0
2012	12"	12'	4"	1-3/8"	36.0
2016	12"	16'	4"	1-3/8"	48.0
2020	12"	20'	5"	1-3/8"	65.0
2024	12"	24'	5"	1-3/8"	78.0

**SCAFFOLD PLANKS 2-person - 500 lbs. rated**

Model No.	Width	Side Rail Length	Side Rail Depth	Side Rail Flange	Approx. Shipping Wt. Lbs.
2316	12"	16'	4"	1-3/8"	48.0
2320	12"	20'	6"	1-3/8"	79.0
2324	12"	24'	6" Heavy Duty	1-3/8"	112.0
2328	12"	28'	6" Heavy Duty	1-3/8"	131.0
2330	12"	30'	6" Heavy Duty	1-3/8"	140.0
2332	12"	32'	6" Heavy Duty	1-3/8"	149.0
2408	14"	8'	4"	1-3/8"	27.0
2412	14"	12'	4"	1-3/8"	40.0
2416	14"	16'	5"	1-3/8"	58.0
2420	14"	20'	6"	1-3/8"	85.0
2424	14"	24'	6"	2"	109.0
2428	14"	28'	6"	2"	127.0
2432	14"	32'	6" Heavy Duty	2"	182.0

**STAGE PLATFORMS 2-person - 500 lbs. rated**

Model No.	Width	Side Rail Length	Side Rail Depth	Side Rail Flange	Approx. Shipping Wt. Lbs.
2508	20"	8'	4"	1-3/8"	33.0
2512	20"	12'	4"	1-3/8"	48.0
2516	20"	16'	5"	1-3/8"	70.0
*2520	20"	20'	6"	1-3/8"	102.0
*2524	20"	24'	6"	1-3/8"	121.0
*2528	20"	28'	6"	2"	157.0
*2532	20"	32'	6"	2"	179.0
2608	24"	8'	4"	1-3/8"	38.0
2612	24"	12'	4"	1-3/8"	56.0
2616	24"	16'	5"	1-3/8"	81.0
*2620	24"	20'	6"	1-3/8"	115.0
*2624	24"	24'	6"	1-3/8"	138.0
*2628	24"	28'	6"	2"	168.0
*2632	24"	32'	6"	2"	191.0
2708	28"	8'	4"	1-3/8"	41.0
2712	28"	12'	4"	1-3/8"	60.0
2716	28"	16'	5"	1-3/8"	87.0
*2720	28"	20'	6"	1-3/8"	124.0
*2724	28"	24'	6"	1-3/8"	147.0
*2728	28"	28'	6"	2"	187.0
*2732	28"	32'	6"	2"	213.0


**3-person - 750 lbs. rated**

3112	24"	12'	4"	2"	64.0
3116	24"	16'	5"	2"	92.0
*3120	24"	20'	5"	2"	115.0
*3124	24"	24'	6"	2"	145.0
*3128	24"	28'	6" Heavy Duty	2"	204.0
*3132	24"	32'	6" Heavy Duty	2"	236.0
*3136	24"	36'	6" Heavy Duty	2"	323.0
*3139	24"	39'	6" Heavy Duty	2"	365.0
3208	28"	8'	4"	2"	48.0
3212	28"	12'	4"	2"	71.0
3216	28"	16'	5"	2"	103.0
*3220	28"	20'	5"	2"	128.0
*3224	28"	24'	6"	2"	161.0
*3228	28"	28'	6" Heavy Duty	2"	220.0
*3232	28"	32'	6" Heavy Duty	2"	251.0
*3236†	28"	36'	6" Heavy Duty	2"	344.0
*3239†	28"	39'	6" Heavy Duty	2"	388.0

\*Includes set of double rungs at the end of stage.

†Includes reinforcing channel

# GUARD RAIL SYSTEMS

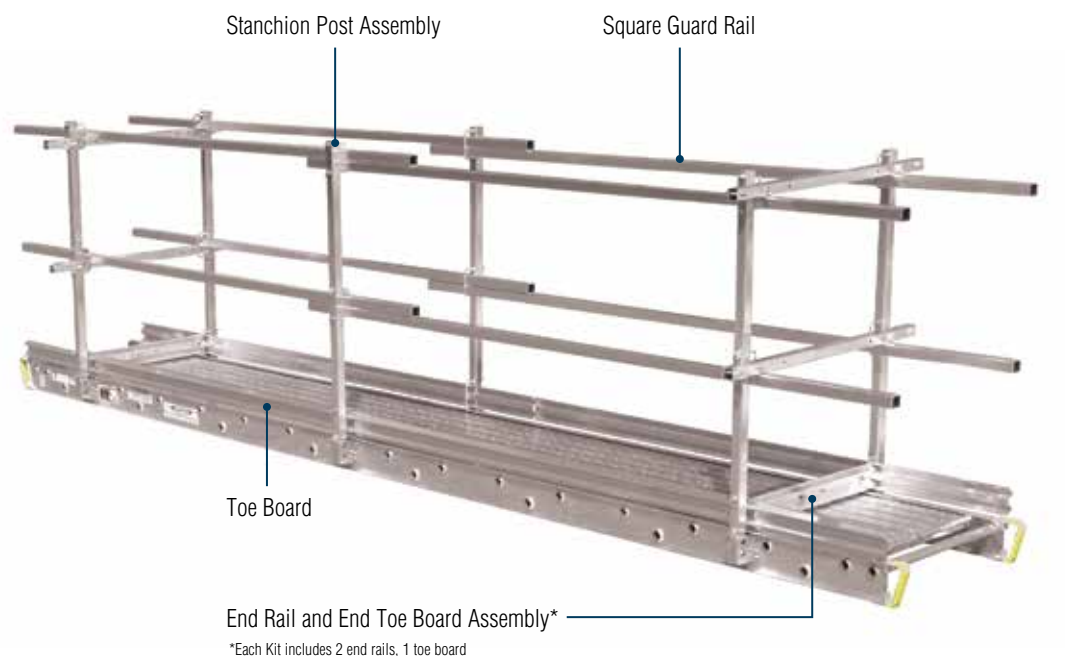

## SQUARE MODULAR GUARD RAIL SYSTEM

### System Sizing: How do I size a guard rail system?

The following steps show how to size a single-sided, three-sided, and four-sided guard rail system:

- Step 1: Determine the stage length and width.
- Step 2: Determine whether guardrail system is one-, two-, three-, or four-sided.
- Step 3: Read across the row to determine component requirements.
- Step 4: If ordering a three- or four-sided system, order two ERT-N for 12" and 14" wide stages, and two ERT-W for all stages 20" wide or greater.

*Note: If ordering a two sided system, double the single sided component requirement.*

Model No.	Description	Approx. Shipping Wt. Lbs.
ERT-N	End rail and end toe board assembly - narrow	4.5
ERT-W	End rail and end toe board assembly - wide	7.0
SSP-47	Stanchion post assembly	5.0
SGR-09	1-1/2" square guard rail cut length - 108"	6.0
SGR-13	1-1/2" square guard rail cut length - 156"	8.5
STB-09	3-1/2" toe board cut length - 108"	4.5
STB-13	3-1/2" toe board cut length - 156"	6.5

Stage Length	Single-sided					Three-sided					ERT-N/ ERT-W*	Four-sided					ERT-N/ ERT-W*
	SSP-47	SGR-09	SGR-13	STB-09	STB-13	SSP-47	SGR-09	SGR-13	STB-09	STB-13		SSP-47	SGR-09	SGR-13	STB-09	STB-13	
8'	2	2	0	1	0	4	2	0	1	0	2	4	4	0	2	0	2
12'	3	0	2	0	1	5	0	2	0	1	2	6	0	4	0	2	2
16'	3	4	0	2	0	5	4	0	2	0	2	6	8	0	4	0	2
20'	4	2	2	1	1	6	2	2	1	1	2	8	4	4	2	2	2
24'	5	4	2	2	1	7	4	2	2	1	2	10	8	4	4	2	2
28'	6	2	4	1	2	8	2	4	1	2	2	12	4	8	2	4	2
32'	6	2	4	1	2	8	2	4	1	2	2	12	4	8	2	4	2
36'	6	10	0	5	0	8	10	0	5	0	2	12	20	0	10	0	2
39'	7	4	4	2	2	9	4	4	2	2	2	14	8	8	4	4	2

\*ERT-N is for 12" and 14" wide stages; ERT-W is for 20" wide and greater stages





PaintCup &amp; PaintCupLiner



JobBucket



UtilityBucket



JobCaddy



UtilityHook



ToolLasso®

# CUSTOMIZE YOUR LADDER TOP



## AC27-P

### Paint Cup



Model No.	Fits on
AC27-P	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000, AC24

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
9-1/8" x 13-3/4" x 10-7/8"	4.0

*Shipping quantity  
(6) units per carton*

- Great for trim painting and cut-in applications
- Built-in magnet to secure a paint brush
- Holds 1 quart of paint
- Can be used with disposable Paint Cup Liner AC27-L

## AC27-L

### Paint Cup Liner



Model No.	Fits on
AC27-L	AC27-P

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
5-1/8" x 13-3/8" x 10"	2.2

*Shipping quantity  
(10) units per carton  
(40) liners per carton*

- Disposable liner makes clean up easy
- Each AC-27L unit includes 4 liners

## AC50-JB-3

### Job Bucket



Model No.	Fits on
AC50-JB-3	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
15-1/4" x 11-7/8" x 16-1/4"	6.6

*Shipping quantity  
(3) units per carton*

- Increase ladder storage and maximize your work space
- Integrated tape measure and screwdriver holders
- Top grooves hold round pipes in place
- 600 cubic inches of storage, 25 lbs. load capacity

## AC52-UB

### Utility Bucket



Model No.	Fits on
AC52-UB	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
13-1/2" x 10-3/4" x 10-3/4"	4.5

*Shipping quantity  
(3) units per carton*

- Expand your work surface
- Integrated Lock-In Socket for adding Paint Cup, ToolLasso® or Utility Hook
- Ideal for wet or dry applications
- Holds up to one gallon of liquid, 25 lbs. capacity

## AC54-JC

### Job Caddy



Model No.	Fits on
AC54-JC	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
15-1/2" x 8-3/8" x 10-3/8"	6.7

*Shipping quantity  
(3) units per carton*

- Holds large or odd shaped items like fluorescent bulbs or ceiling fan blades
- 4 storage compartments keep small parts separated
- Screwdriver, pliers, putty knife & towel holders
- End hook built in for increased convenience

## AC58-TL

### Tool Lasso®



Model No.	Fits on
AC58-TL	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000, AC24, PS-48

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
10-7/8" x 12-1/4" x 9-3/4"	4.0

*Shipping quantity  
(12) units per carton*

- Secures tools from falling
- Wraps around the grip of power tools, hand tools and caulk guns
- Locks into HolsterTop® to keep tools safe and ready to use
- Compatible with the ToolLasso® belt clip
- AC58-TL includes 1 belt clip and 2 ToolLassos

## AC11

### Stepladder Hanger



Kit No.	Approx. Shipping Weight
AC11	1.8 lbs. each

Hanger can be mounted on a wall to hold stepladders. Industrial strength coated steel wire construction.

#### **User Installed Only**

*Shipping quantity  
(6) units per carton*

## 76

### Molded Plastic Pail Shelf



Kit No.	Fits on Fiberglass Series	Approx. Ship. Wt.
76-2	6000 6200	2.5 lbs.

Spill-Proof®, rugged construction, easy to keep clean, automatically closes with stepladder. Pail shelf comes with mounting hardware and instructions.

#### **User Installed Only**

*Shipping quantity  
(2) units per carton*

## 40

### Casters/Bracket Kits



Kit No.	Fits on Series	Approx. Ship. Wt.
40-2HD	PT370, PT6000 PT7400 (MK 4 & up)	5.0 lbs.

Note: Fits only ladder originally equipped with casters.

Heavy duty aluminum bracket with 4" caster allows 360° mobility of ladder. Soft rubber wheels are easy on floors; designed to roll over door thresholds. Casters may be used on all 4 legs; order 2 kits for this purpose. Two (2) casters/brackets come with mounting hardware and instructions.

Order models below as a "-4C" for factory installation.

#### **User Installed Only**

## AC24

### Multipurpose Project Tray



Kit No.	Fits on	Approx. Shipping Wt.
AC24	MT Series M1 Series Type IA (300 lbs.) & Type IAA (375 lbs.) Stepladders	2.8 lbs.

Project Tray conveniently holds tools, paints and supplies. Made for Werner multiladders and stepladders. Attaches easily; works at multiple heights; includes ToolLasso®.

#### **User Installed Only**





## EASY TO INSTALL, CONTROL AND LEVEL

- Installs up to 50% faster  
*\*Compared to average installation time of the Werner PK80 Leveler*
- No ladder cutting required
- Place ladder on uneven surfaces & leveler adjusts to find level
- Easy ladder control and leveling precision for a safe, stable ascension



## SPECIFICATIONS

KIT NO.	FITS ON WERNER EXTENSION LADDER SERIES	LADDER SIZE	APPROX. SHIPPING WEIGHT (LBS)	APPROX. ADDED WEIGHT TO LADDER (LBS)
PK100	<b>Fiberglass Series:</b> D5900-2/FE2000-2, D6000-2/FE1000-2, D6200-2, D6200-3, T6200-2GS, D7100-2, 7100-2	ALL	14.862 lbs	13.806 lbs
PK100	<b>Aluminum Series:</b> D1200-2, D1300-2, D500-2	ALL	14.862 lbs	13.806 lbs


## COMPATIBLE WITH WERNER EXTENSION LADDERS - TYPE II, I, IA & IAA DUTY RATINGS

**Compatible Models:** D1200-2, D1300-2, D500-2, D5900-2/FE2000-2, D6000-2/FE1000-2, D6200-2, D6200-3, T6200-2GS, D7100-2, & 7100-2

**TO LEARN MORE ABOUT  
COMPATIBILITY, go to page 38**





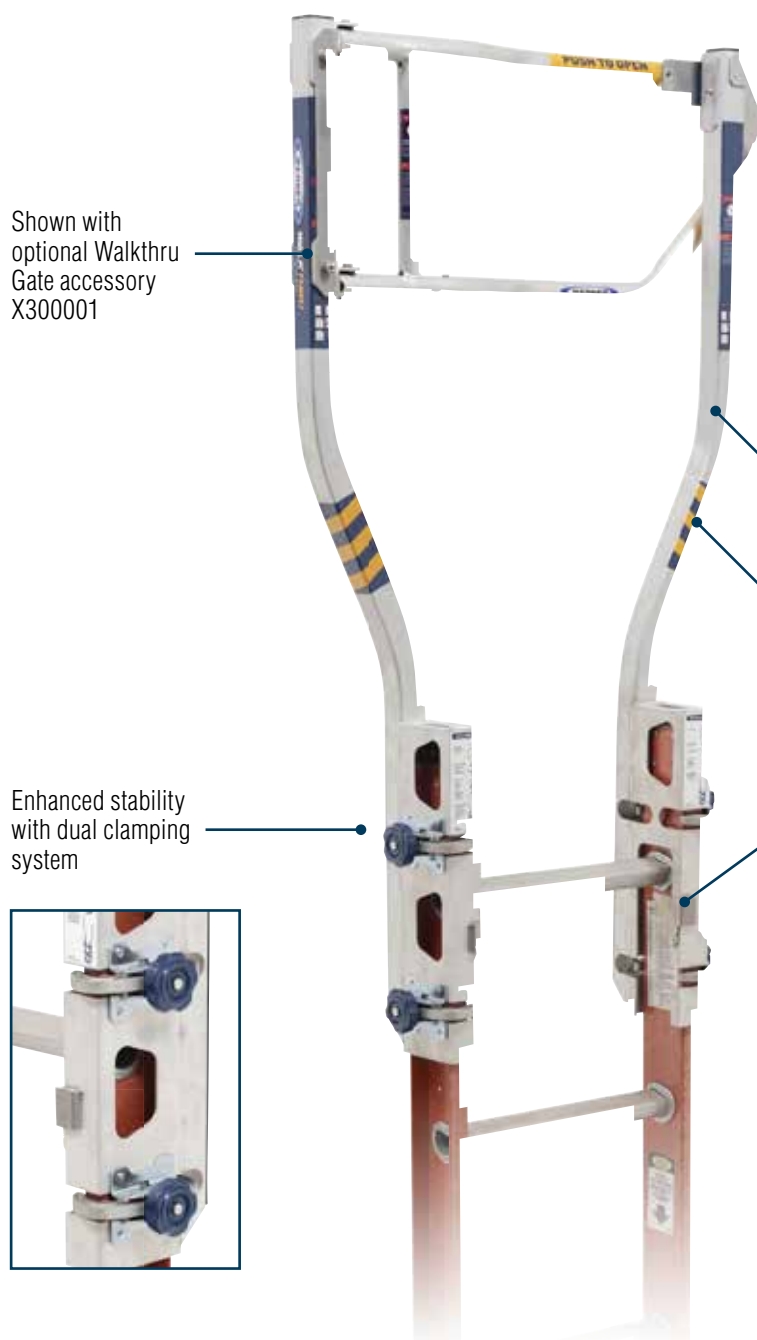

- Provides ergonomic transition area from ladder to roof, eliminating the need to step around the ladder
- Wide base provides additional contact area on the worksurface making a safer transition to and from the access point
- Spring closed gate accessory also available
- Easy to install and uninstall

Brace arms are designed for optimal descending and handles positioned for best ergonomics

Violator markings for visibility

Latch spring mechanism fits securely in place

LADDER*	DUTY RATING	
Type IAA	Special Duty	375 lbs
Type IA	Extra Heavy Duty	300 lbs
Type I	Heavy Duty	250 lbs
Type II	Standard	225 lbs

Meets Compliance Standards  
OSHA 1910 & 1926



MODEL #	ITEM NAME	SHIPPING HEIGHT	SHIPPING LENGTH	SHIPPING WIDTH	SHIPPING WEIGHT	PRODUCT WEIGHT
X300000	Extension Ladder WalkThru	7.1 in	51 in	9.75 in	11 lbs	10.5 lbs
X300001	Extension Ladder WalkThru Gate	3.75 in	30.7 in	14.17 in	4 lbs	4 lbs

\*Not compatible with 7800, 500-1,500-3,7100-1(manhole ladders only),9500-1,9500-2, D1300-2 & D1800-2EQ series ladders.

**AC78****Quickclick™ Stabilizer**

Kit No.	For use on Singles and Extensions with	Approx. Ship Wt.
AC78	1-1/4" round rungs 1-1/2" flat rungs 1-3/4" flat rungs 1-5/8" flat rungs	6.4 lbs.

Span: 44", Standoff :10"  
Requires no tools. Spring-loaded locking latch makes it easier and quicker to install/remove than any other stabilizer on the market.  
Mar-resistant rubber end caps protect work surface. Stabilizer comes with instructions. Paint can hook included.

**User Installed Only**  
**Not for use on Werner MultiLadders, Type III Aluminum or Type II Fiberglass extension ladders**

Shipping quantity (1) unit per carton

**AC96****Aluminum Stabilizer**

Kit No.	Fits on	Ladder Size	Approx. Ship. Wt.
AC96	Aluminum Series Extension Ladders with rails up to 3" x 1-3/16"	ALL	4.5 lbs.
	D716	16'	
	D1100	ALL	
	D1200	ALL	
	D1300	ALL	
	D1500	ALL	
	D500	20' - 24'	
	MT	ALL	
	M1	ALL	

Span: 47", Standoff :10"  
For use on aluminum ladders of all duty ratings. Attaches in minutes. Mar-resistant rubber caps protect work surface. Paint can hook included. Comes with mounting hardware and instructions.

**User Installed Only**  
**Ideal for stabilizing M1 MultiLadder when in scaffold or stairway positions**

Shipping quantity (6) units per carton

**97P****Adjustable True Grip® Stabilizer & Surface Protectors**

Kit No.	Fits on Aluminum Series	Ladder Size
97P	D716-2	16'
	D1100	ALL
	D1200	ALL
	D1300	ALL
	D1500	ALL
	D500-2	20' - 24'
	D1700-2EQ	ALL
	D1800-2EQ	ALL

Note: Not to be used on Multi-Ladders

Approx. Shipping Weight

9.5 lbs.

Span adjustment : 49", 57" or 65"  
Stand-off distance: 12" or 29-1/2"  
Rectangular stabilizer spans double windows. Quickly converts stand off distance for larger overhangs. Mounts quickly and easily. This comes with one (1) stabilizer, rubber pads, fleece bonnets, mounting hardware and instructions.

- Fits rail up to 3" x 1-3/16"

**User Installed Only**

**AC19****Extension Ladder Covers**

Kit No.	Fits on	Approx. Shipping Wt.
AC19-2	ALL Single and Extension Fiberglass and Aluminum Ladders (except 500, D1300-2 Series, D500, D7136-2, D7140-2)	1.2 lbs. each

Helps prevent damage to support surfaces. Designed to 'snap' over extension ladder rail end caps. Resists paints, stains, thinners and solvents.

**User Installed Only**

Shipping quantity 1 pair per unit;  
(6) units per carton

**71/A71****Padded Fixed V-Rung**

Kit No.	Fits on Fiberglass Series	Ladder Size
71-1	D6200-2, 7100-2	ALL
	D7100-2	16' - 32'
	7800	ALL

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A71	D6200-1, D6200-2	ALL
	7100-1	Up to 16'
	7100-2, 7800	ALL
	D7100-2	16' - 32'

Approx. Shipping Weight

71-1: 1.5 lbs., 71-4: 2.0 lbs

Approx. Added Weight to Ladder for Factory Install

1.4 lbs.

Slip-resistant rubber grip attached to steel v-rung for wood, metal or concrete poles. Pre-pierced holes in fiberglass top rails are provided to accept this accessory. V-rung assembly comes with mounting hardware and instructions.

**72/A72****Adjustable Pole Strap**

Kit No.	Fits on Fiberglass Series	Ladder Size	Approx. Ship. Wt.
72-2	D6200-2	ALL	1.3 lbs.
	7100-2	Up to 16'	
	D7100-2	16' - 32'	

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A72	D6200-2	ALL
	7100-1	Up to 16'
	7100-2	ALL
	D7100-2	16' - 32'

Adjustable strap design for all diameter poles. Slip-resistant rubber grip stitched to strap. Strap assembly comes with mounting hardware and instructions.

**User or Factory Installed**

**74/A74****Cable Hooks**

Kit No.	Fits on Fiberglass Series	Ladder Size	Approx. Ship. Wt.
74-1	D6200-2	ALL	2.6 lbs.
	7100-1	Up to 16'	
	7100-2	ALL	
	D7100-2	16' - 32'	

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A74	D7100-2	ALL

Easily folds within side rails for storage. Cable hooks can be mounted above or below top rung. Consult Werner if using in conjunction with other accessories. Cable hooks come with mounting hardware and instructions.

**User or Factory Installed**


**81/A81****Adjustable Pole Strap**

Kit No.	Fits on Fiberglass Series	Ladder Size	Approx. Shipping Wt.
81-3	D7100-2	36' - 40'	1.5 lbs.

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A81	D6200-2	ALL
	7100-1	ALL
	7100-2	ALL
	D7100-2	ALL

For use with ladders having hoop style end caps only. Adjustable strap design for all diameter poles. Adjustable pole lash comes with mounting hardware and instructions.

**User or Factory Installed**

**91****Adjustable Pole Lash Assembly w/ Angle Brackets**

Kit No.	Fits on Fiberglass Series	Ladder Size	Approx. Shipping Wt.
91-2	D6200-2 7100-2 D7100-2	ALL ALL 16' - 32'	2.0 lbs.

This assembly comes with brackets for independent use; wraps around pole. Strap design for all diameter poles. Adjustable pole lash assembly comes with two (2) angle brackets, mounting hardware and instructions.

**User Installed Only**

**94****Ladder-Cinch™**

Kit No.	Fits All	Ladder Size	Approx. Shipping Wt.
94-2	Fiberglass Series Extension Ladders	ALL	1.0 lbs.

Use as a quick tie down. Strap designed for all diameter poles. One (1) Ladder-Cinch™ assembly, storage bag and instructions.

**User Installed Only**

**92/A92****Cable Hook and V-Rung Assembly**

Kit No.	Fits on Fiberglass Series	Ladder Size
92-88	D6200-2 D8200-2EQ	16' - 40' 20' - 28'
92-89	7100-2, D7100-2 D7100-2LV	16' - 32' 20' - 32'

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A92	D6200-2 D6200-3 7100-2 7100-1 D8200-2EQ D7100-2 D7100-2LV	ALL ALL ALL 8' - 16' ALL 16' - 32' 20' - 32'

Approx. Shipping Weight

4.0 lbs.

Approx. Added Weight to Ladder for Factory Install

3.0 lbs.

Functions as both cable hook and v-rung. For use in applications where the diameter of the pole at the point of support does not exceed 10". Steel v-rung has rubber pad for slip-resistant performance. One (1) cable hook and v-rung assembly, mounting hardware and instructions included.

**User or Factory Installed**

**A62****Flange Guards**

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A62	7100-2 7200-2 D7100-2 D7200-2 D8100-2	16' - 32' ALL 16' - 32' ALL ALL

Approx. Added Weight to Ladder for Factory Install

4.0 lbs.

Black plastic guards prevent damage to ladder rails.

**Factory Installed Only**

**66-1/A66-1****Reflective Tape**

Kit No.	Fits on	Approx. Ship. Wt.
66-1	All Ladders	0.04 lbs.

Factory Install No.	Fits on	Ladder Size
A66-1	All Ladders	ALL

Highly reflective tape to add visibility to ladders. User-installed kit includes two 12" strips.

**User or Factory Installed**



**LADDER JACKS**

Recommended for use with 300 lbs. Type IA and 375 lbs. Type IAA extension ladders (OSHA and ANSI allow use with 250 lbs. Type I extension ladders also)

**User Installed Only**

2-Rung Model AC10-14-02  
Short Body  
Accepts Stages to 14" width



2-Rung Model AC10-20-02  
Long Body  
Accepts Stages to 20" width




3-Rung Model AC10-20-03  
Long Body  
Accepts Stages to 20" width

- Lightweight, sturdy, easy to use
- Designed for quick field adjustments
- Mounts on either side of extension ladder

Kit No.	Approx. Shipping Wt.
AC10-14-02	15.0 lbs.
AC10-20-02	18.0 lbs.
AC10-20-03	20.0 lbs.

*Shipping quantity*  
2 per unit;  
(1) unit per carton



**PLATFORM CLAMP SYSTEM**  
Clamp secures platform to ladder jacks and ties supporting ladders together to help secure entire ladder jack system

**AC18MT****Platform**

Kit No.	Fits on All	Approx. Shipping Wt.
AC18MT	MT Series	4.5 lbs.

Slip-resistant surface. Aluminum construction. Kicks out of way for easy climbing. 300 lbs. load capacity.

**User Installed Only****ARB10-10****Adjustable Roof Bracket**

Carton Dimensions	Approx. Shipping Wt.
4-5/8" x 19-1/2" x 14-1/4"	25.0 lbs.

**User Installed Only**

*Shipping quantity*  
(10) units per carton

**AC22****Paint Can/Bucket Hanger**

Kit No.	Fits on	Approx. Ship. Wt.
AC22	ALL Extension Ladders	0.5 lbs. each

Holds one gallon can. Easy on and off. Right or left hand use. Plated steel.

**User Installed Only**

*Shipping quantity*  
(6) units per carton

**A82****Red Rungs**

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A82-1	D7100-2	16' - 32'
	D7200-2	16' - 32'
	D8100-2	ALL
A82-2	D7100-2	ALL
A82-3	D7100-2	36' - 40'

Set of 3 painted red rungs for fiberglass extension ladders. Available for rung-plate models only.

**Factory Installed Only****A83****Rubber Padded Shoe**

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A83	D6200-1	ALL
	D6200-2	16' - 32'
	7100-1	Up to 16'
	7100-2	ALL
	D7100-2	16' - 32'

Approx. Added Weight to Ladder for Factory Install  
2.2 lbs.

Aluminum protective rail shield and rubber padded foot. Comes with two (2) padded shoes.

**Factory Installed Only****86/A89****Spur Shoe**

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A86	D6200-1	ALL
	D6200-2	16' - 32'
	7100-1	Up to 16'
	7100-2	ALL
	D7100-2	16' - 32'

Approx. Shipping Weight  
2.5 lbs.


Approx. Added Weight to Ladder for Factory Install  
2.0 lbs.

Plated steel spur for use on penetrable surfaces. Two (2) spur shoe assemblies, mounting hardware and instructions included.

**User or Factory Installed**

**A78**

Fly Section Shoes w/ Quick Disconnect



Factory Install No.	Fits on Fiberglass Series	Ladder Size
A78	D6200-2	ALL
	7100-2	ALL
	D7100-2	16' - 32'

Approx. Added Weight to Ladder for Factory Install  
1.5 lbs.

Combination aluminum rail shield bracket and hoop shoe with corrugated slip-resistant extruded rubber pad on fly section, allows use as a single or manhole ladder assembly.

**Factory Installed Only****36-82**

Attic Ladder Assist Pole



Kit No.	Fits on	Approx. Shipping Wt.
36-82	ALL Attic Ladders	3.0 lbs. each

3' assist pole allow easy access and smooth opening of attic ladder door.

**User Installed Only****L210240P**

Ladder Utility Lifeline



Model No.	UPC
L210240P	051751147162

Product Weight  
7.6 lbs.

**L210240P-1**

Petzl ASAP® Absorber with Rope



Model No.	UPC
L210240P-1	051751147551

Product Weight  
4.54 lbs.

**L210240P-2**

Tensioner Grab (N660 with sewn tether)



Model No.	UPC
L210240P-2	051751147568

Product Weight  
.6 lbs.

**L210240P-3**

Utility Lifeline Rope Only



Model No.	UPC
L210240P-3	051751147575

Product Weight  
2.75 lbs.

**X300002**

Ladder Stability Clamp



Model No.	Clamp Length	Clamp Width	Clamp Height
X300002	4.4"	2.5"	4.9"

Product Weight  
2.1 lbs.

- Durable aluminum construction
- Screw clamp adjustment
- High strength polypropylene ladder strap
- Quick-connect strap clip for ease of connection
- Swivel clip to reduce strap twisting
- Easy adjusting ladder connection strap
- Does not require penetrations or tools to use



U.S. HEADQUARTERS

Werner Co.

555 Pierce Rd., STE 300

Itasca, IL 60143

To contact us, please visit:

[WERNERCO.COM](http://WERNERCO.COM)